

2016.0 RANGE ROVER (LG), 501-03

BODY CLOSURES

FRONT DOOR WEATHERSTRIP (G1707347)

REMOVAL AND INSTALLATION


REMOVAL

NOTES:


- Some variation in the illustrations may occur, but the essential information is always correct.
- Left Hand illustration shown, Right Hand is similar.

1. Refer to: [Front Door Trim Panel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).


2.

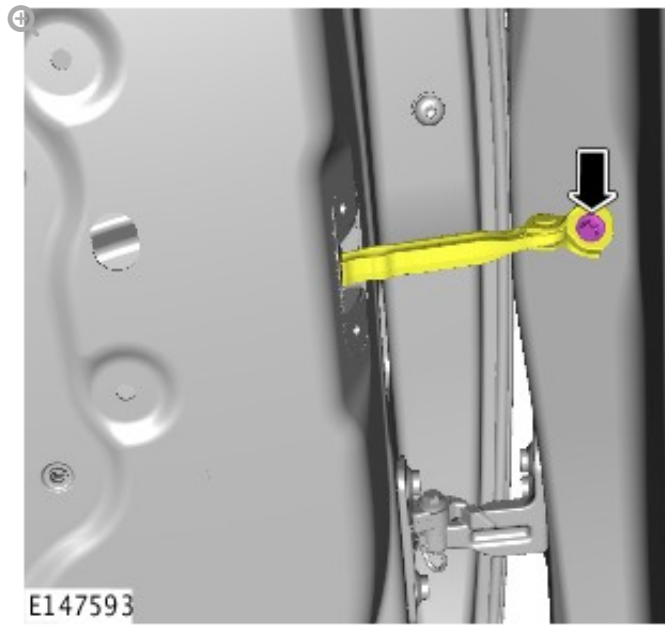

3.

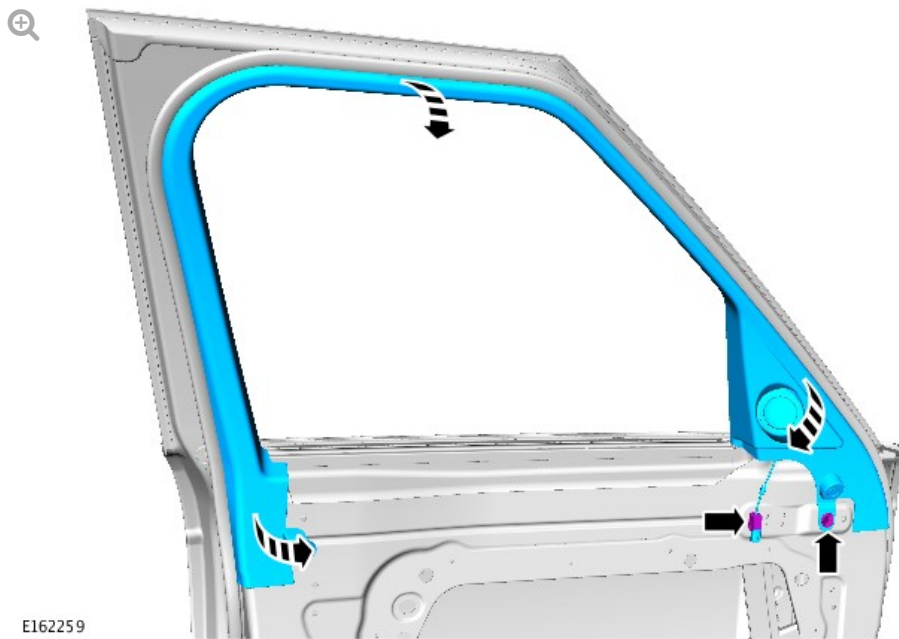


4.

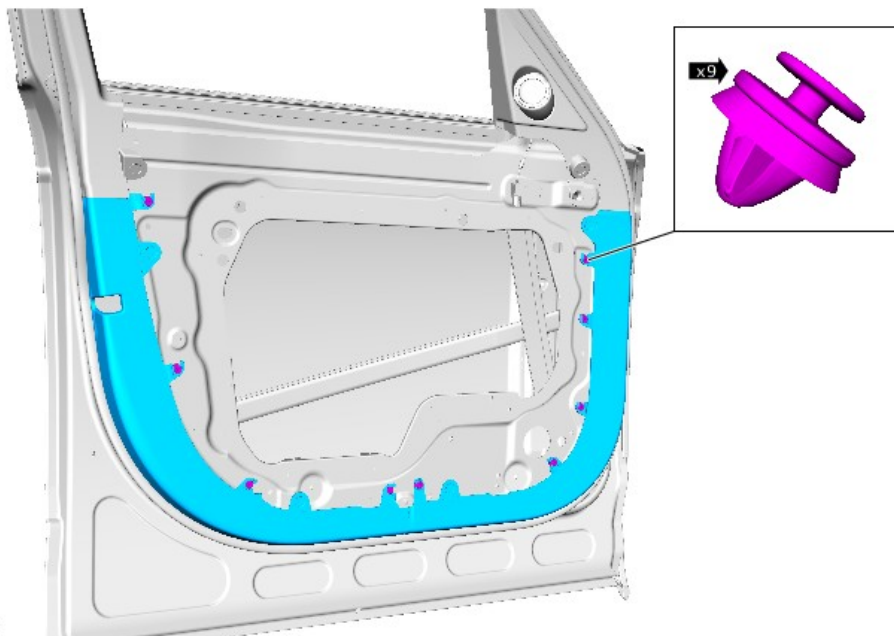

E162258

5.

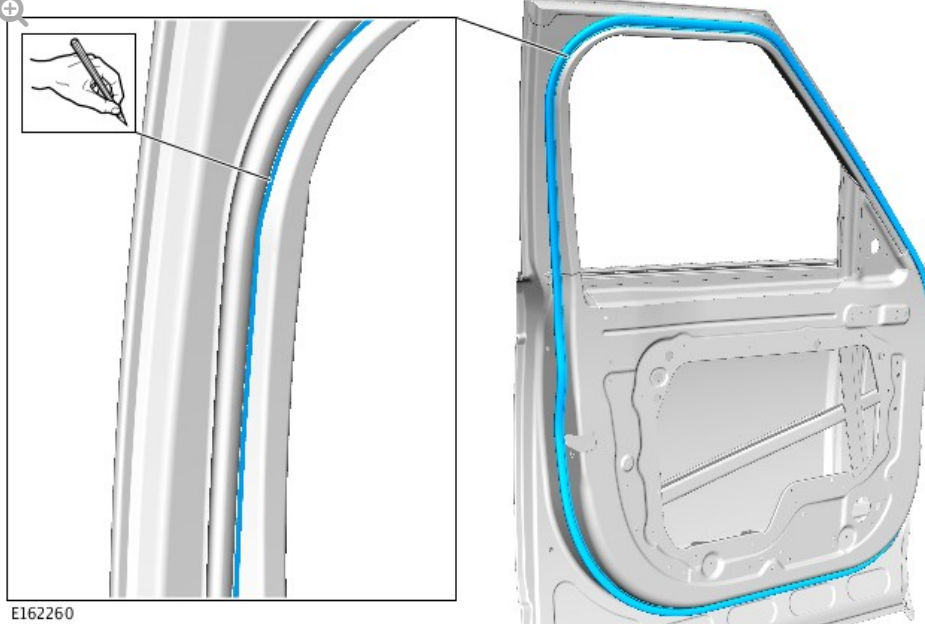


E162260

Using a suitable non-permanent marker, mark the installed position of existing seal.

6.

NOTE:

Discard the door seal.

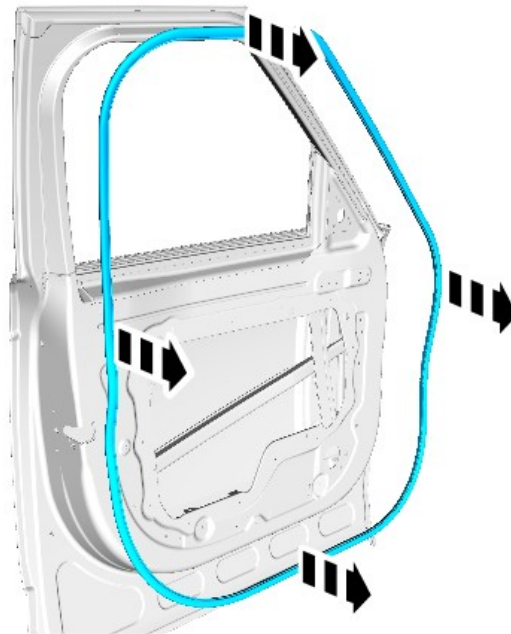


E162261

INSTALLATION

1.


CAUTIONS:

- To aid the bonding process the ambient air temperature must be above 20 degrees C.
- The door seal must not be installed outward of the marked outline.

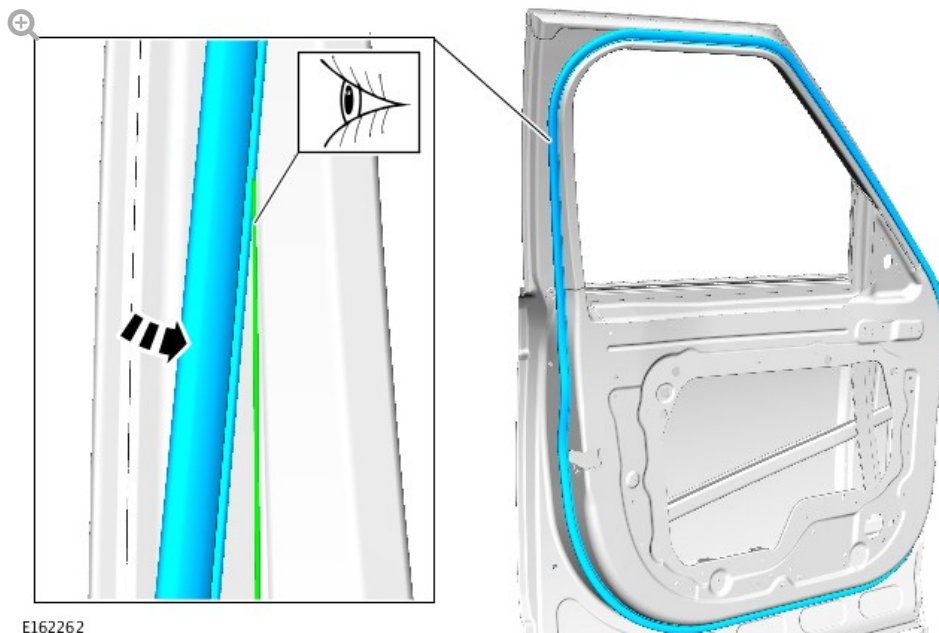


- Using a suitable clean agent, thoroughly clean the adhesive contact area.
 - Install the door seal to the marked outline.
- 3.** Press the door seal firmly into place.

2.

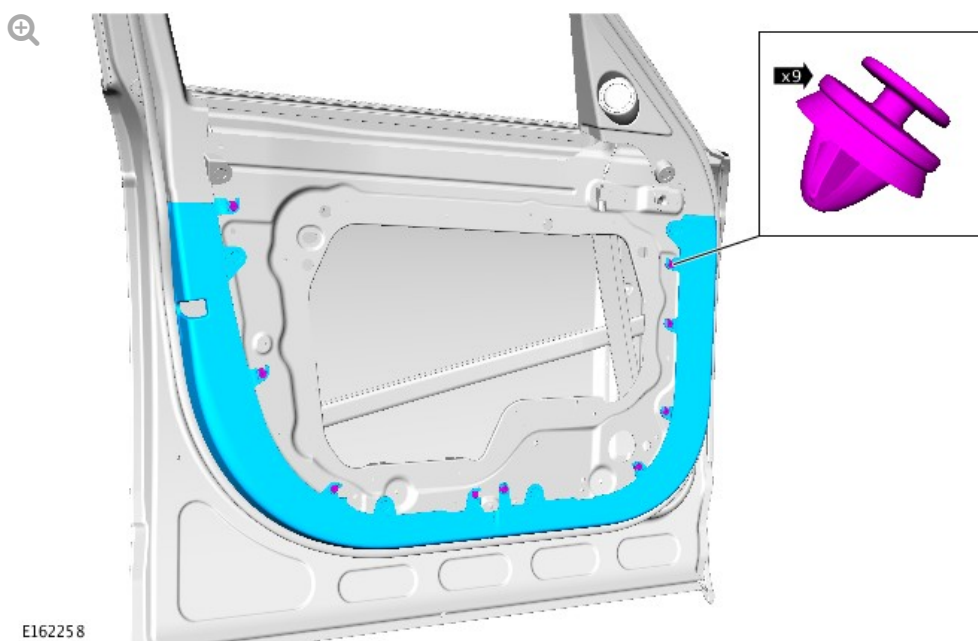


3.

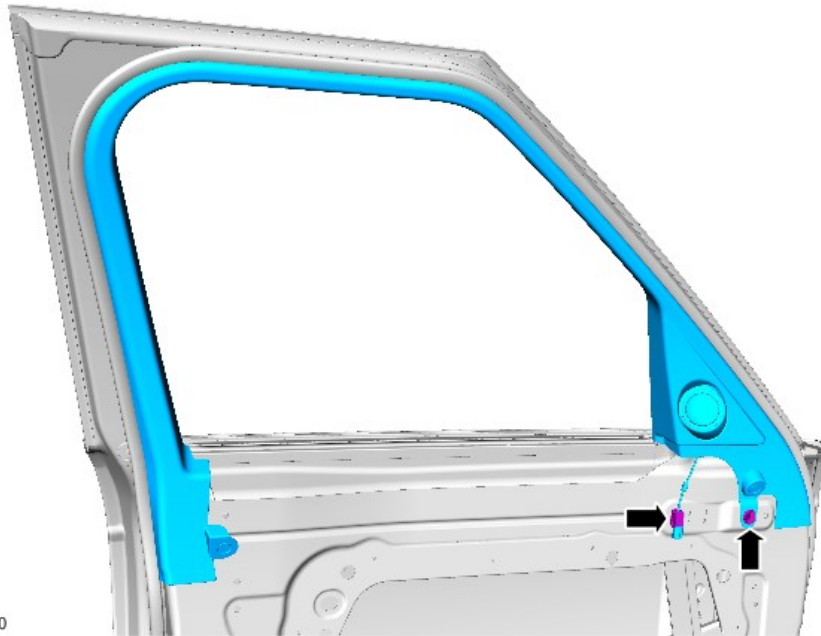

E162270

4.

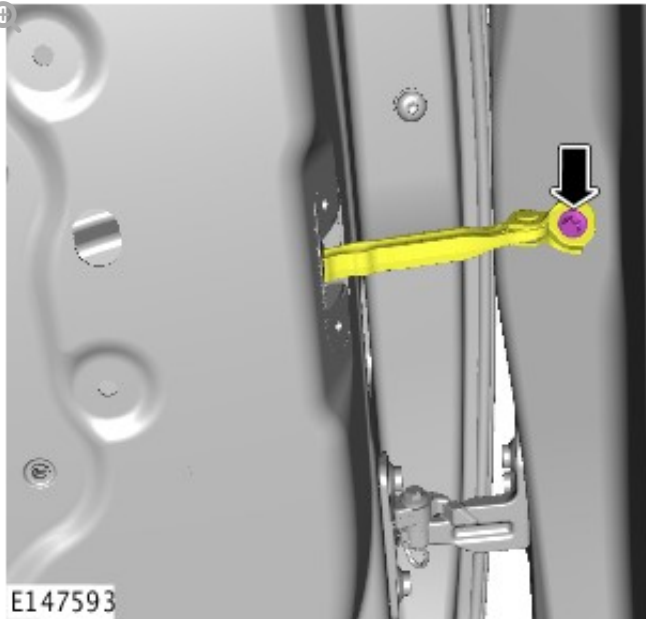

E147593

Torque: 24 Nm

5. Refer to: [Front Door Trim Panel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).