

2016.0 RANGE ROVER (LG), 501-19

BUMPERS

FRONT BUMPER (G1520865)

REMOVAL AND INSTALLATION

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1.


WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2. Refer to: [Speed Control Sensor](#) (310-03B Speed Control - V6 S/C 3.0L Petrol, Removal and Installation).

3.

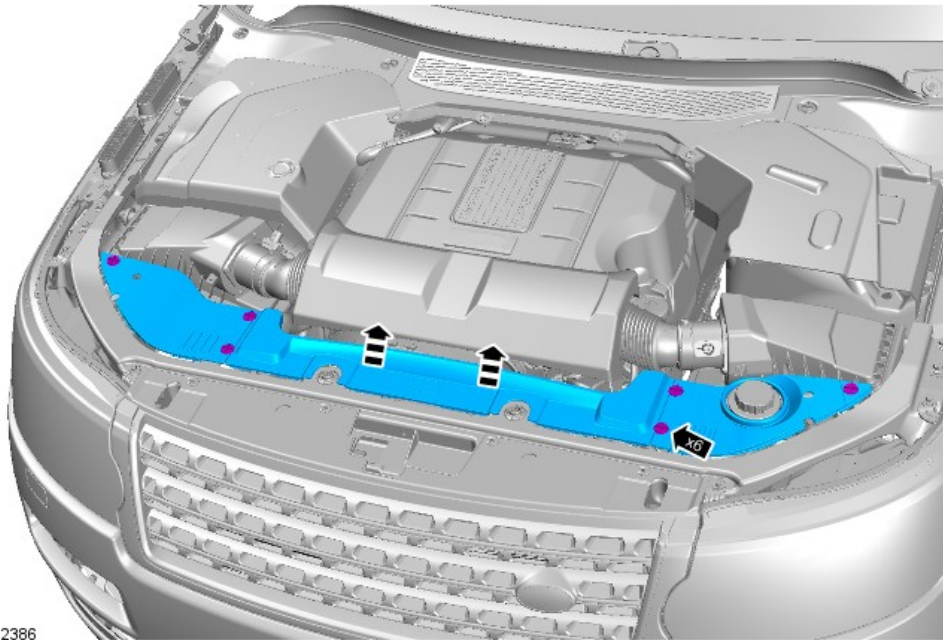


E142386

4.


NOTES:

- The step must be carried out on both sides.
- LH illustration shown, RH is similar.

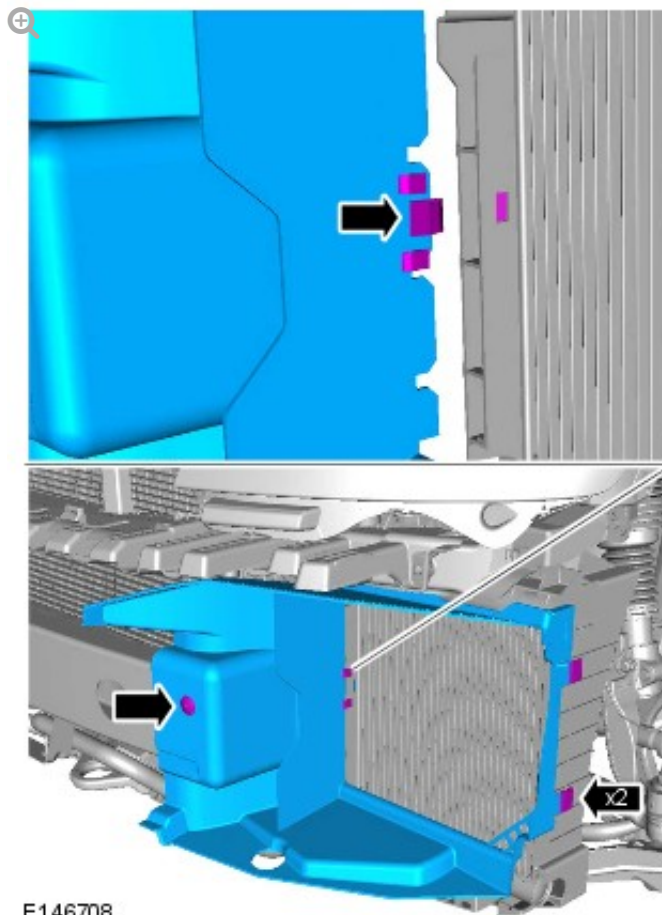

E146708

5.

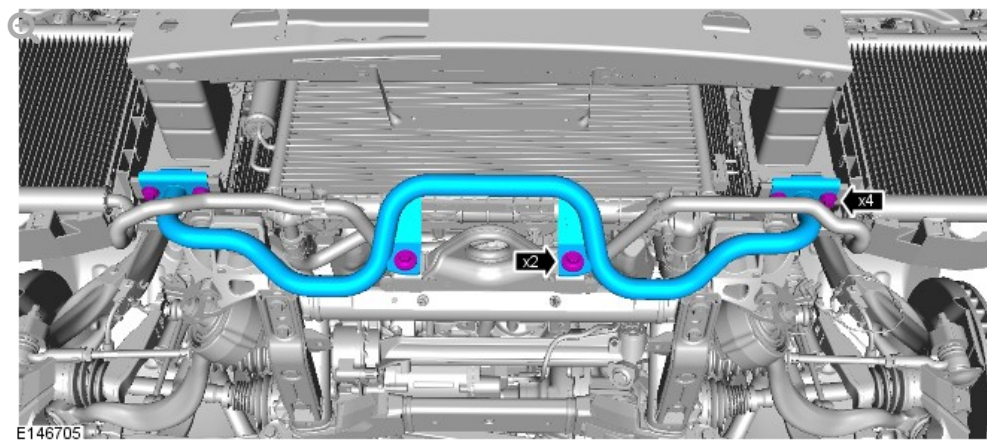

Torque:


M10 45 Nm

M12 90 Nm

6.


CAUTION:

Be prepared to collect escaping coolant.

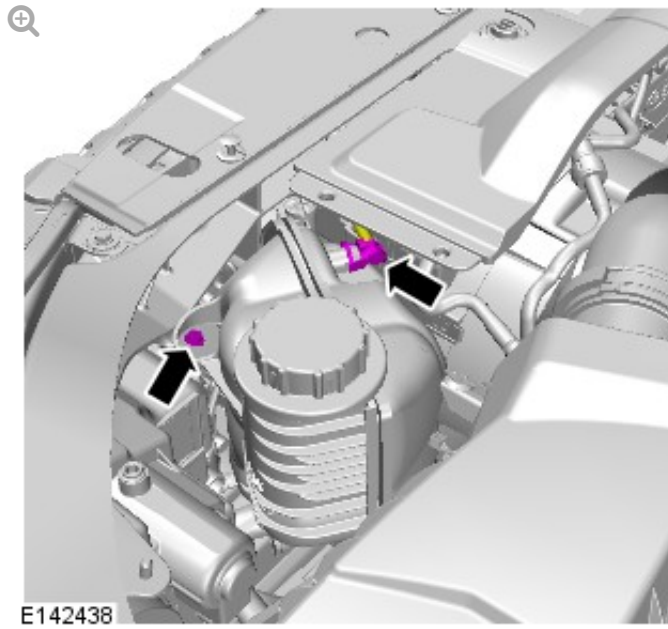


Torque: 9 Nm

7.

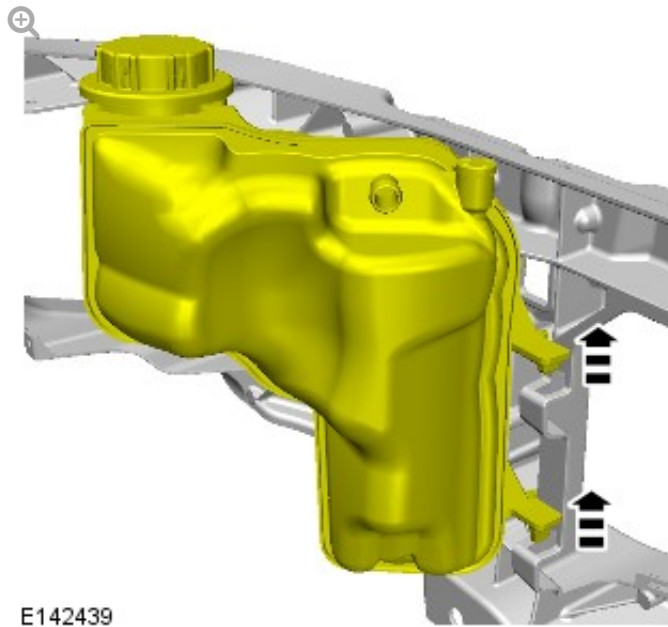


8.

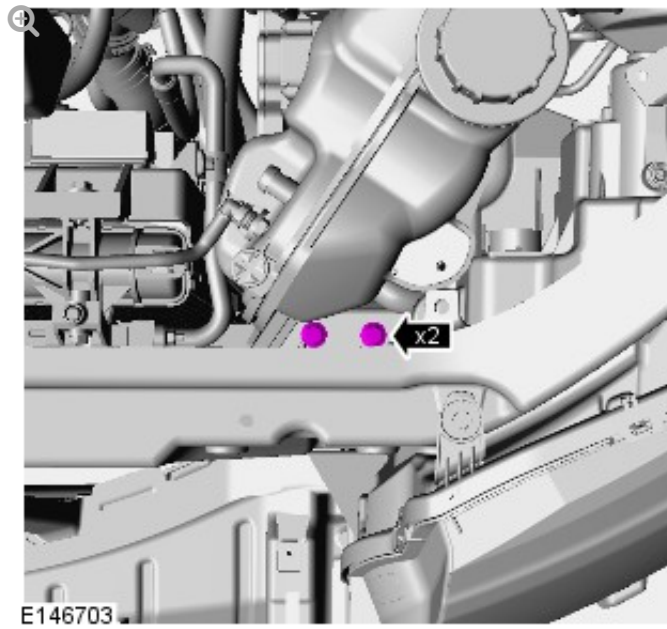


Torque: 30 Nm

9.

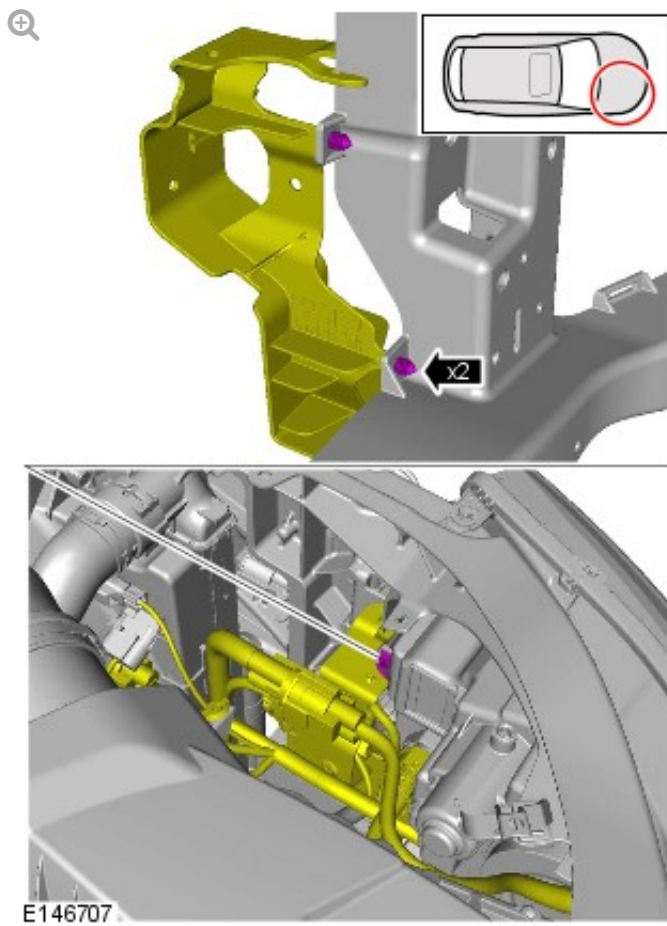


10.

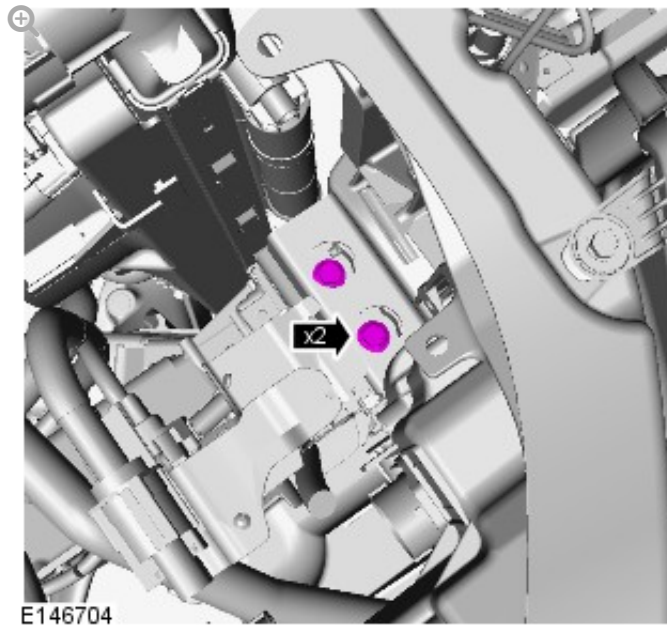


Torque: 30 Nm

11.

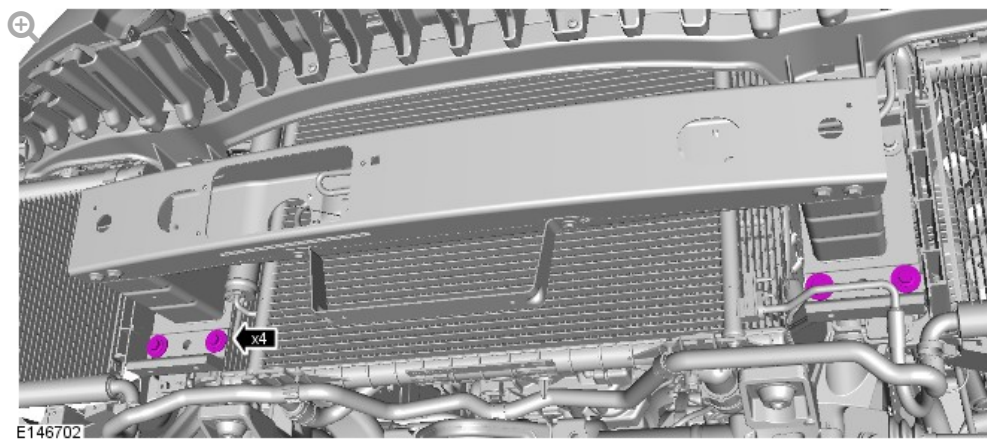

Torque: 55 Nm

12.

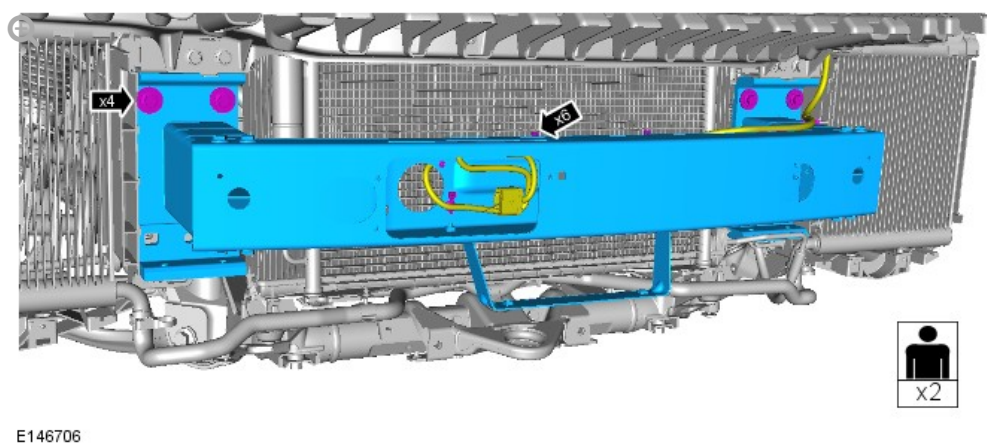

Torque: 55 Nm

INSTALLATION

1. To install, reverse the removal procedure.