

2016.0 RANGE ROVER (LG), 501-19

BUMPERS

REAR BUMPER COVER (G1890687)

REMOVAL AND INSTALLATION

REMOVAL

NOTES:

- Some variation in the illustrations may occur, but the essential information is always correct.
- Some components shown removed for clarity.
- Removal steps in this procedure may contain installation details.


1.

WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

2.

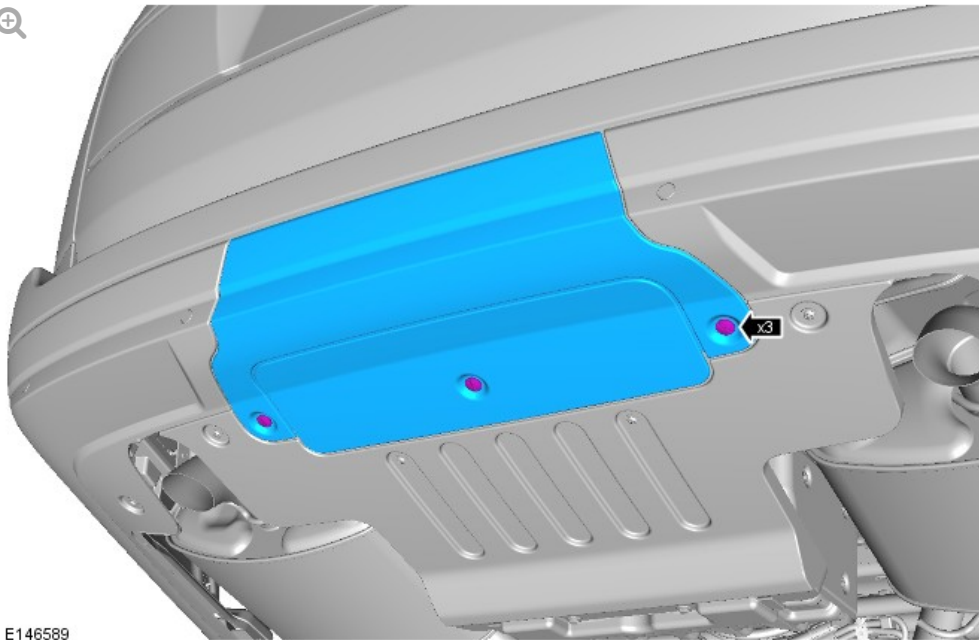


E146589

3.

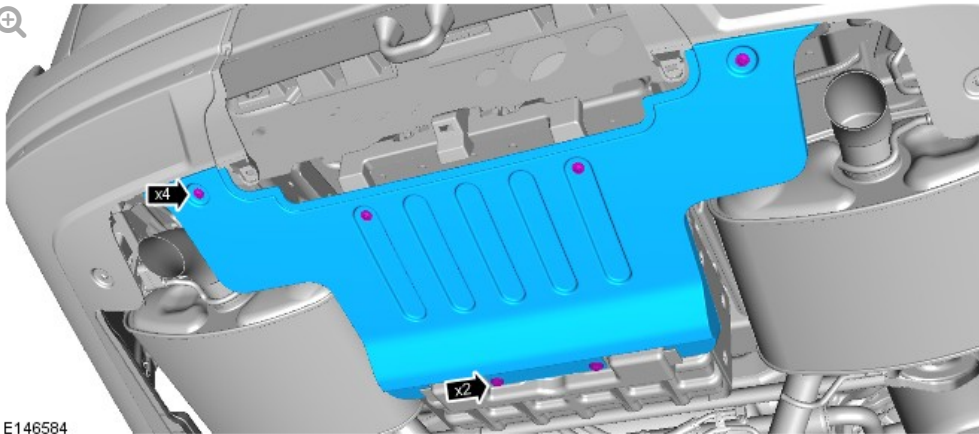

E146584


4.

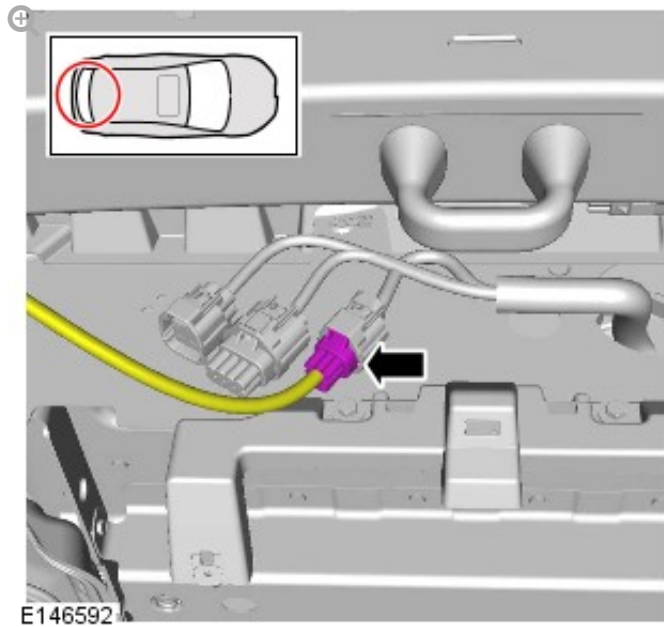

5.

NOTE:

Repeat the step for the other side.

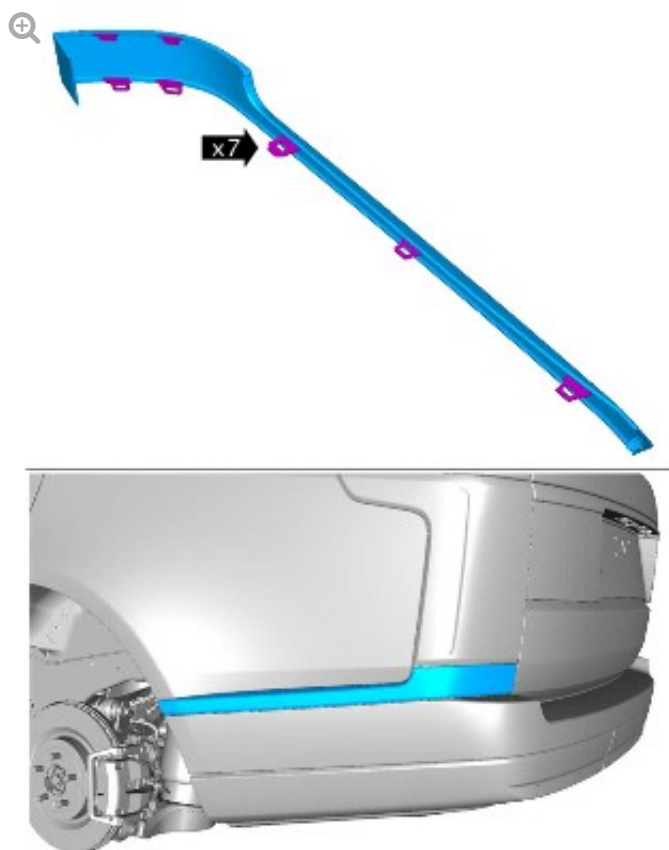


E156716

6.

NOTE:

Repeat the step for the other side.

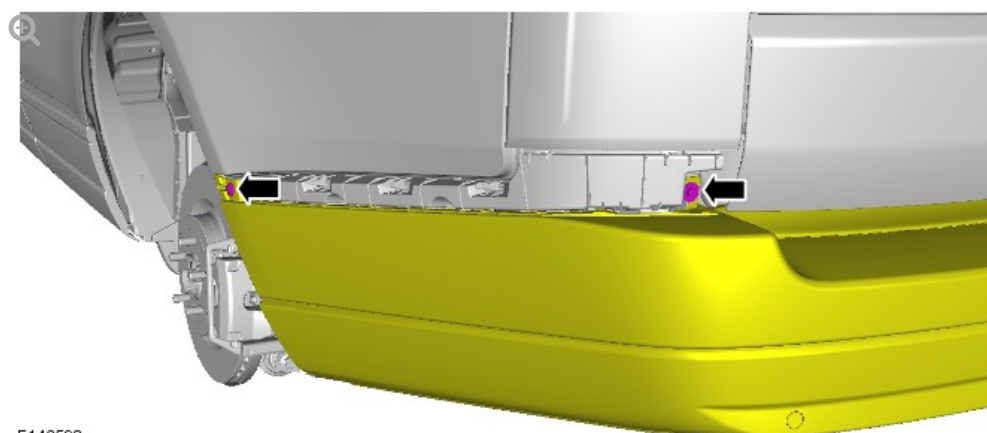


E146593

7.


NOTE:

Repeat the step for the other side.

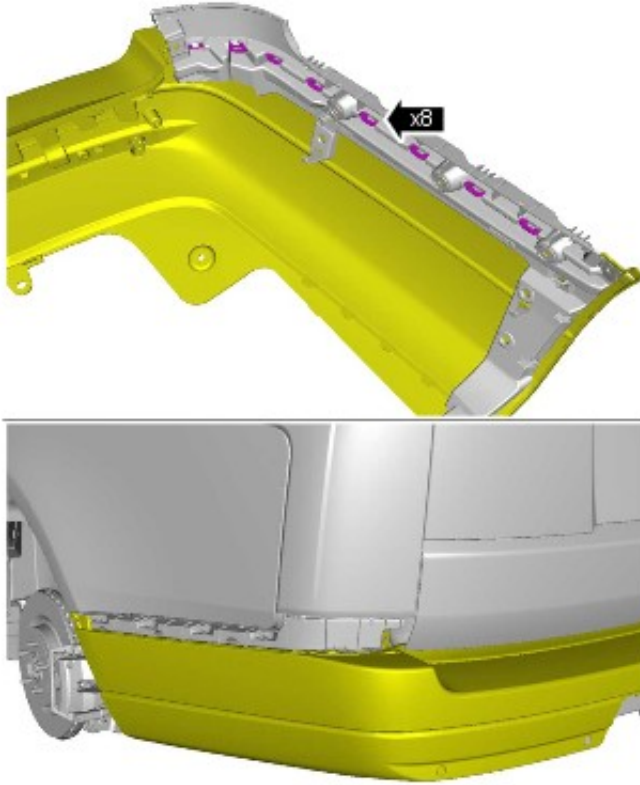

E146594


8.

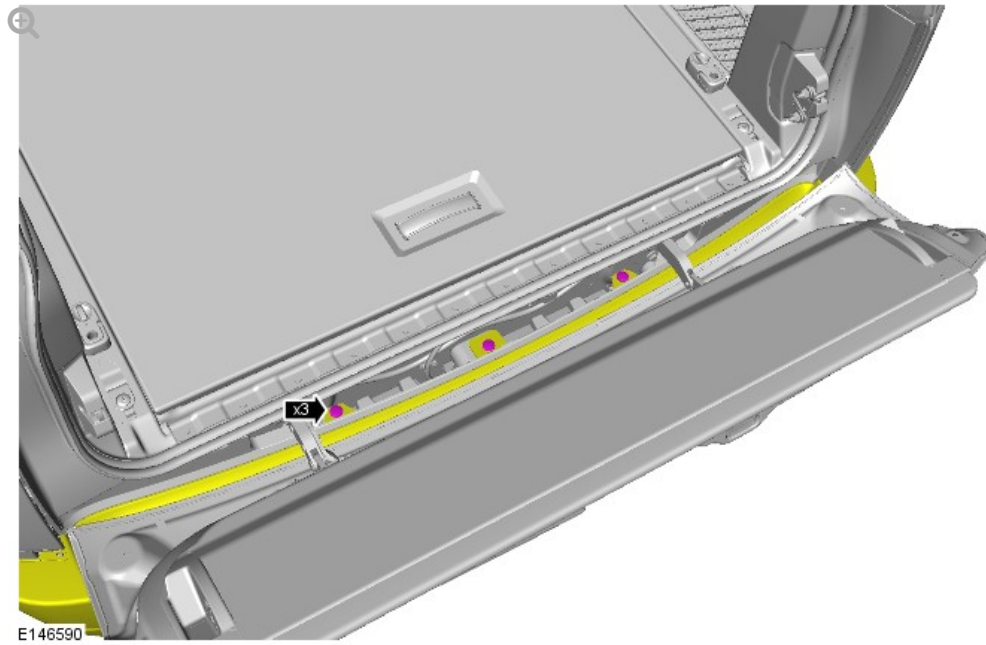


9.

NOTE:

Repeat the step for the other side.

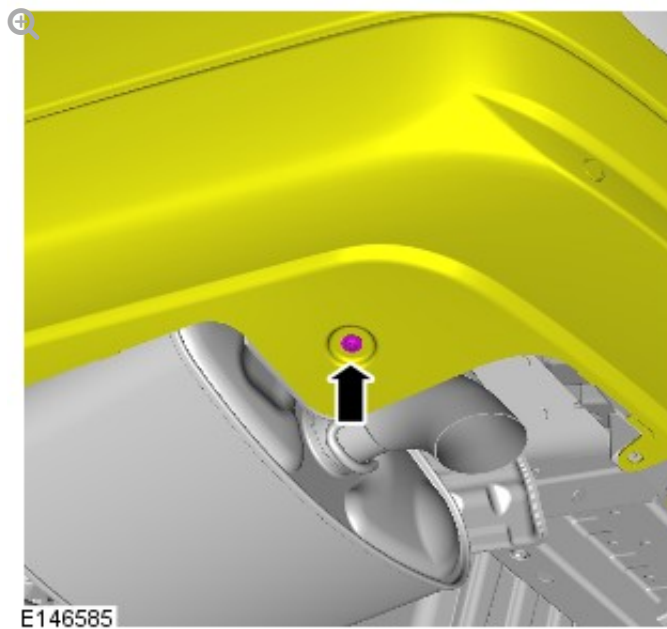

10.

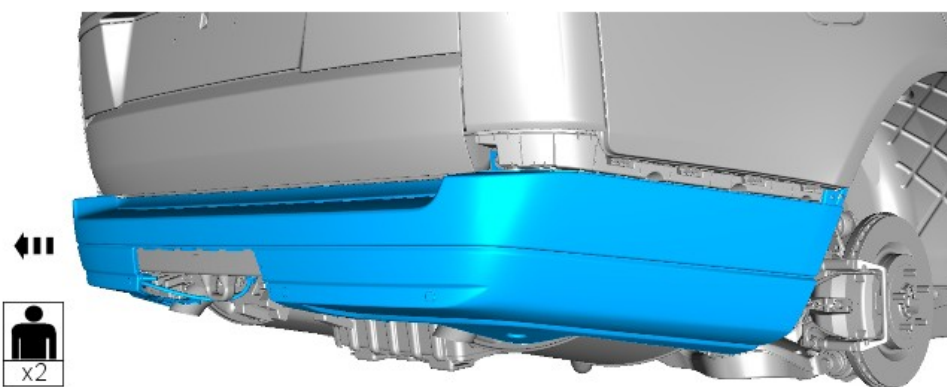


E146587

11.


NOTE:

Do not disassemble further if the component is removed for access only.

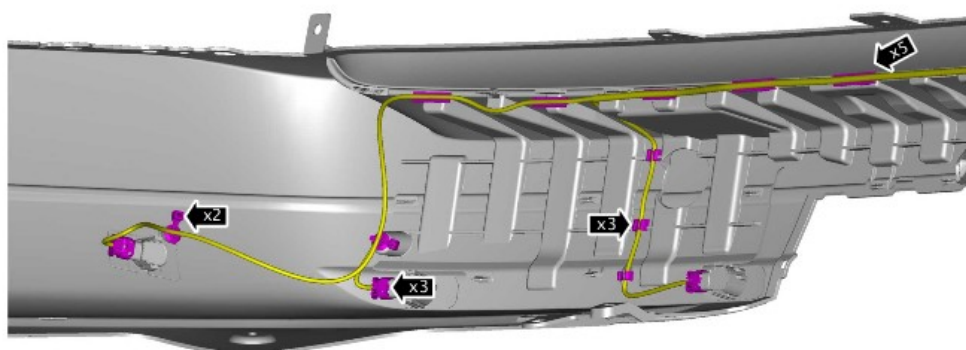


E156714

12.

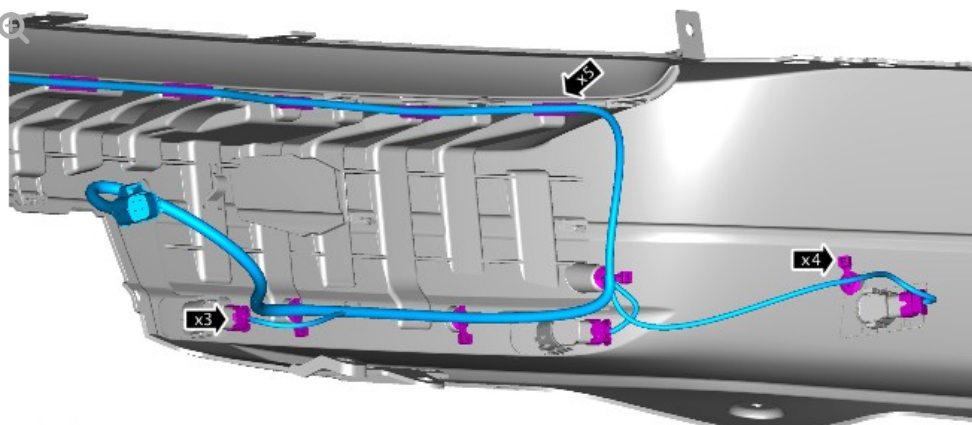

E156713

13.

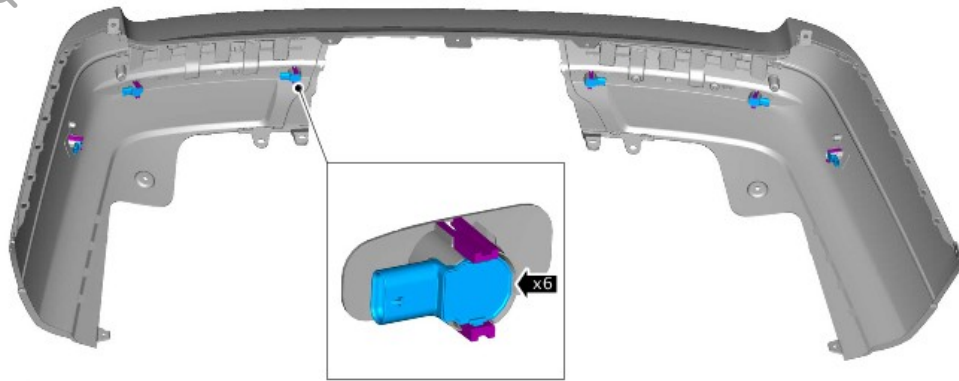


E156715

14.

NOTE:

SV Autobiography only.

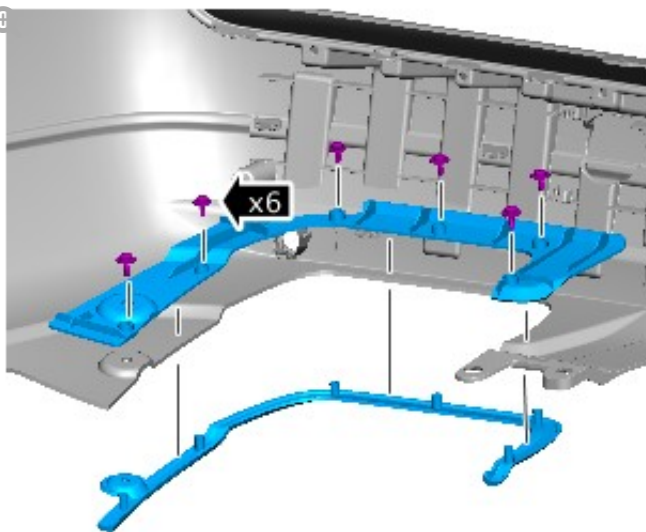


E181238

15.

NOTES:

- SV Autobiography only.
- Only carry out this step if a new bumper cover under rider trim is to be installed.

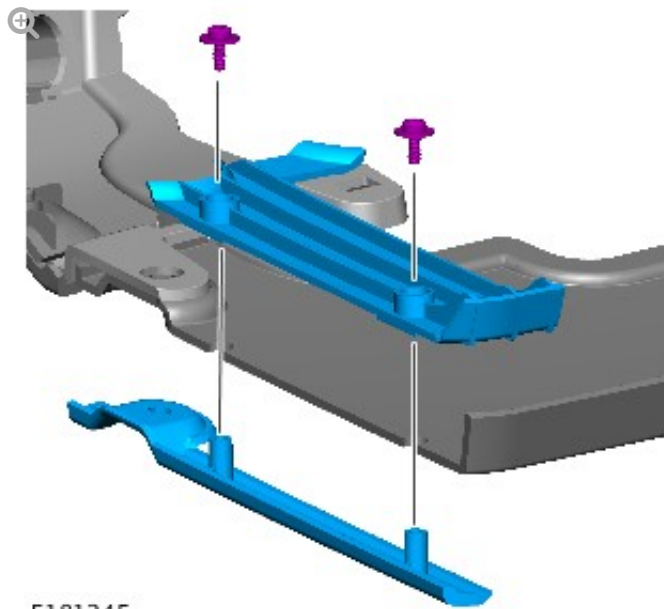

E181245

INSTALLATION




SV Autobiography only

NOTE:


The new bumper cover will require modifying to allow installation of exhaust pipe finishers. The following steps should be used as a guide to modifying the bumper cover and must be carried out on both sides of the bumper cover.

1.

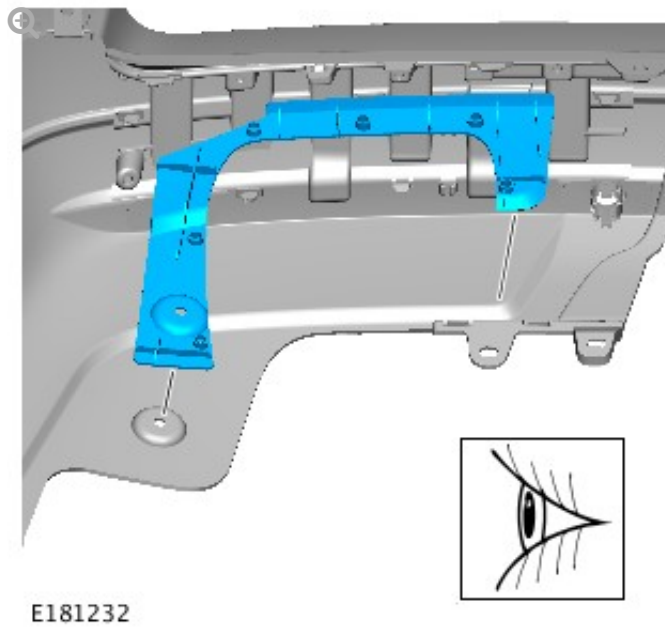


Place the exhaust recess trim retaining bracket inside the bumper cover making sure it is correctly aligned.

2.

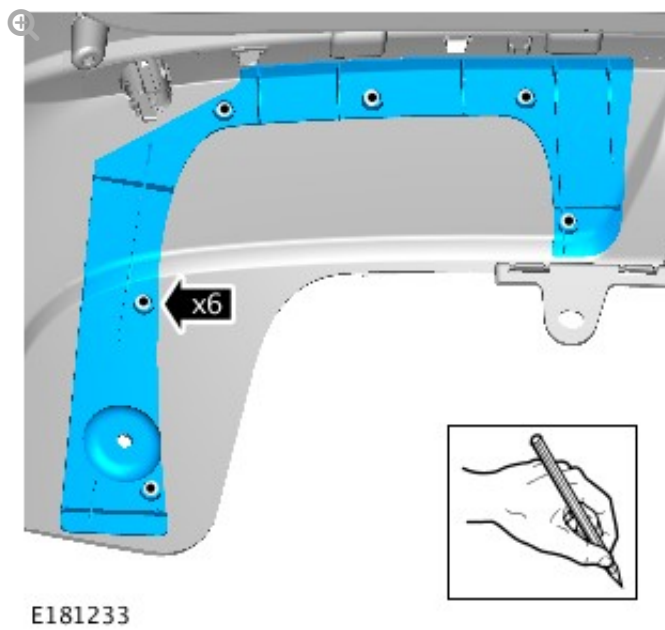

Using the retaining bracket as a guide, mark the position of the mounting holes.


3.

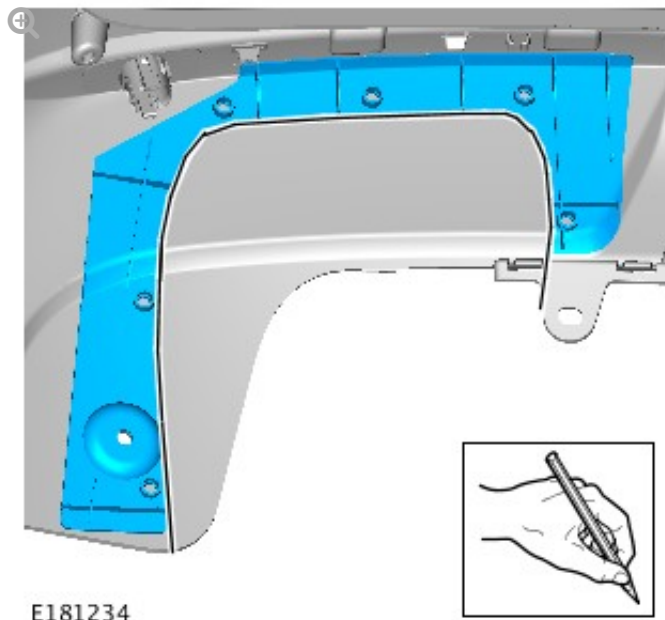

Using the retaining bracket as a guide, mark the outline of the exhaust recess.


4. Remove the retaining bracket.

5.

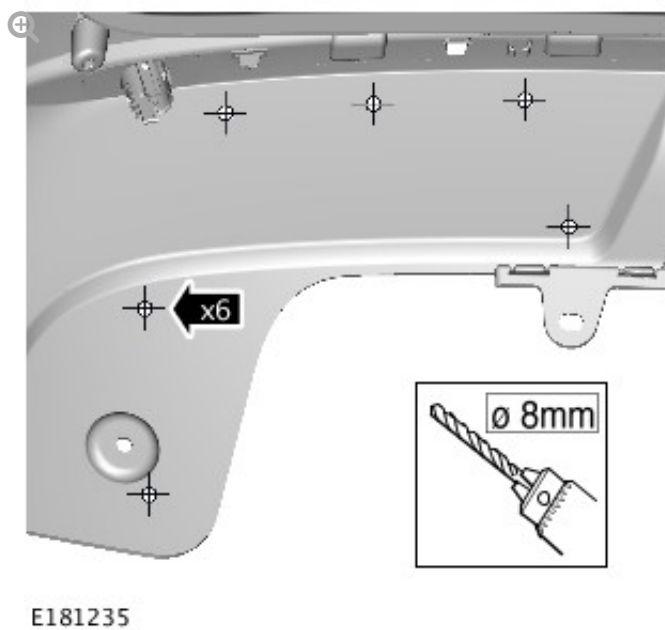

Drill the mounting holes.


6.

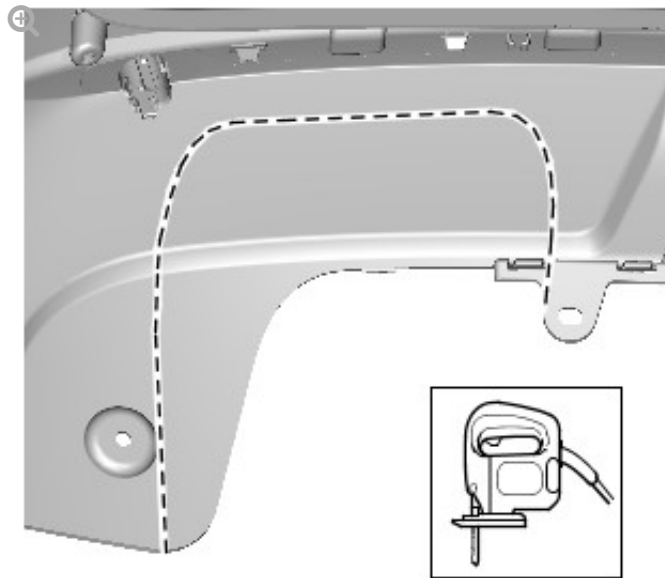

E181236

Cut the bumper cover along the marked outline.


7.

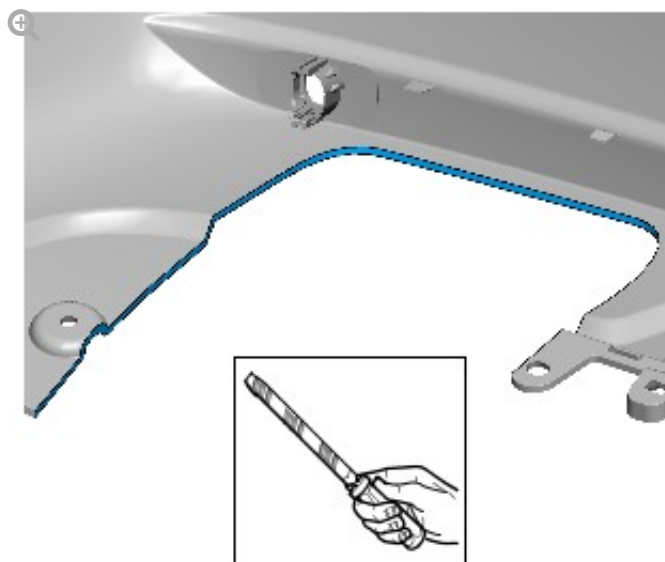

E181237

Remove any rough edges.

8.

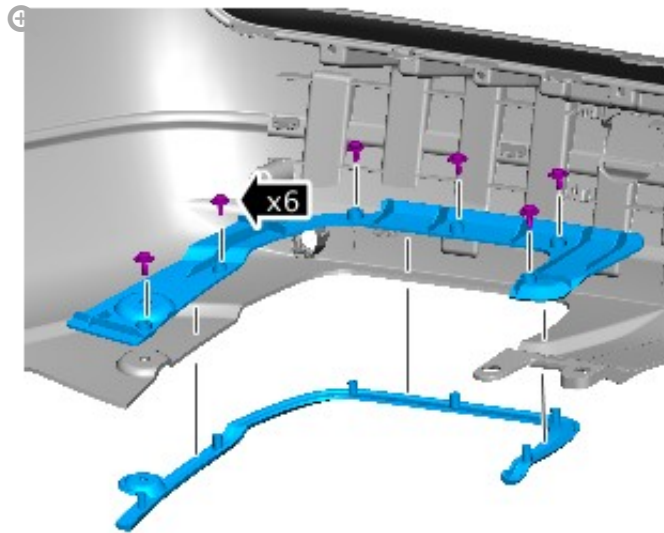


E181238

Install the bumper cover exhaust recess trim.

NOTE:

Only carry out the following steps if a new bumper cover under rider trim is to be installed.


9.

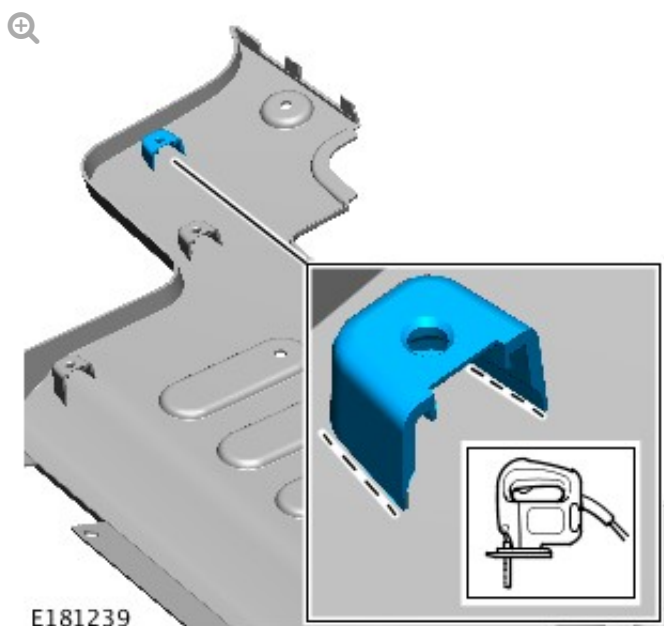

E181239


Remove the mounting lug from the bumper cover under rider trim.

10.

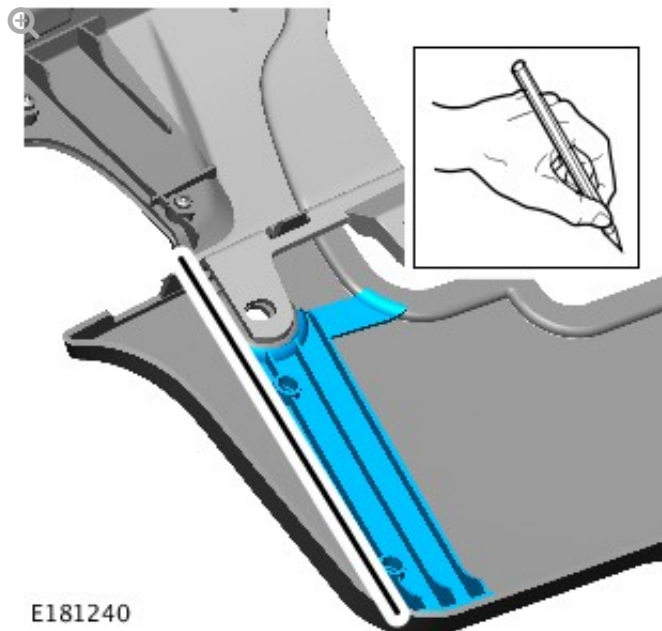

Using the retaining bracket as a guide, mark the outline of the exhaust recess.


11.

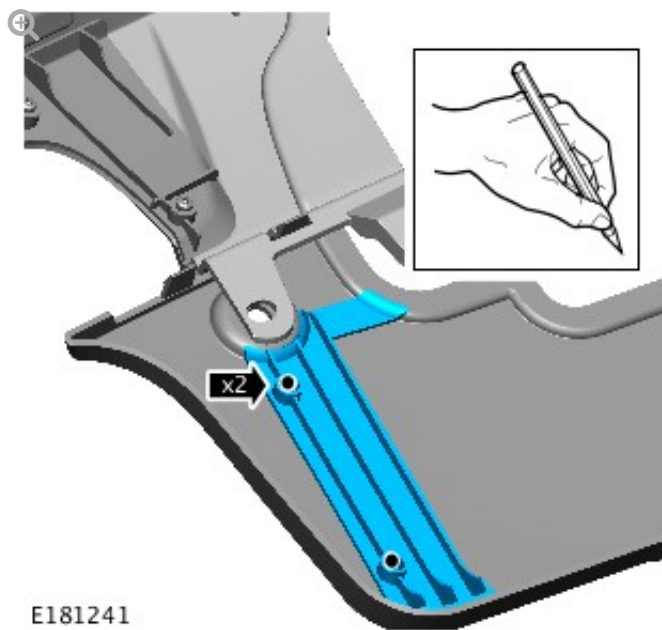

Using the retaining bracket as a guide, mark the position of the mounting holes.


12. Remove the retaining bracket.

13.

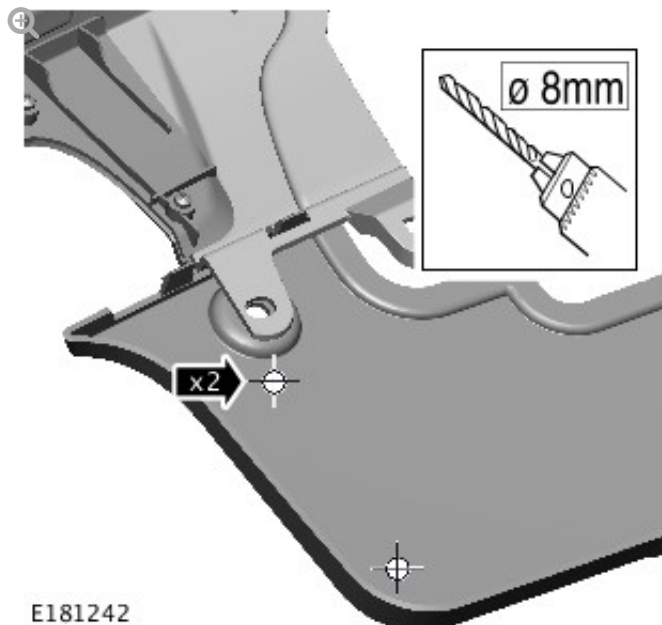


Drill the mounting holes.

14.

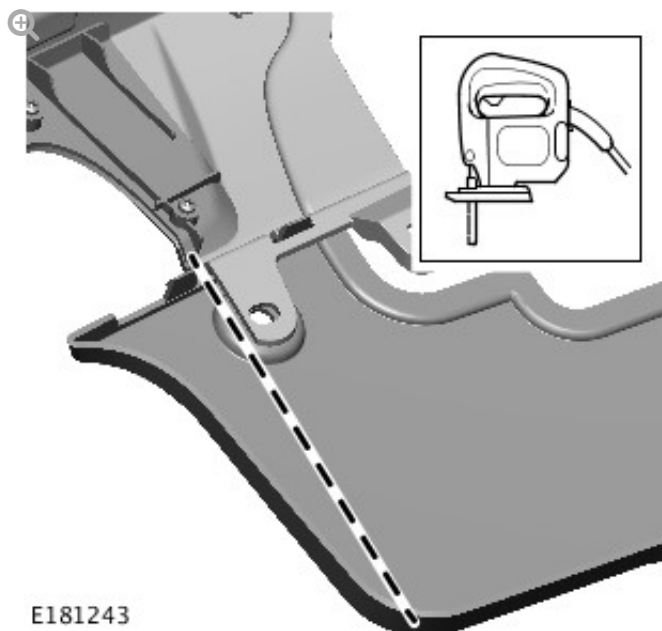

Cut the bumper cover under rider trim along the marked outline.


15.

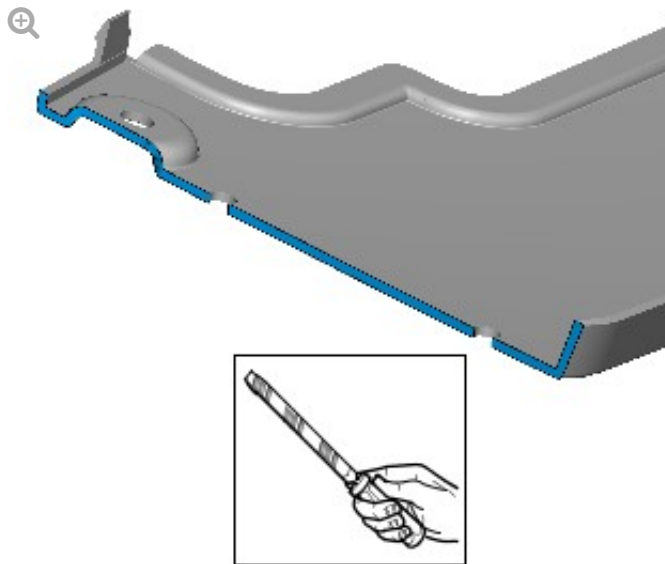

E181244

Remove any rough edges.

16.

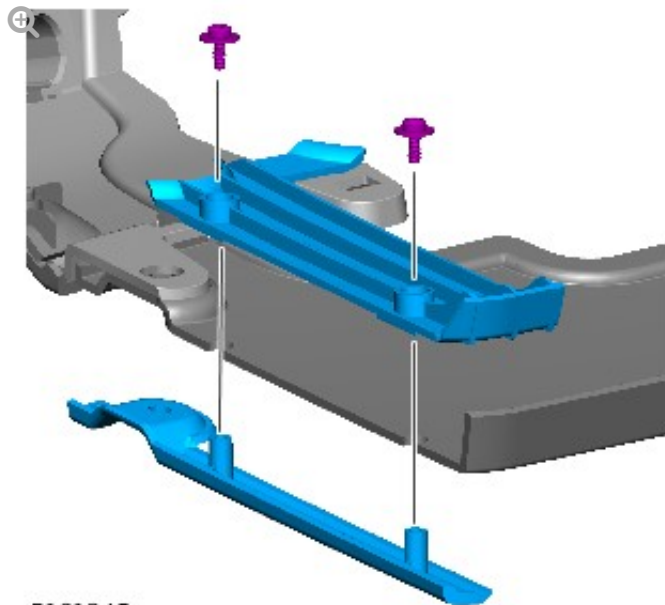

E181245

Install the bumper cover exhaust recess trim.

NOTE:

Only carry out the following steps if a new bumper cover under rider trim is to be installed.



All vehicles

17. To install, reverse the removal procedure.