

2016.0 RANGE ROVER (LG), 501-08

EXTERIOR TRIM AND ORNAMENTATION

REAR SPOILER (G1514973)

REMOVAL AND INSTALLATION

REMOVAL


CAUTION:

Protect the paintwork during this operation.


1.



2.

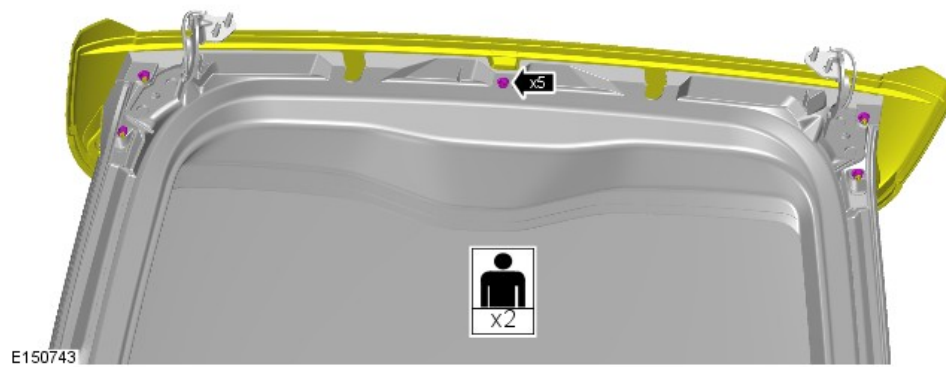


3.

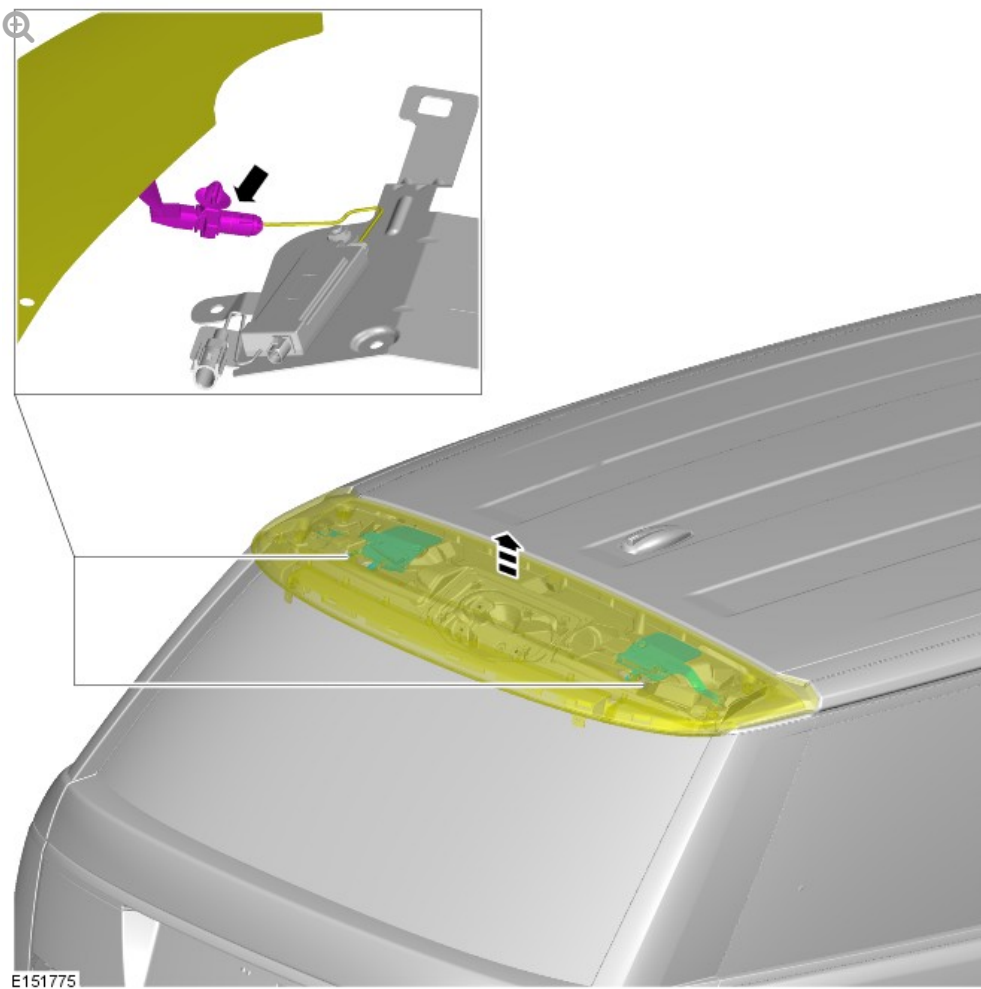

4.

CAUTION:



Make sure that all openings are sealed. Use new blanking caps.

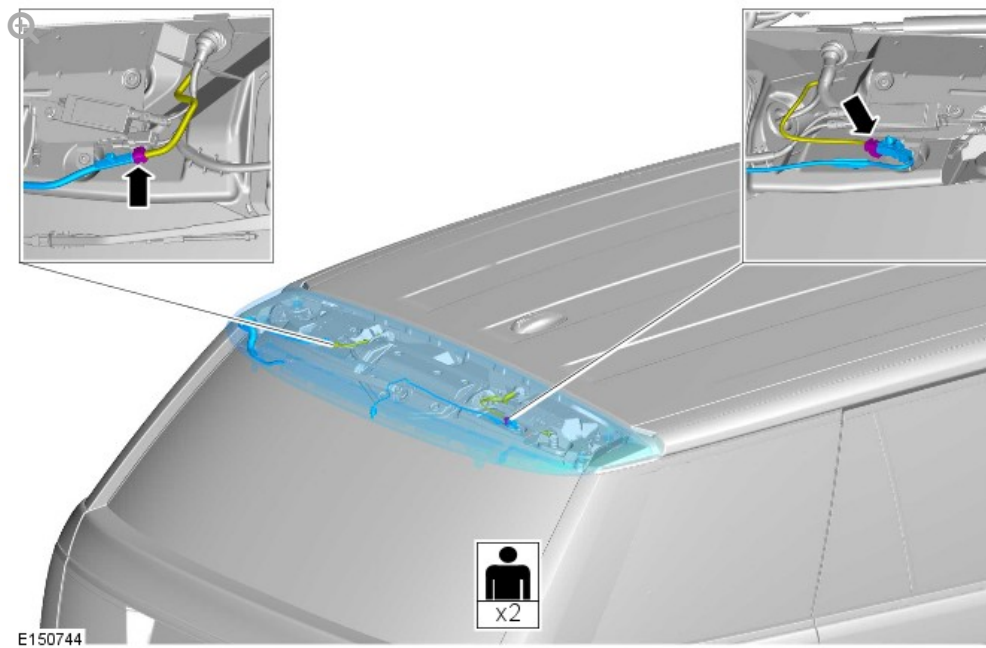

5.


NOTE:

Do not disassemble further if the component is removed for access only.

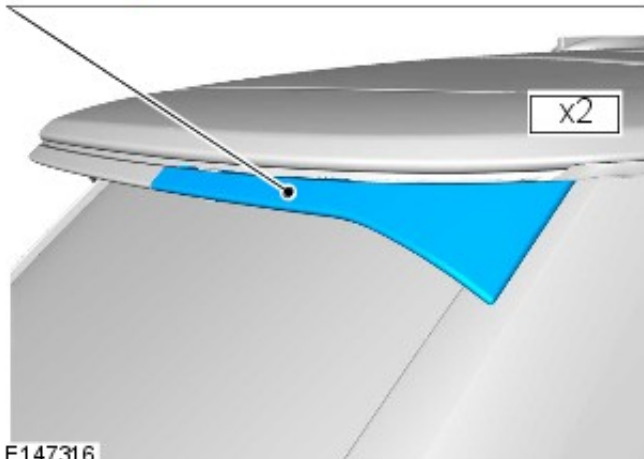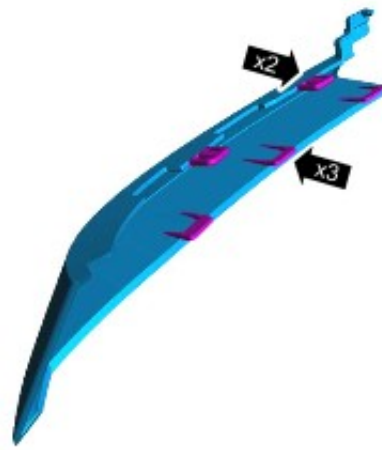


E147316

6.

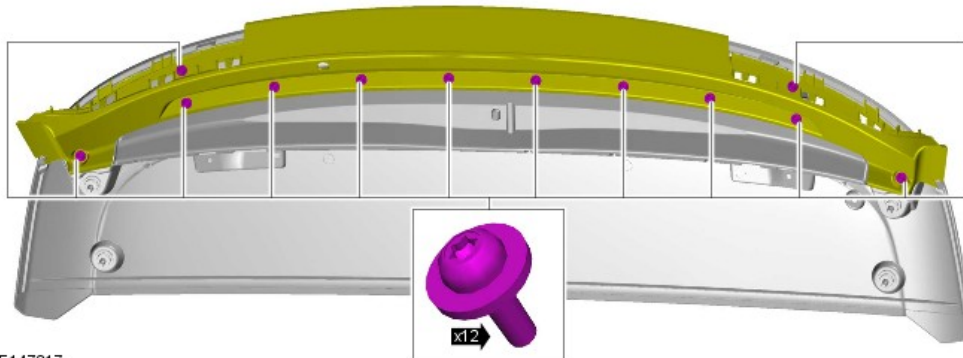


E147317

7.

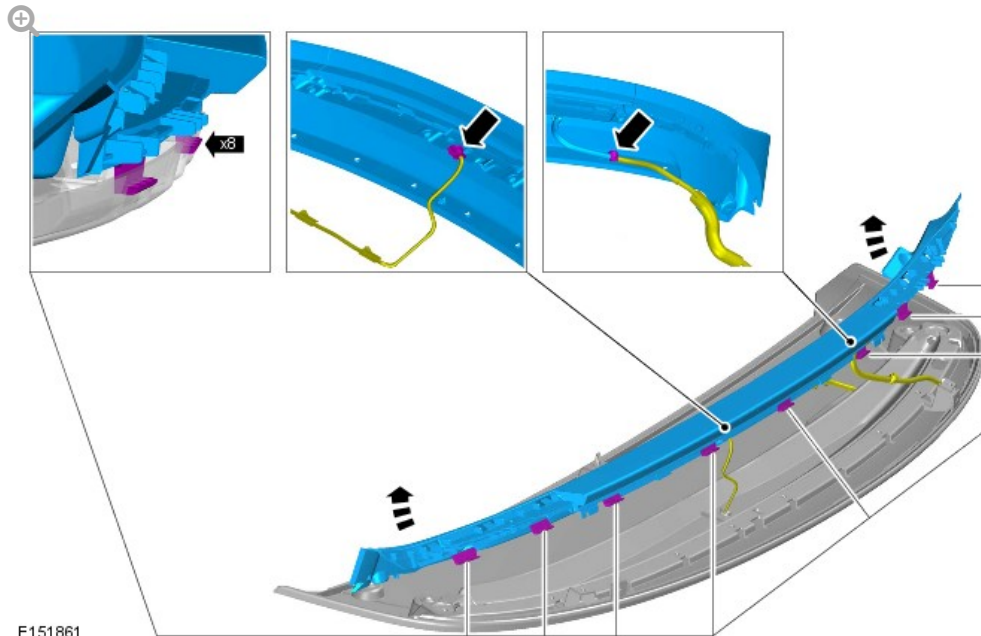


8.

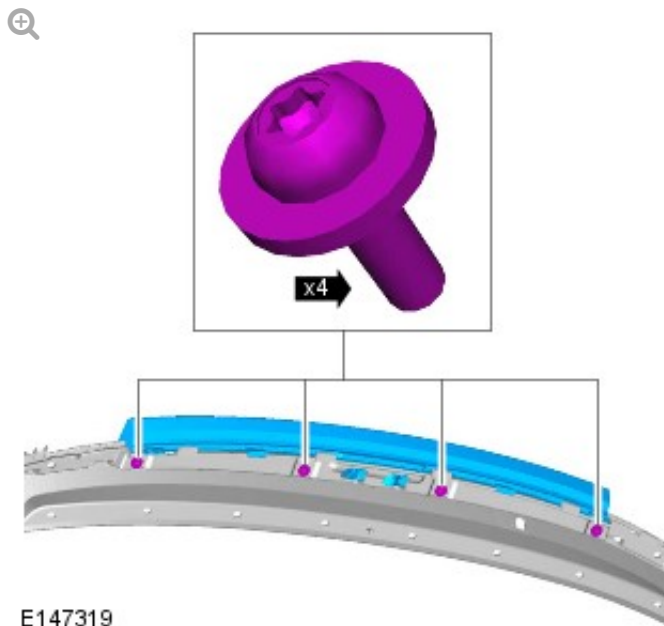

INSTALLATION


1.

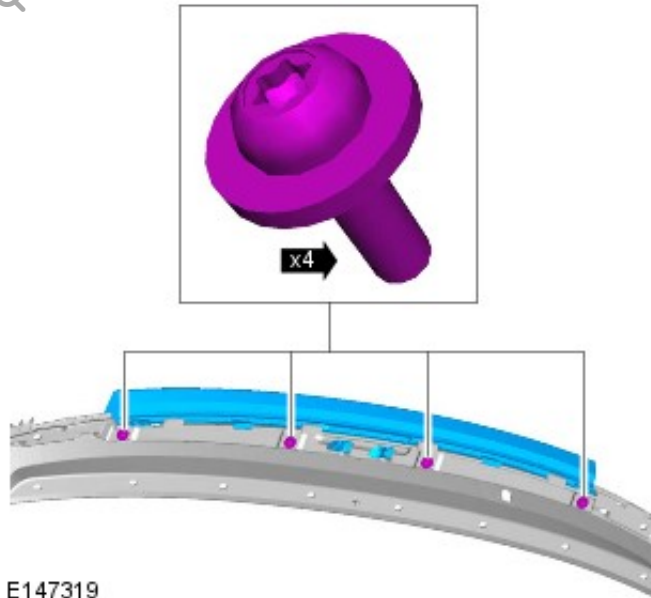

E147319


Torque: 2.5 Nm

2.

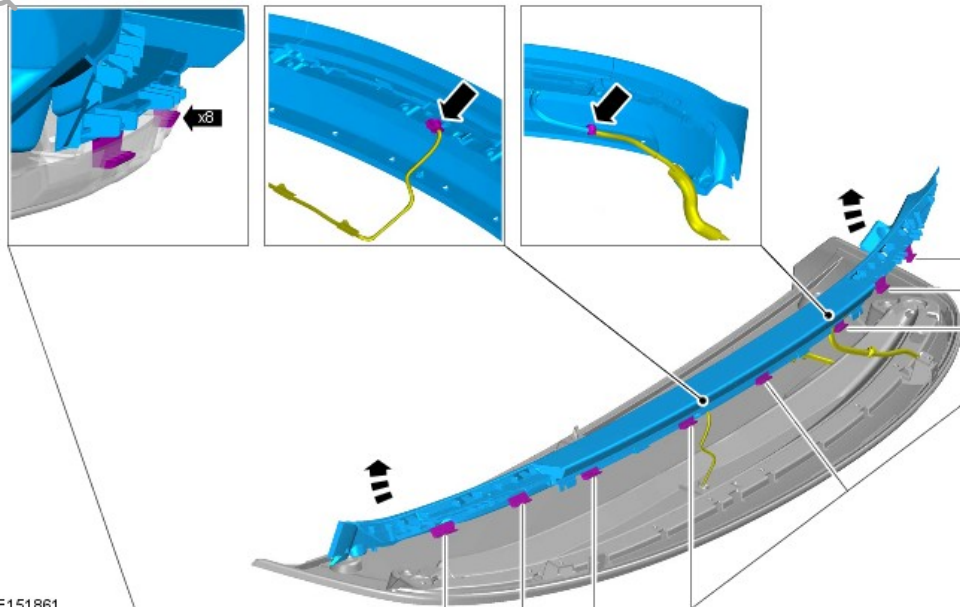


E151861

3.

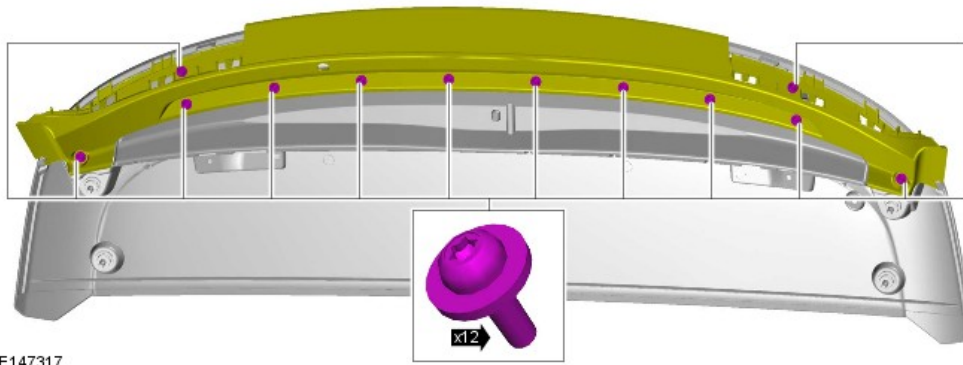

Torque: 3 Nm


4.

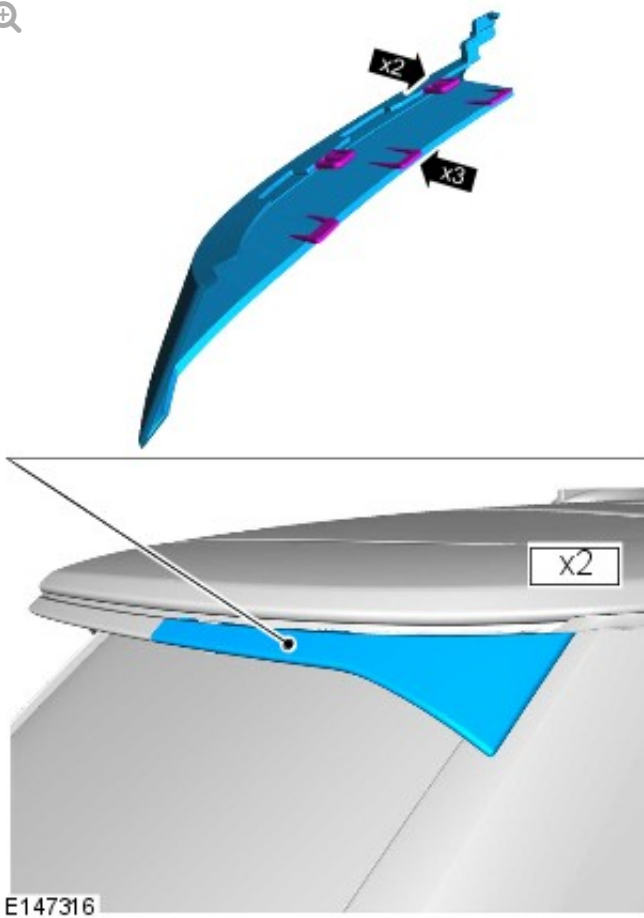


5.

NOTE:

Remove and discard all blanking caps.

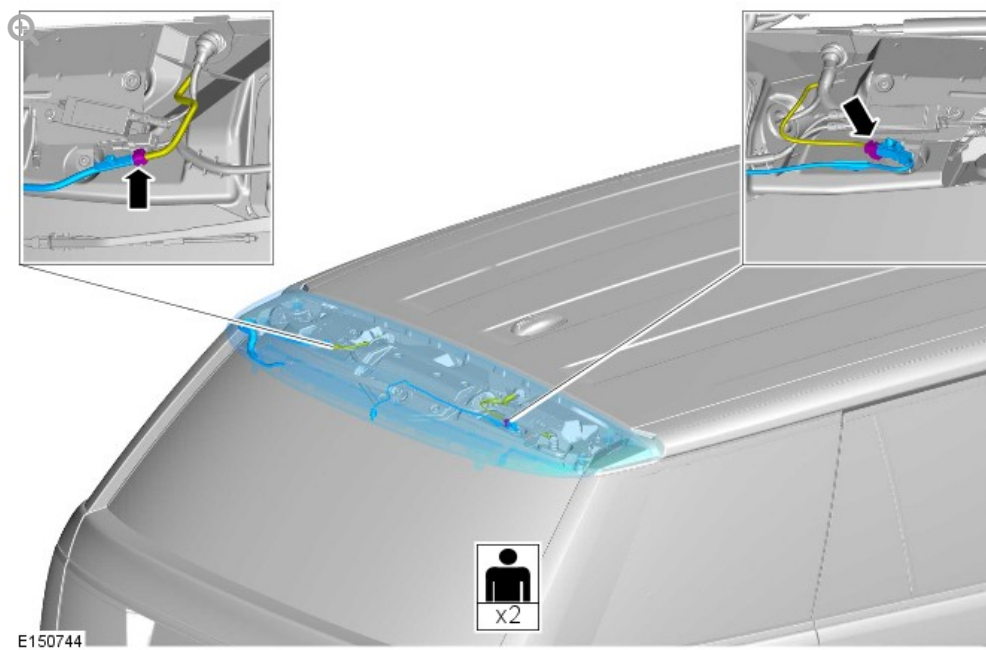


6.

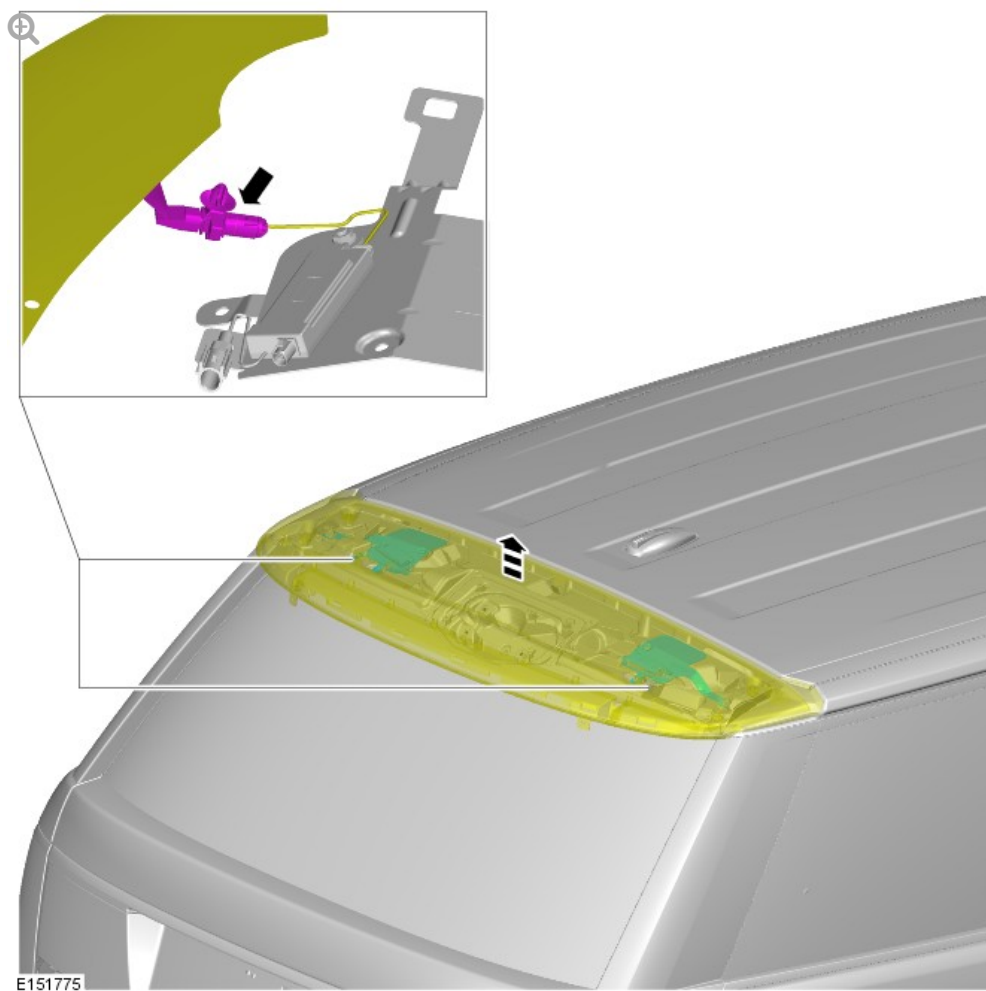

7.

CAUTION:


Only tighten the nuts finger-tight at this stage.

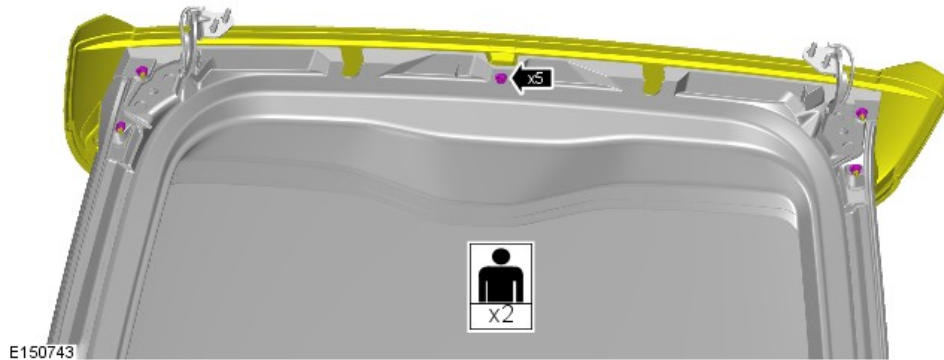


8.

CAUTION:

Make sure that the gap is even between the rear spoiler and the rear quarter panel finisher and the rear spoiler is flush with the roof panel.

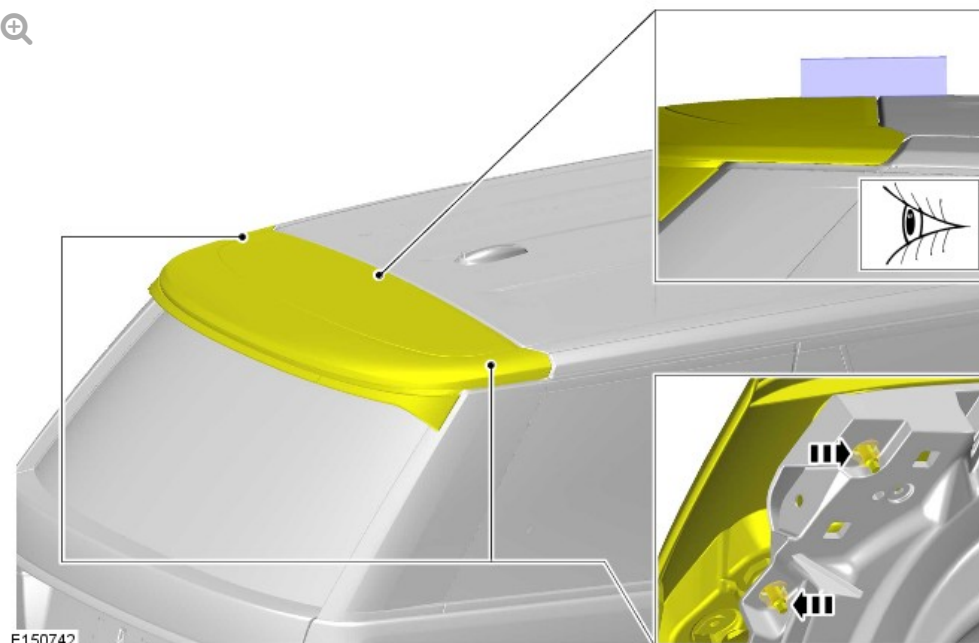


9.

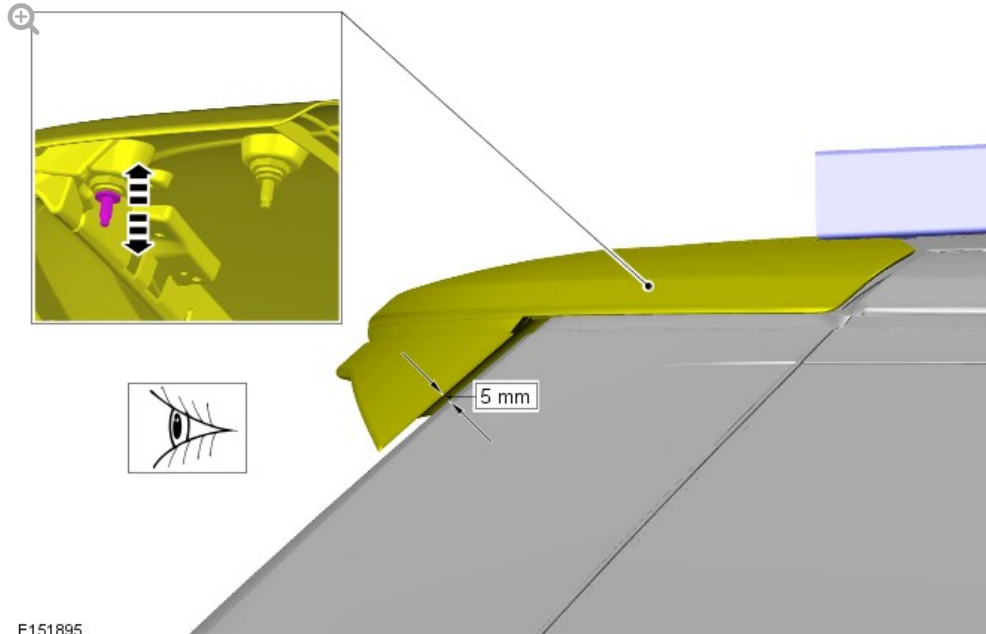


E151895

10.

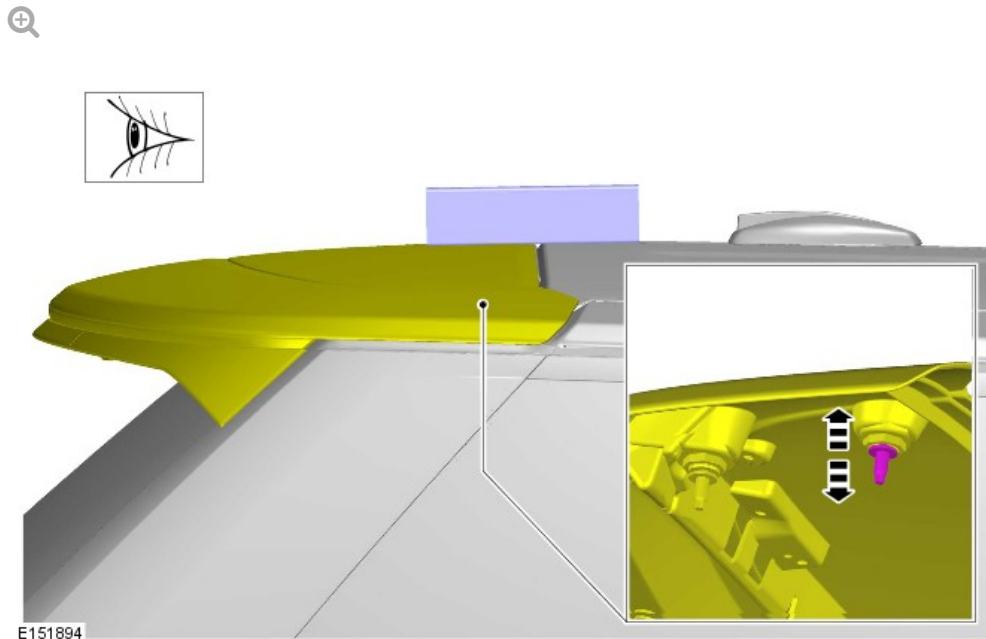

E151894

11.

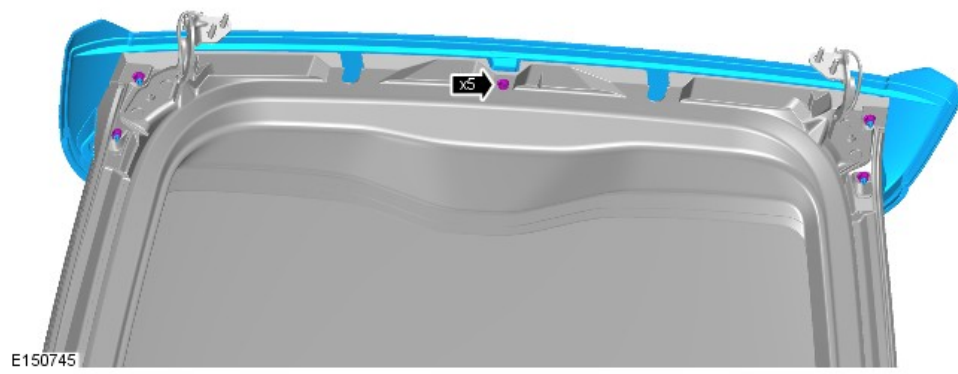

Torque: 7 Nm

12.

