

2016.0 RANGE ROVER (LG), 501-14

HANDLES, LOCKS, LATCHES AND ENTRY SYSTEMS

LIFTGATE STRIKER ADJUSTMENT (G1781046)

GENERAL PROCEDURES

CHECK

NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.

1. Close the liftgate and check for an equal gap and alignment to the adjacent panels.

ADJUSTMENT




All vehicles

2. Refer to: Tailgate Moulding (501-08 Exterior Trim and Ornamentation, Removal and Installation).




Vehicles with power tailgate

3.

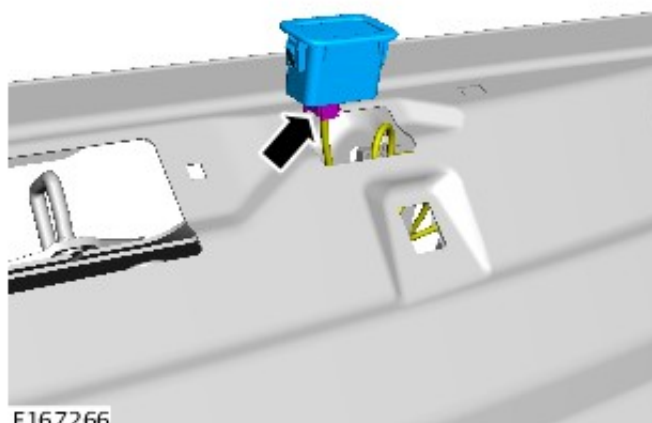


E167266

4.

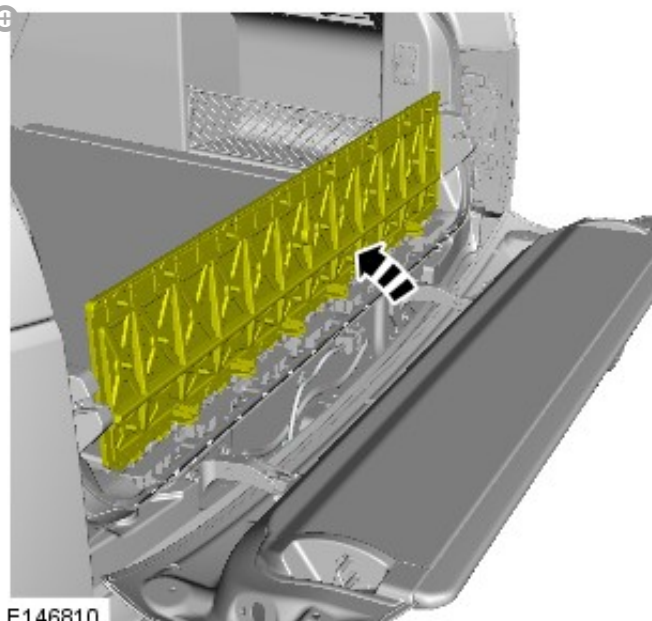


E146810

5.

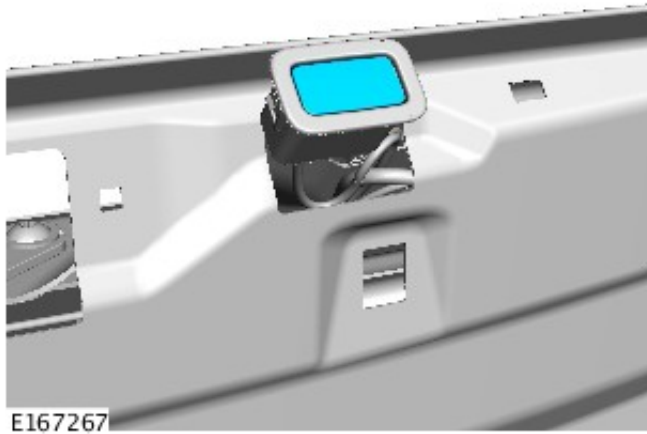

Close the tailgate

6.

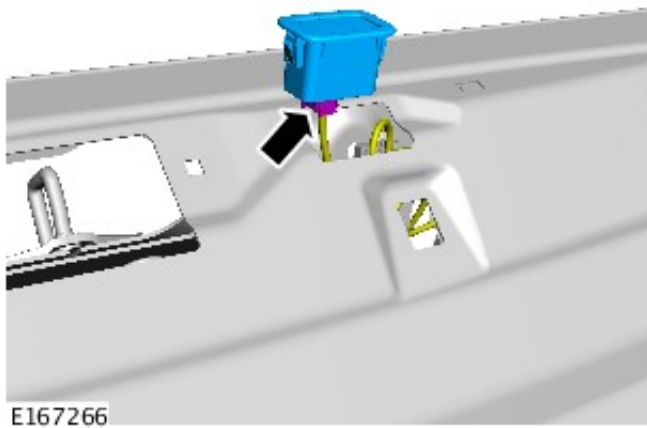

Vehicles without power tailgate


7.

Close the tailgate



All vehicles


8.

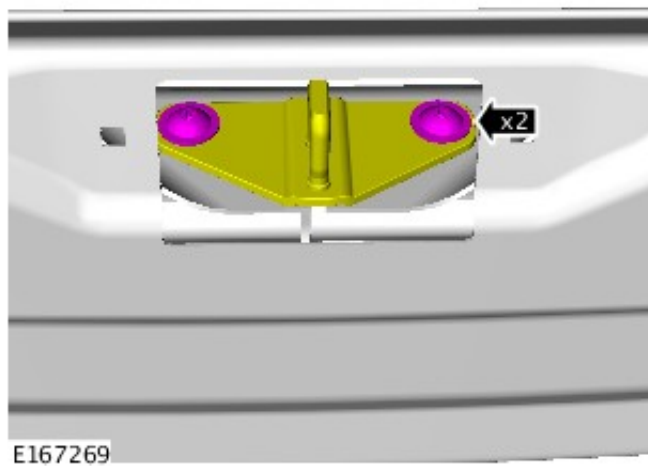

Loosen the 2 screws securing the liftgate striker.

9. Close the liftgate and check for an equal gap and alignment to the adjacent panels.
10. Open the liftgate.

11.

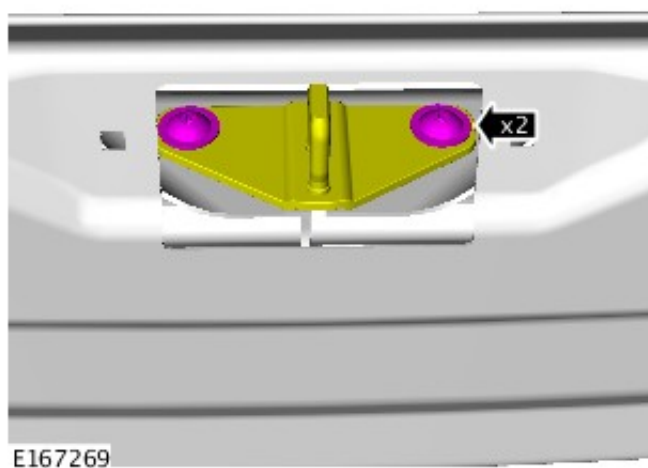

Torque:

Striker plate bolts **25 Nm**

12. Refer to: Tailgate Moulding (501-08 Exterior Trim and Ornamentation, Removal and Installation).