

2016.0 RANGE ROVER (LG), 501-12

INSTRUMENT PANEL AND CONSOLE - LONG WHEEL BASE

IN-VEHICLE CROSSBEAM

[G1551604]

REMOVAL AND INSTALLATION

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.



All vehicles

1.

WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2. Make the SRS system safe.


Refer to: Standard Workshop Practices (100-00 General Information, Description and Operation).

3. Refer to: Heater Core and Evaporator Core Housing (412-01A,

Removal and Installation).


Refer to: Heater Core and Evaporator Core Housing (412-01B,
Removal and Installation).

4.

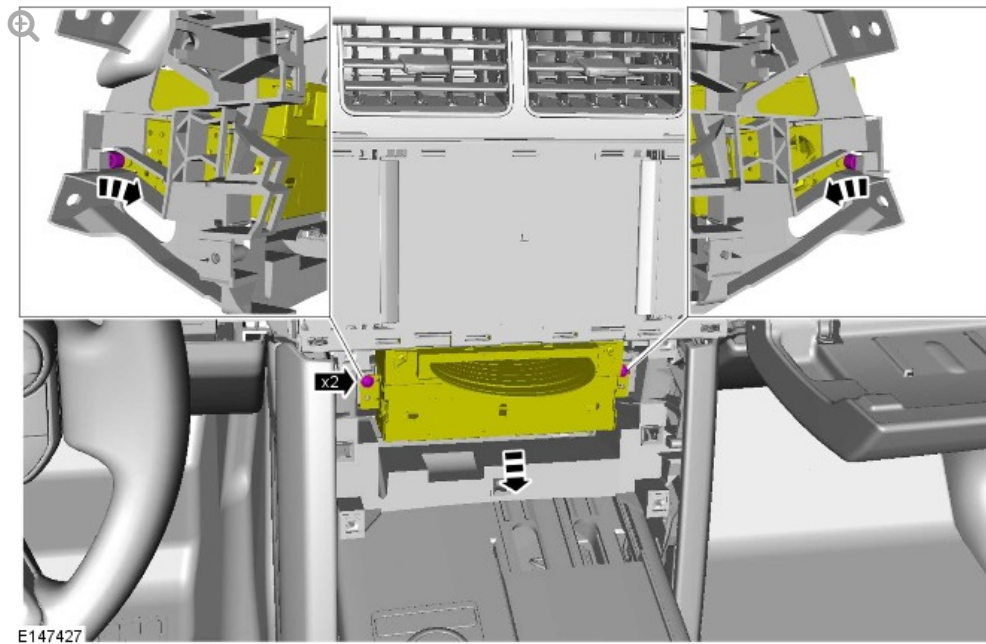


Torque: 2.2 Nm

5.

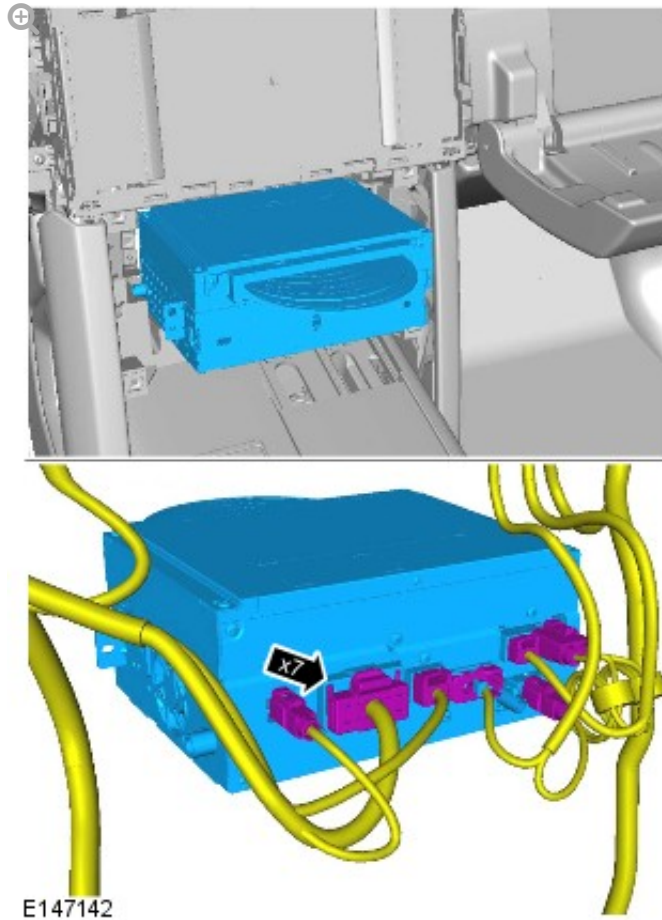



E147142

6.


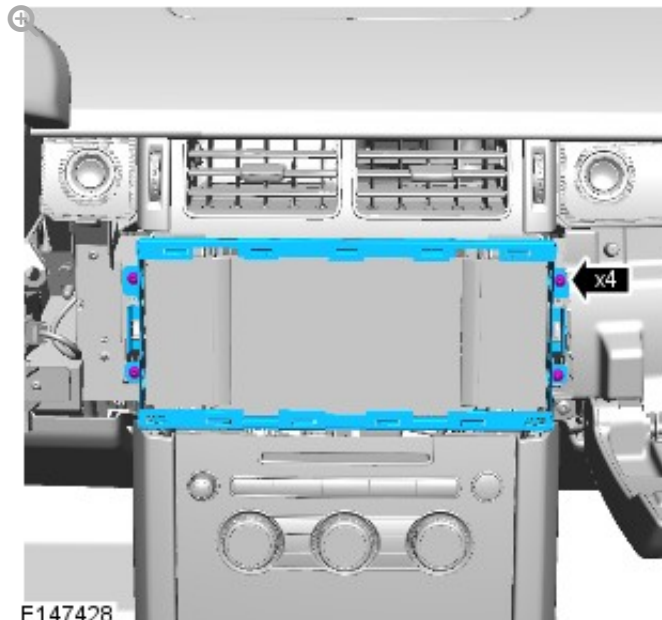


E147428

7.

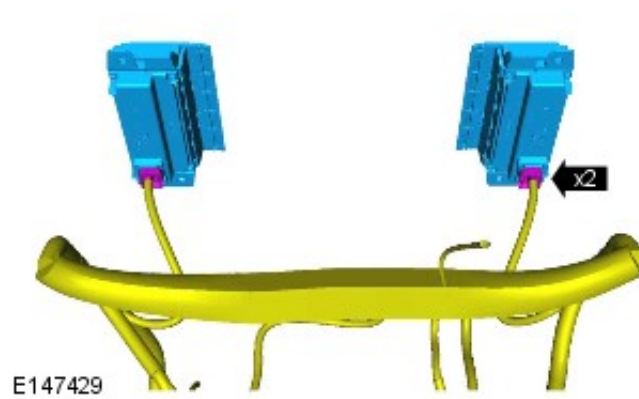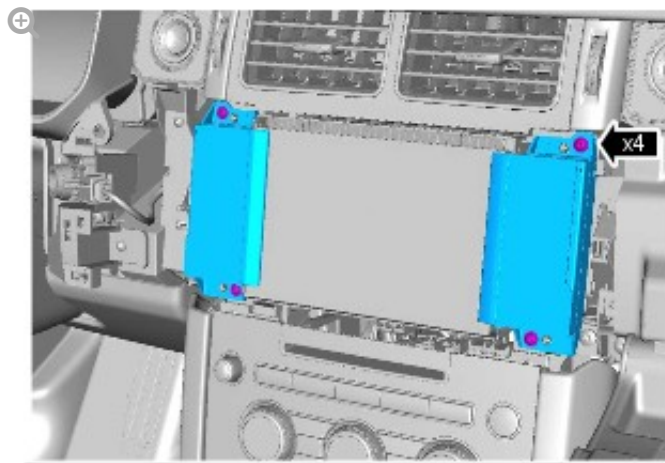


8.

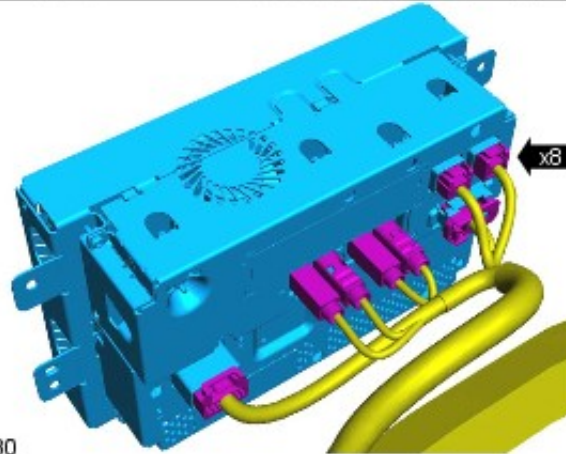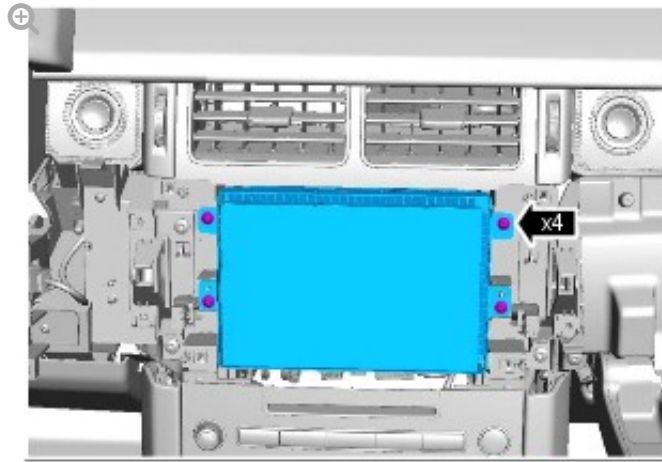


E147430

9.

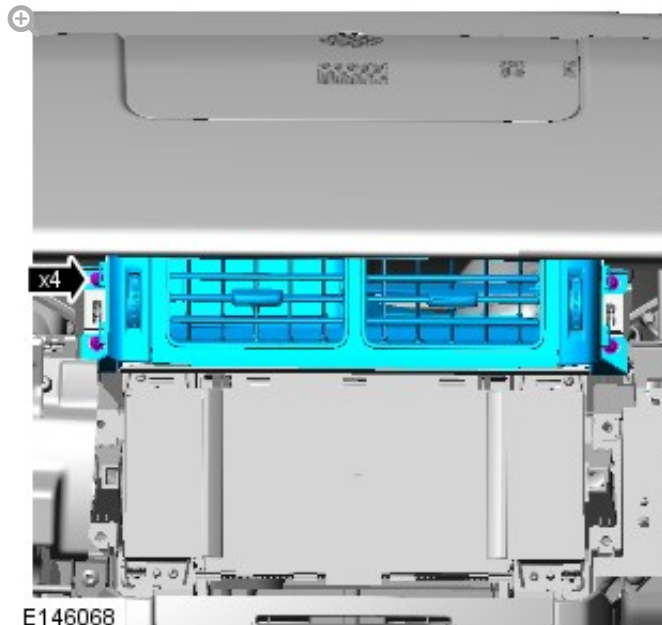


E146068


10.

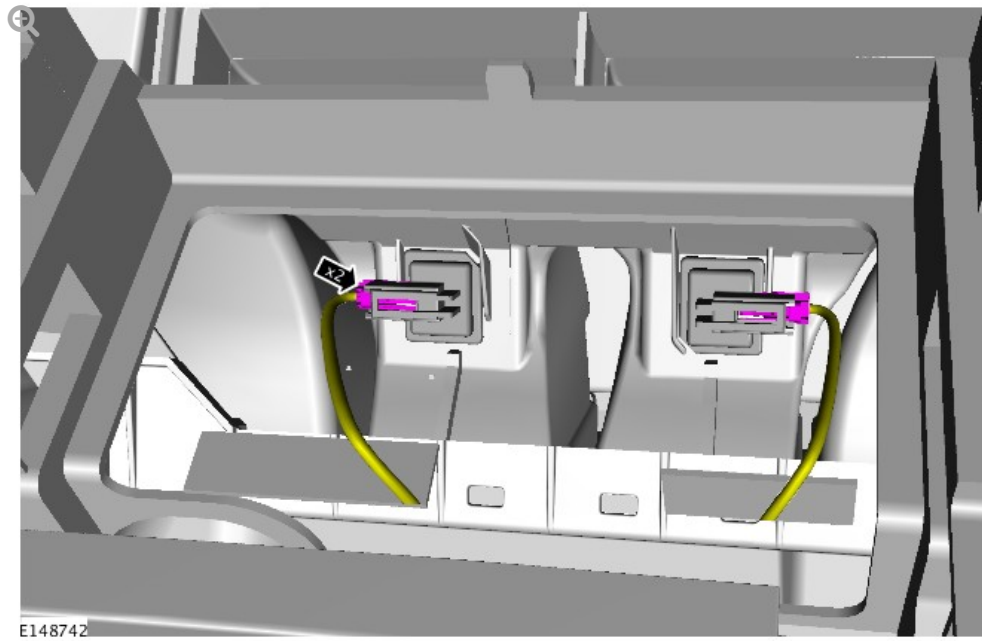


11.

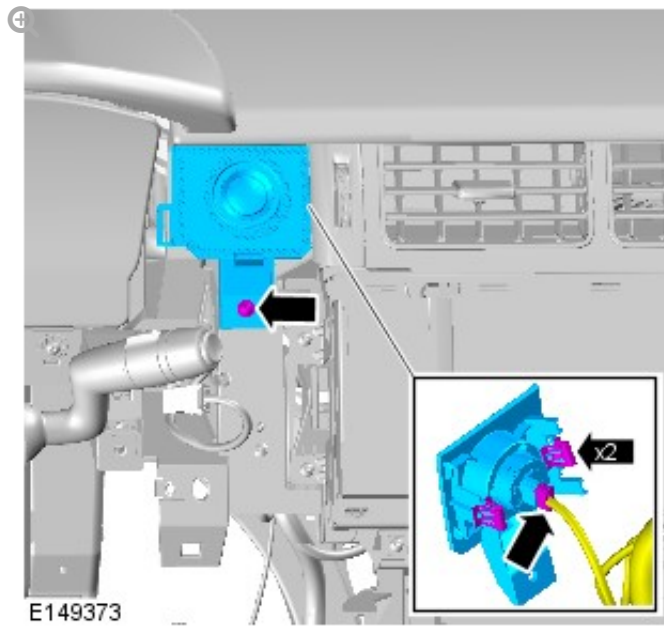


12.

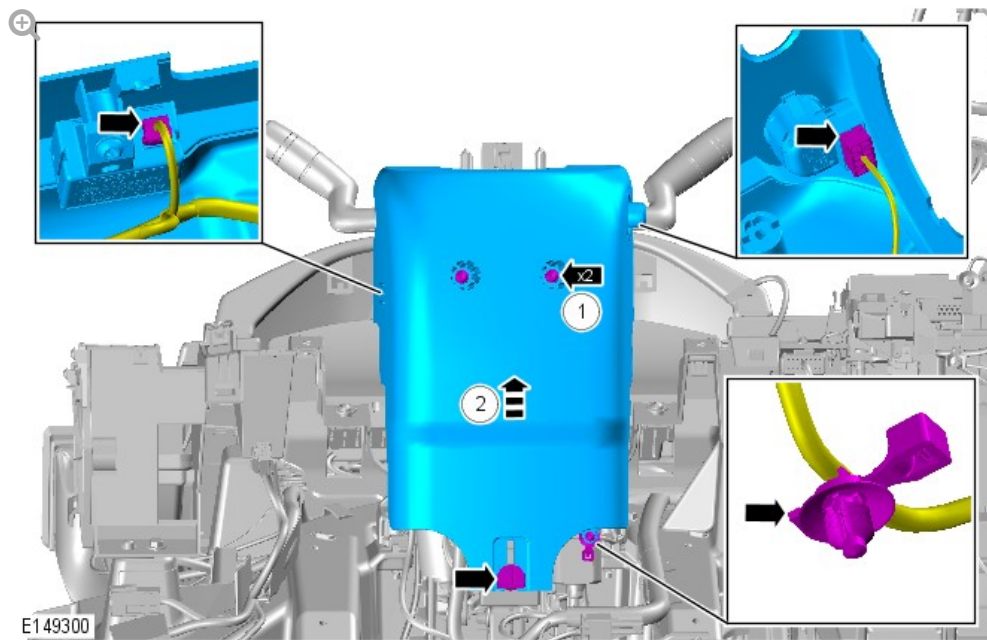

13.

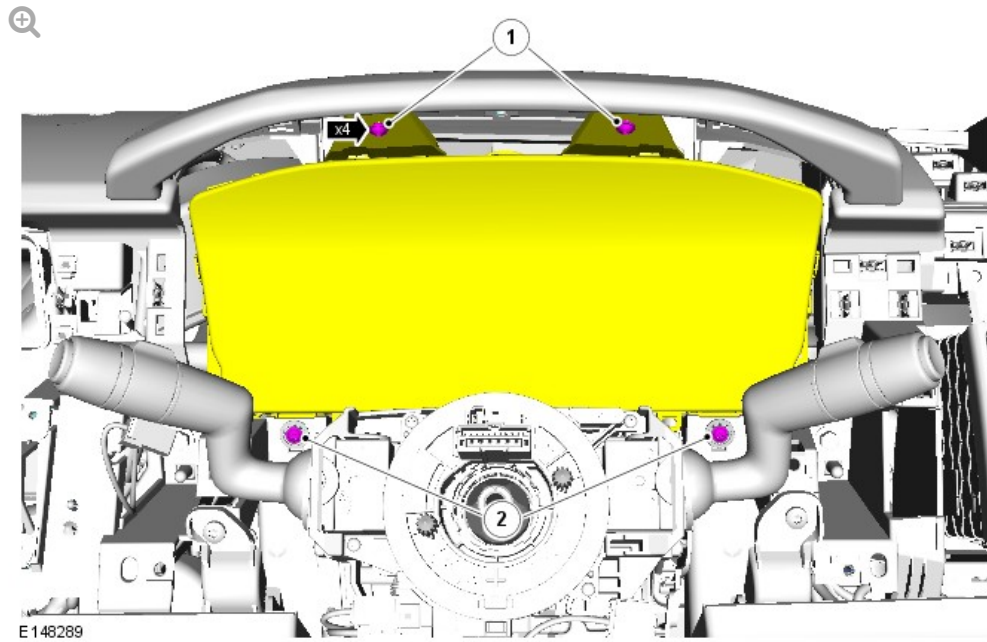

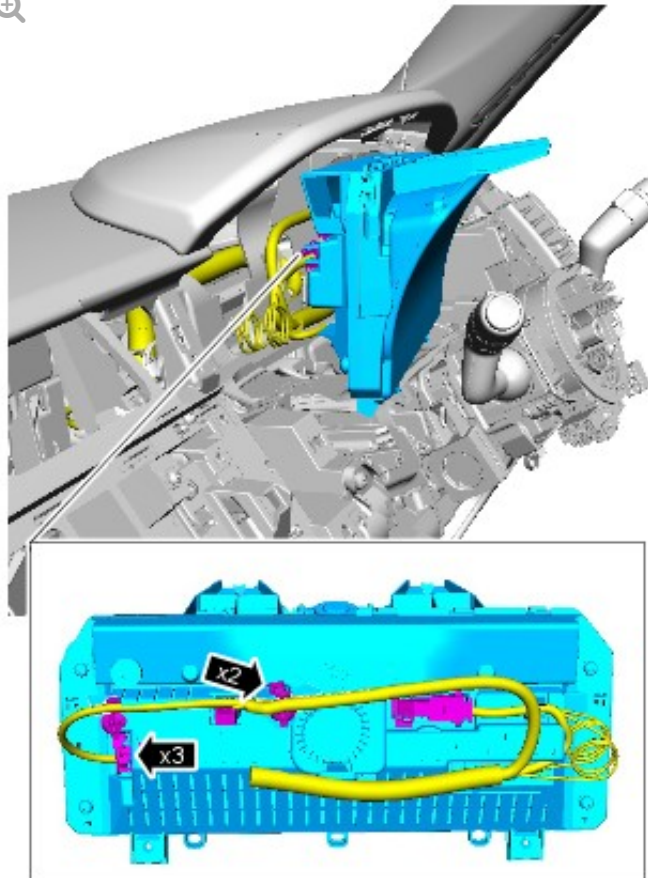


E148290

15.



16.

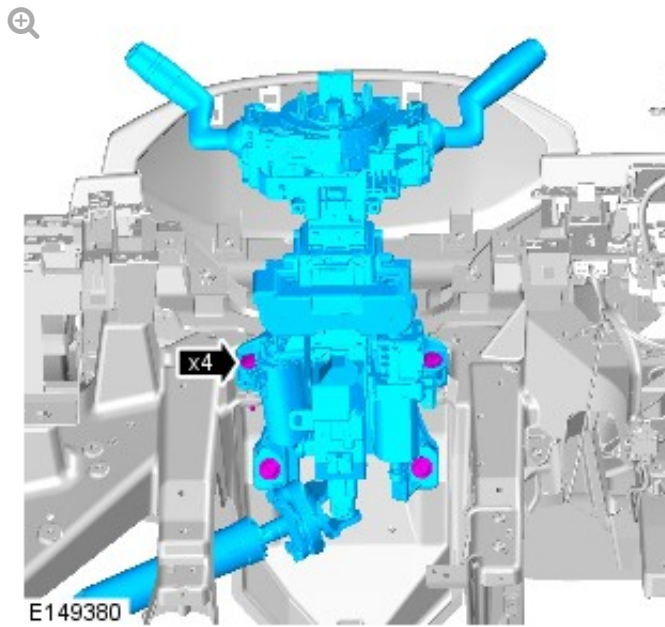


Torque: 25 Nm

17.

CAUTION:

Install all the bolts finger tight before final tightening.

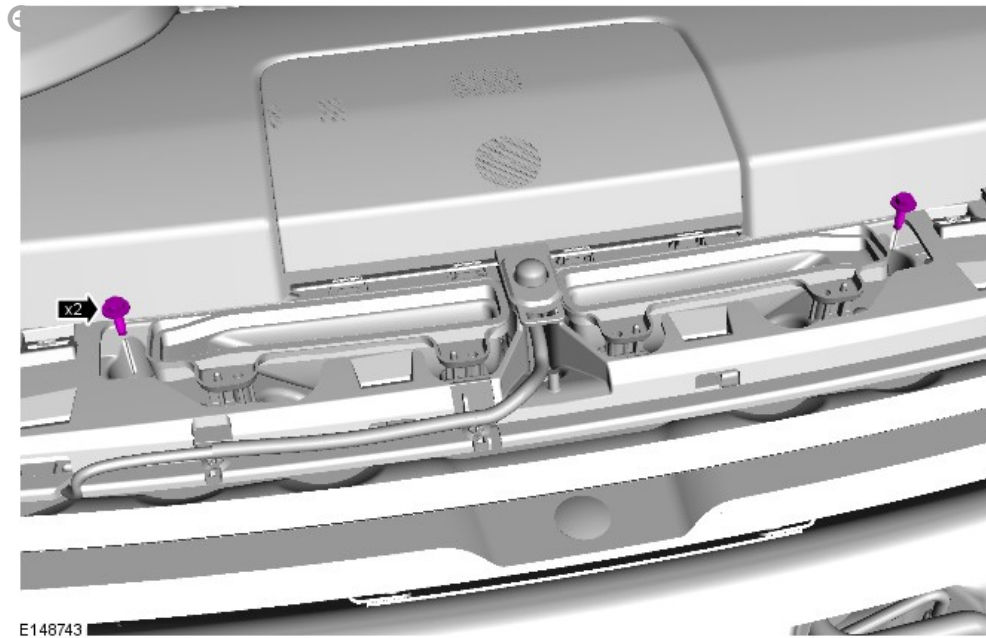


Torque: 9 Nm

18.

NOTE:

Install the bolt finger tight before final tightening.

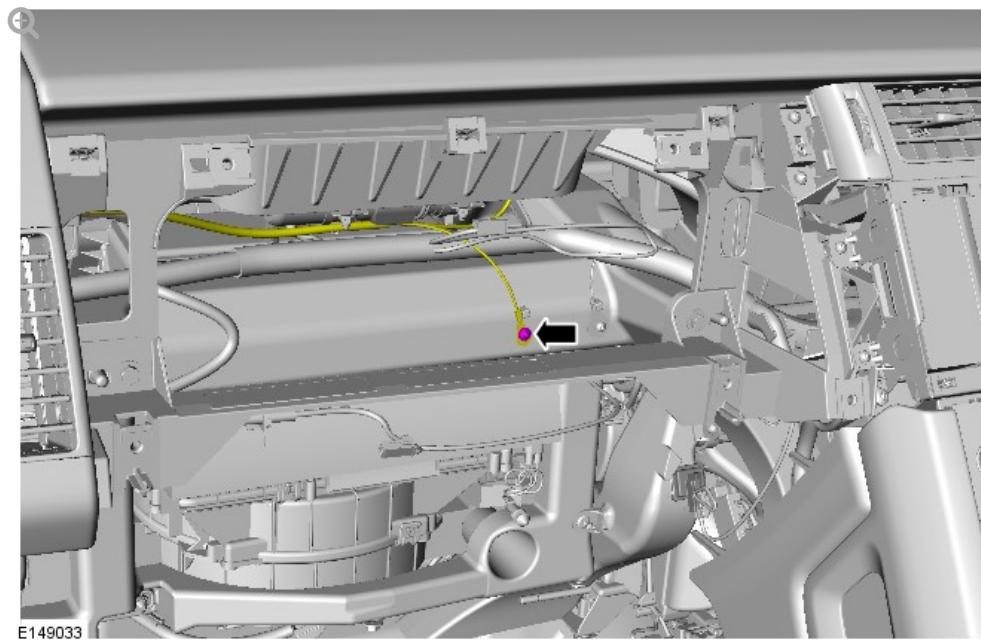


Torque: 12 Nm

19.


CAUTION:

Install all the bolts finger tight before final tightening.

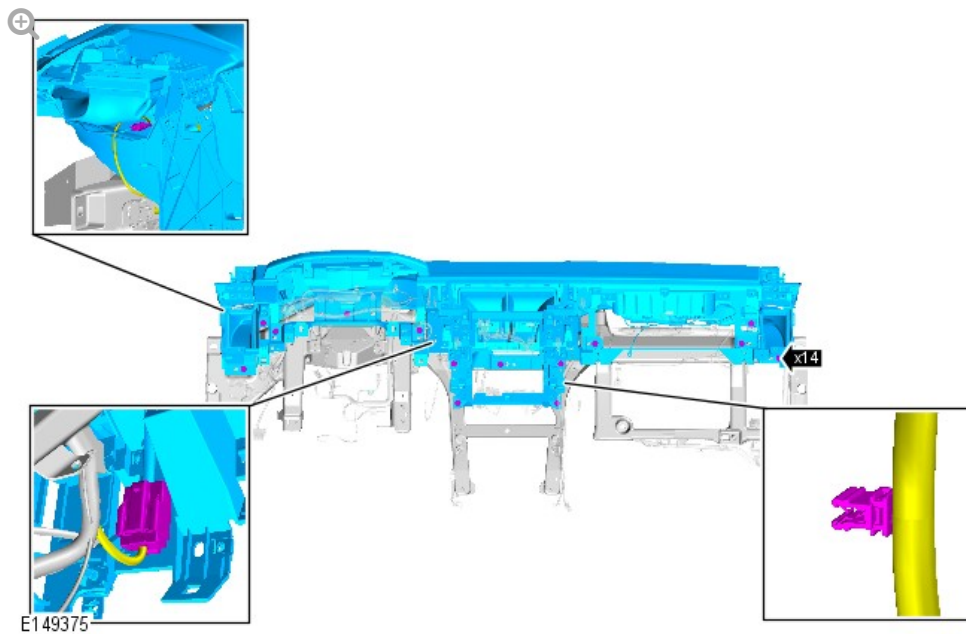

Torque: 9 Nm


20.

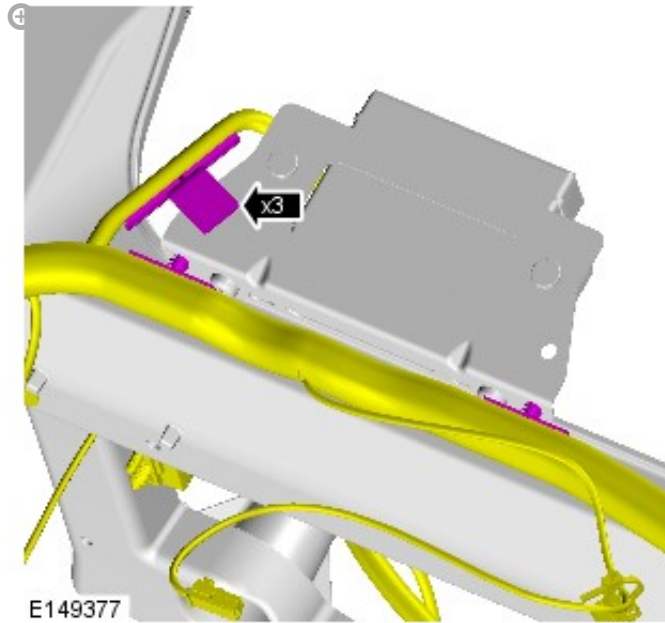

21.

CAUTION:

Install all the bolts finger tight before final tightening.

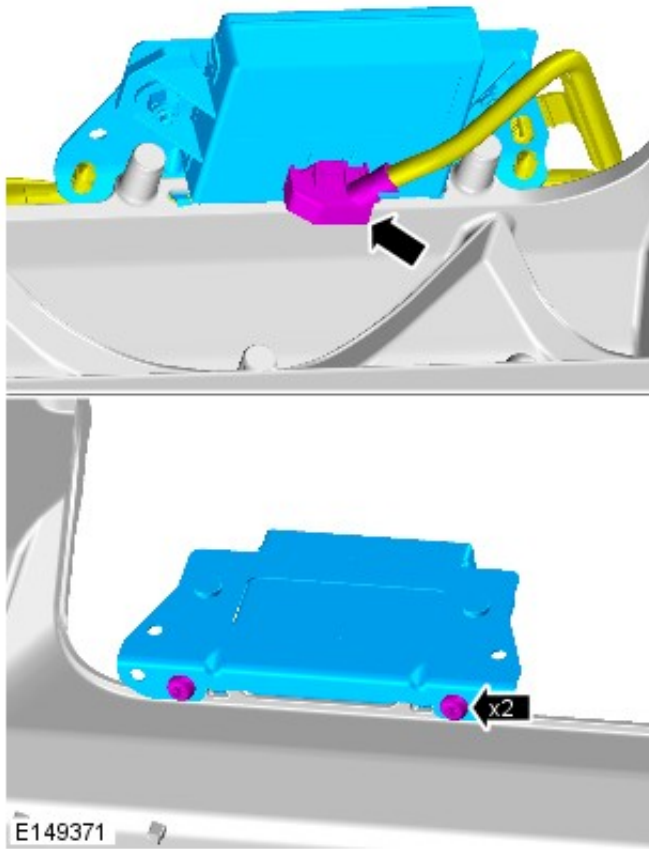

Torque: 9 Nm


22.



23.

CAUTION:

Install all the bolts finger tight before final tightening.

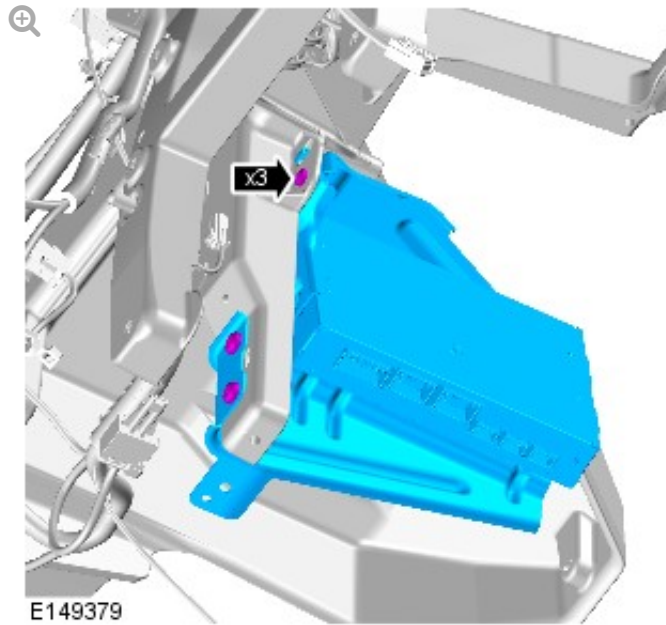


Torque: 9 Nm



NAS vehicles

24.

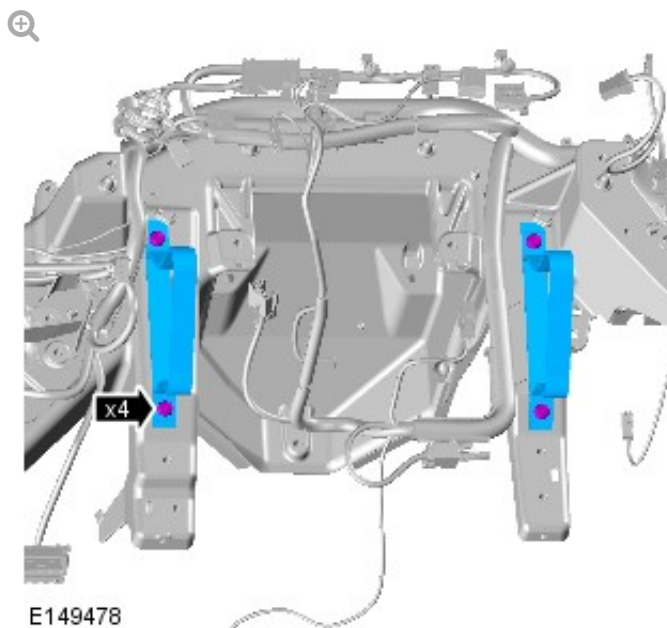

Torque: 9 Nm





All vehicles

25.


CAUTION:

Install all the bolts finger tight before final tightening.

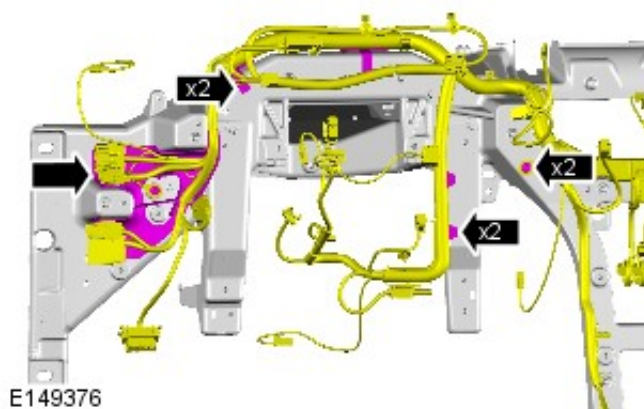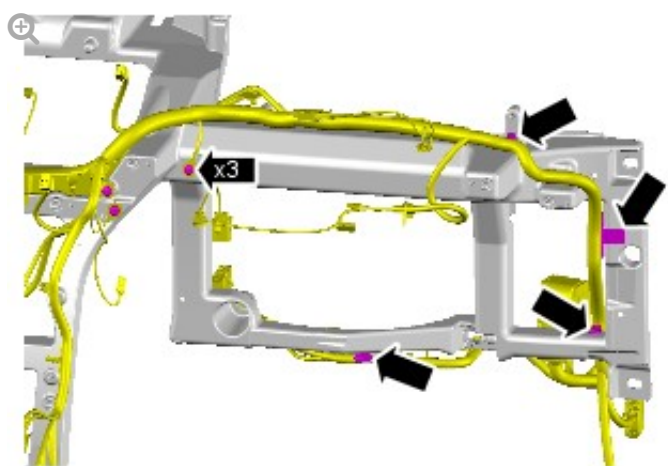


Torque: 12 Nm

26.

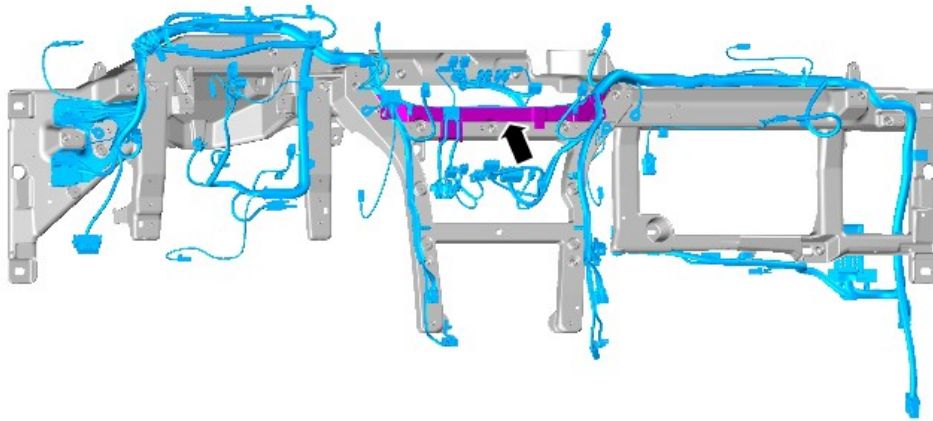

E149381

27.

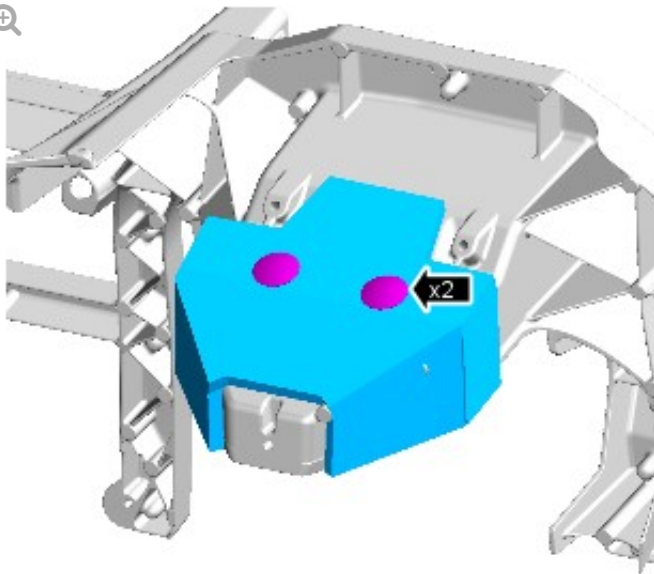


E149378

INSTALLATION

1.

NOTE:

Install new retaining clips.

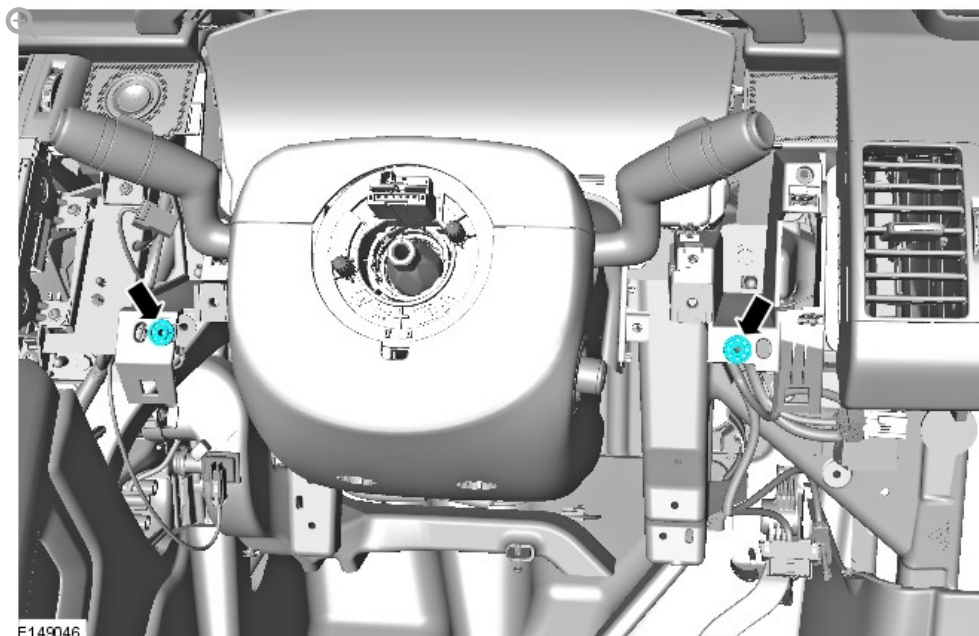

Torque: 1.1 Nm

2.

NOTE:

Install the trim retaining clips in the moulding prior to installing the components.



E149095

3. To install, reverse the removal procedure.

