

2016.0 RANGE ROVER (LG), 501-12

INSTRUMENT PANEL AND CONSOLE - STANDARD WHEEL BASE

IN-VEHICLE CROSSBEAM - GTDI 2.0L PETROL [G1772256]

REMOVAL AND INSTALLATION

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.



All vehicles

1.

WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

2. Make the SRS system safe.

Refer to: [Standard Workshop Practices](#) (100-00 General Information, Description and Operation).


3. Refer to: [Heater Core and Evaporator Housing - GTDi 2.0L Petrol](#)

4.

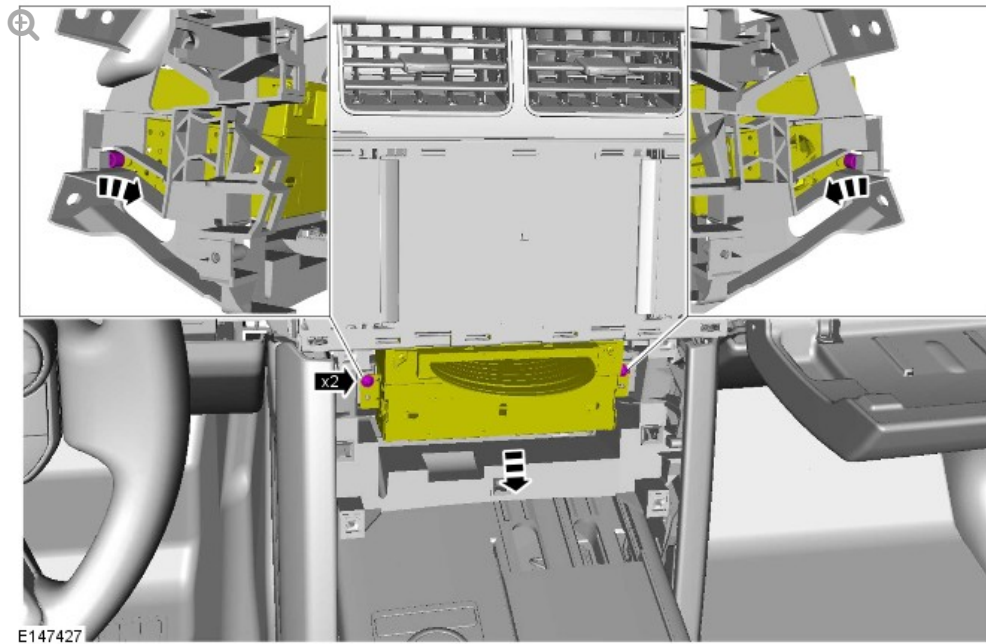


Torque: 2.2 Nm



5.

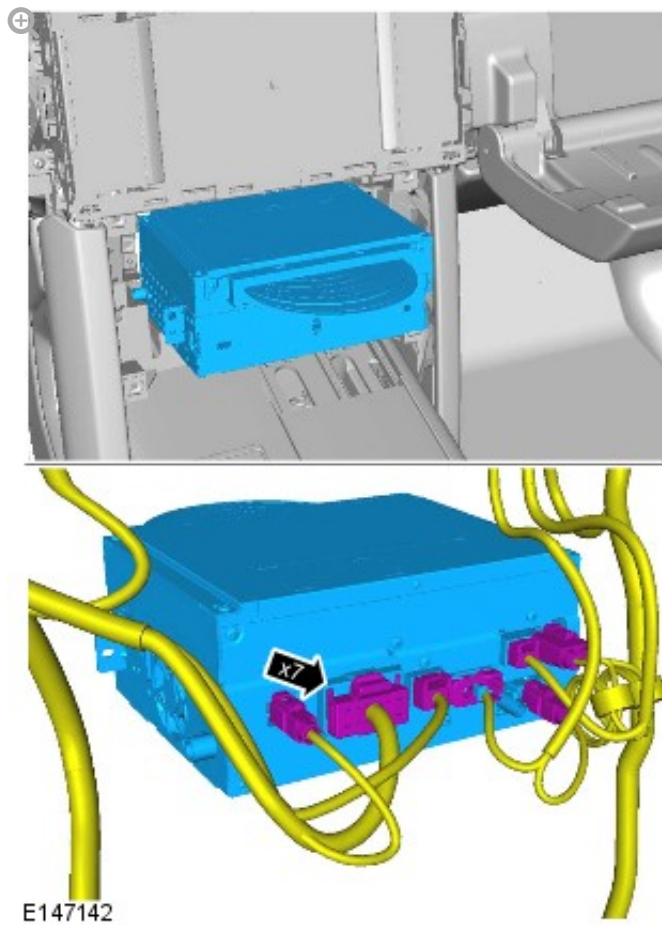



6.

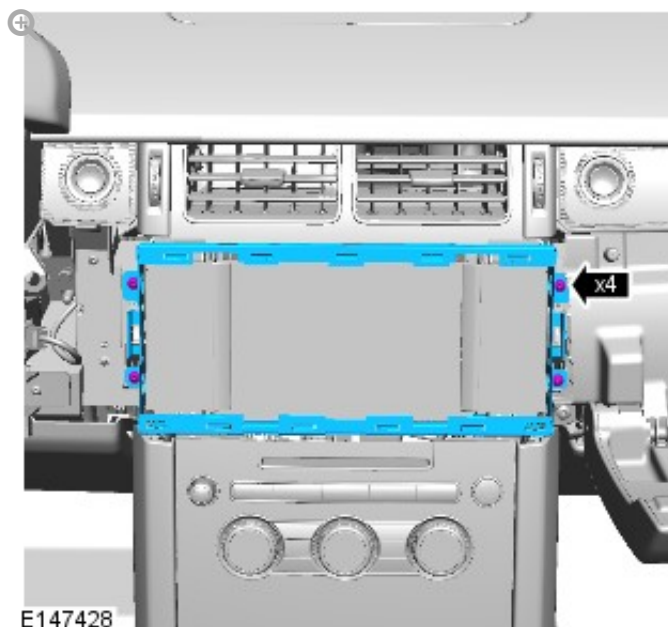

7.

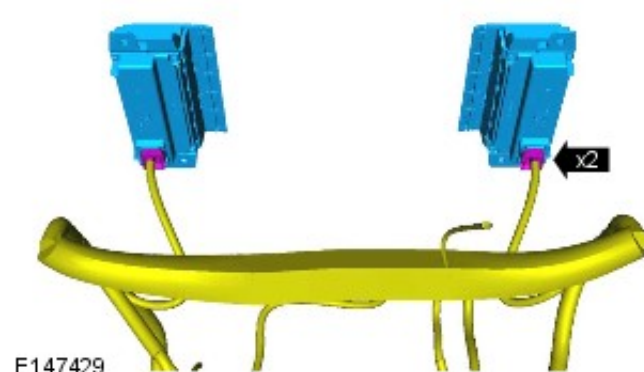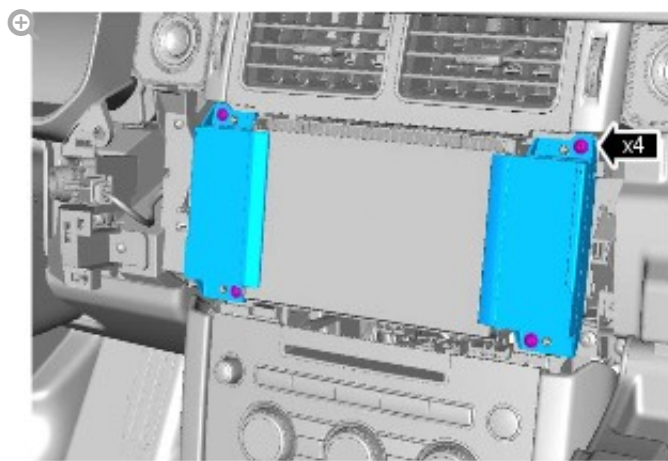


8.

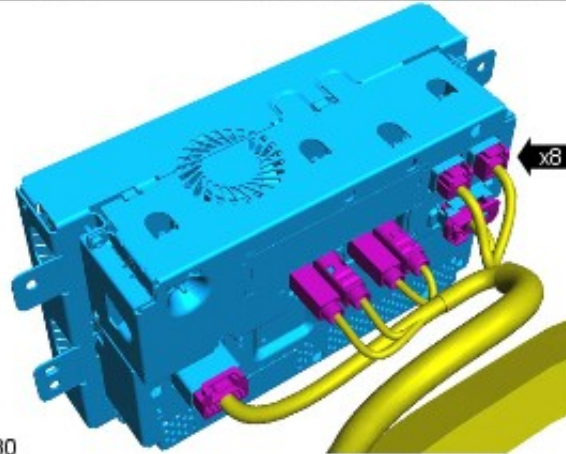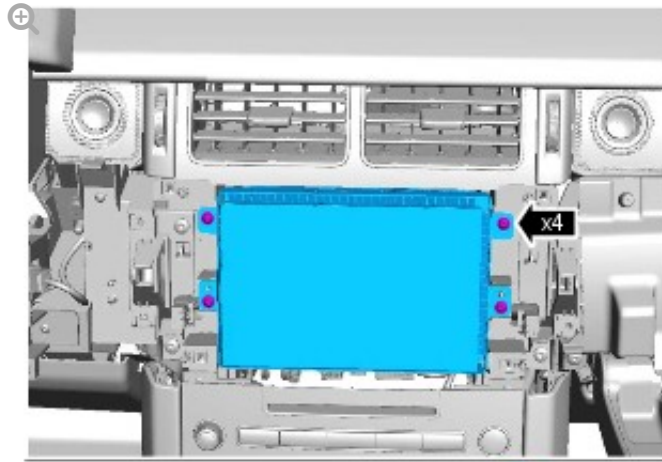


E147430

9.

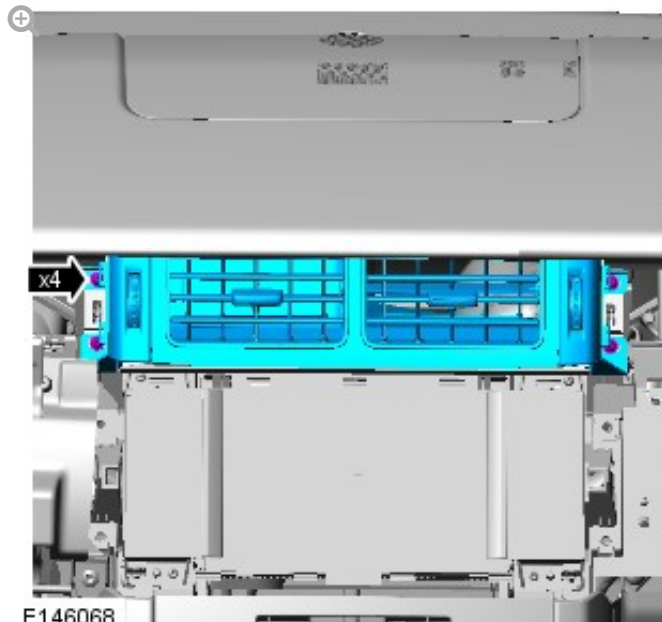


E146068


10.

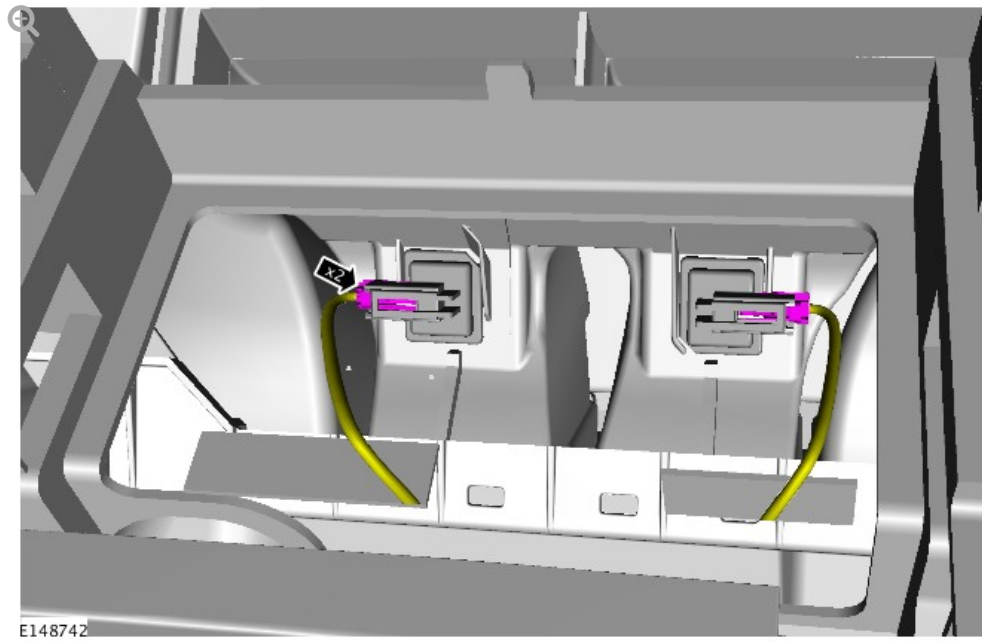


11.

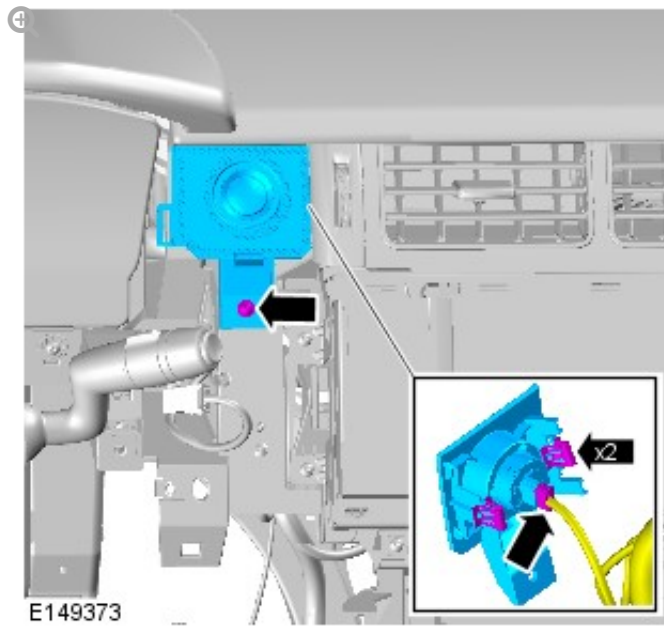


12.

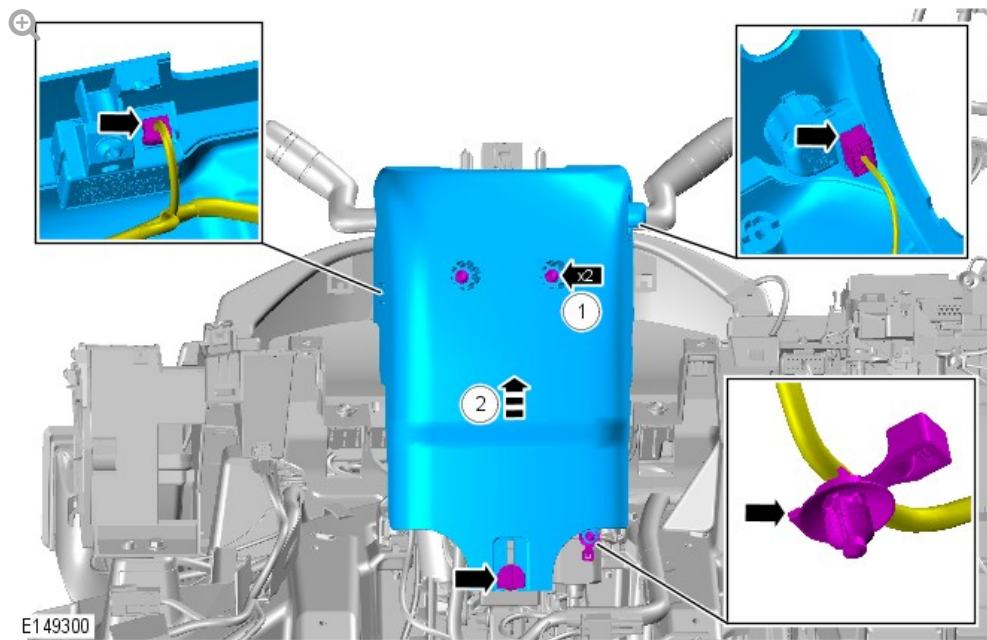

13.

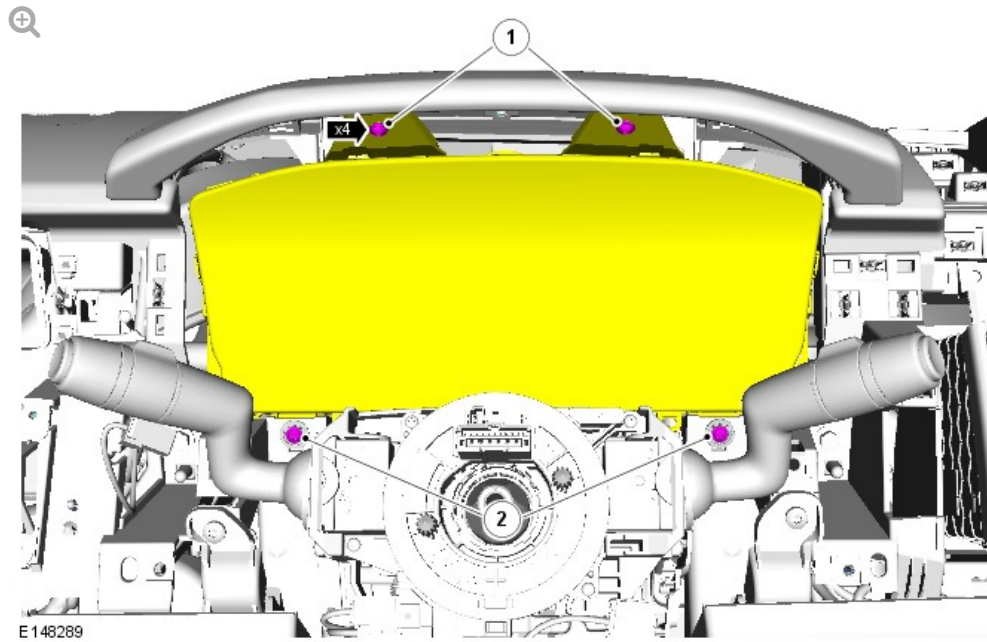

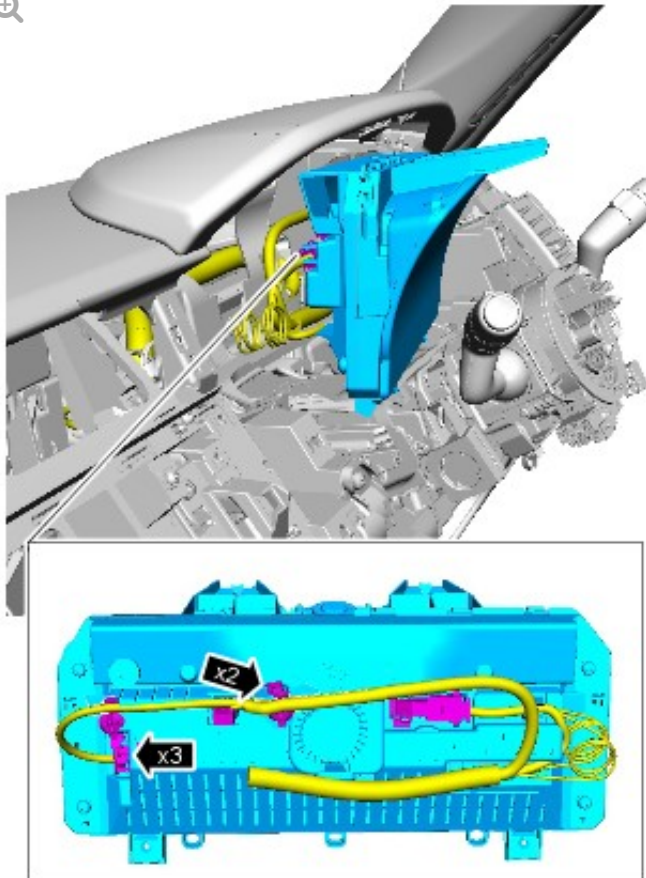


E148290

15.



16.

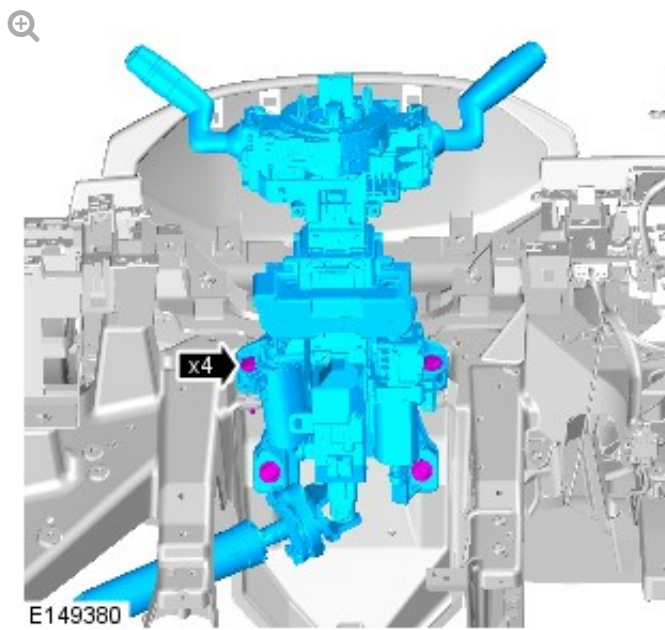


Torque: 25 Nm

17.

CAUTION:

Install all the bolts finger tight before final tightening.

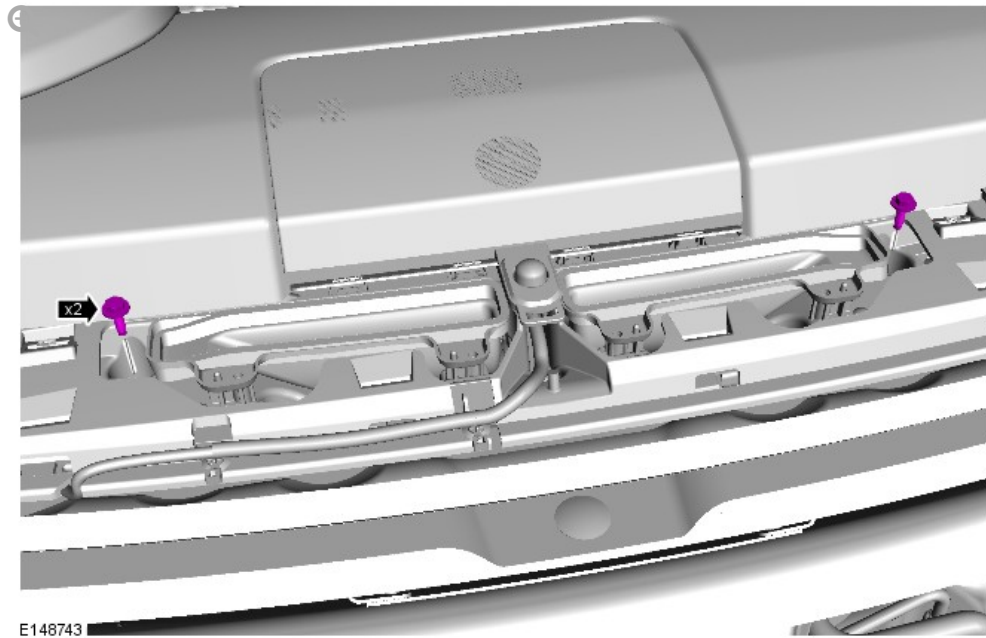


Torque: 9 Nm

18.

NOTE:

Install the bolt finger tight before final tightening.

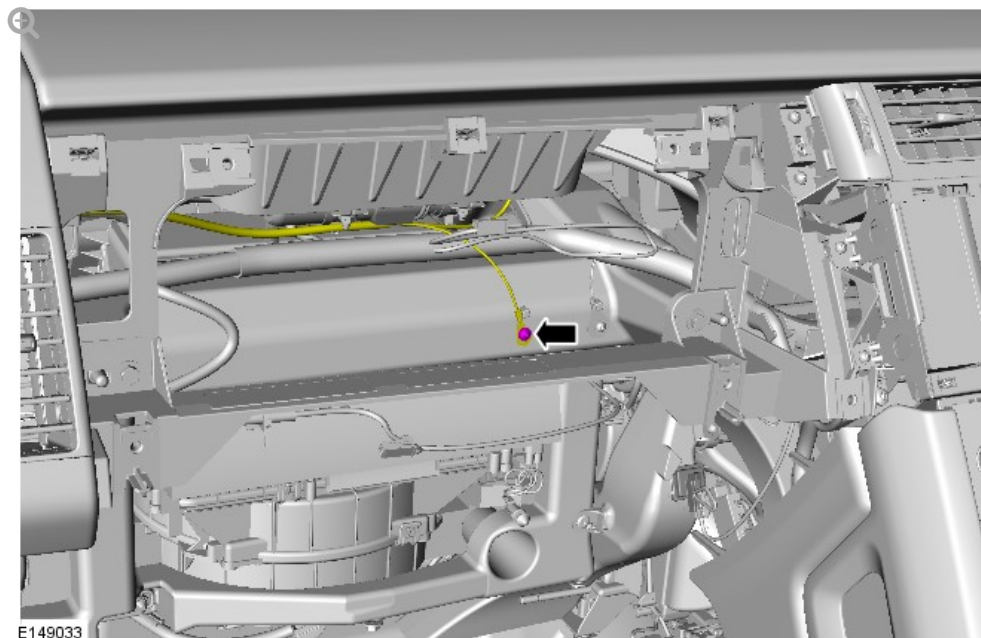


Torque: 12 Nm

19.


CAUTION:

Install all the bolts finger tight before final tightening.

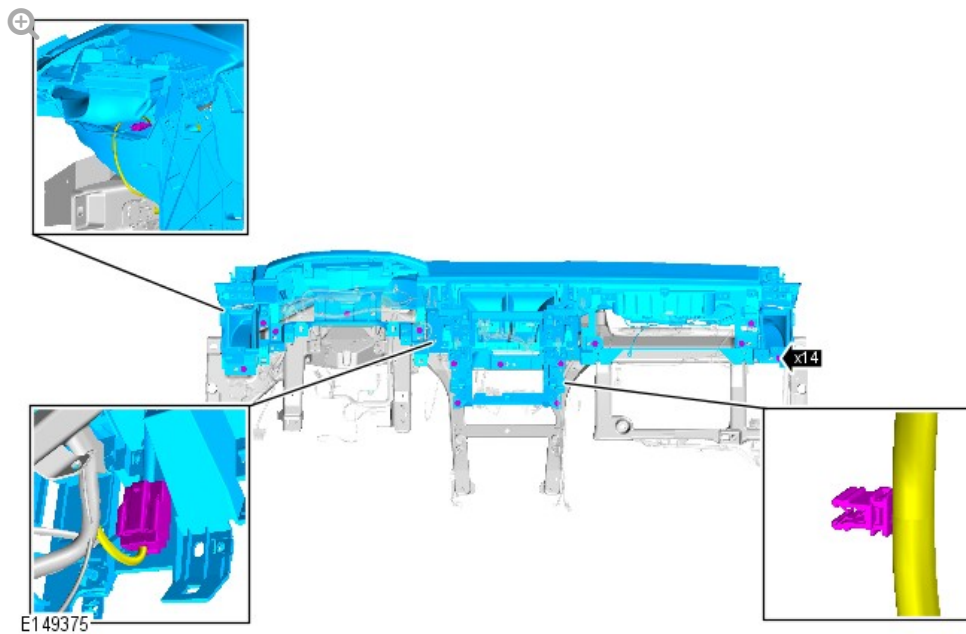

Torque: 9 Nm


20.

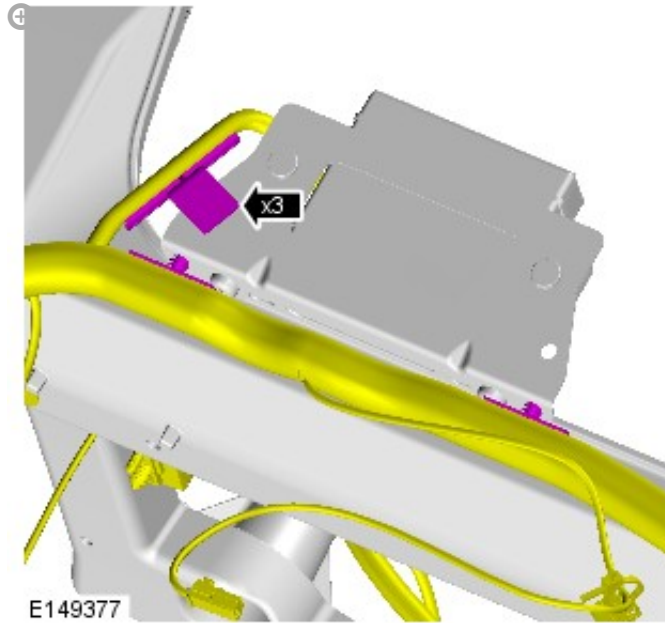

21.

CAUTION:


Install all the bolts finger tight before final tightening.

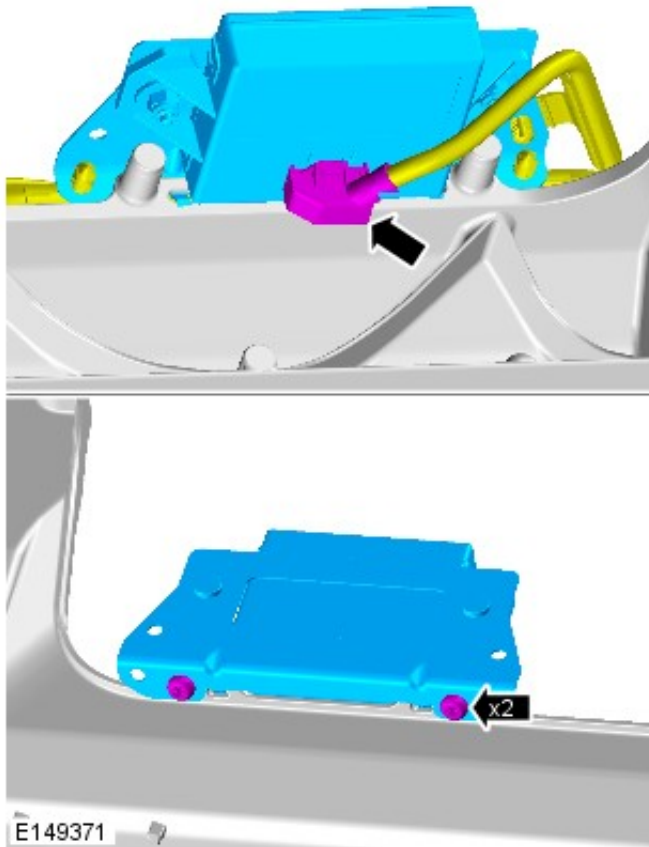

E149371

Torque: 9 Nm

22.

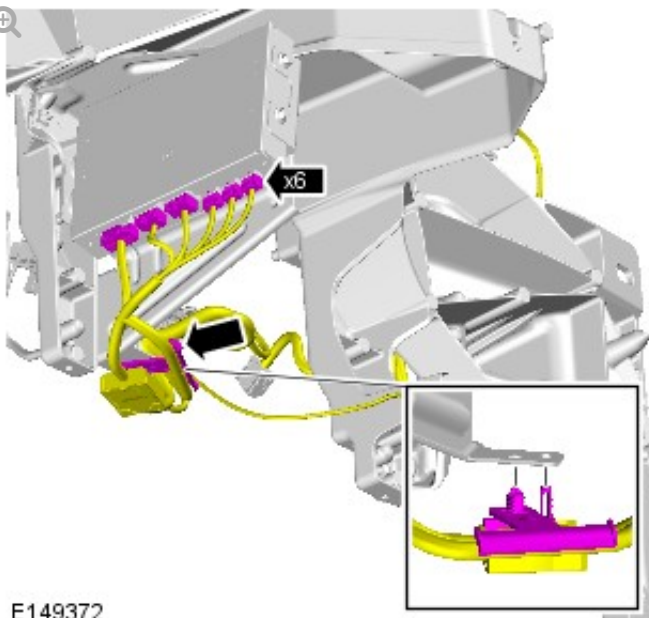


E149372

23.

CAUTION:

Install all the bolts finger tight before final tightening.

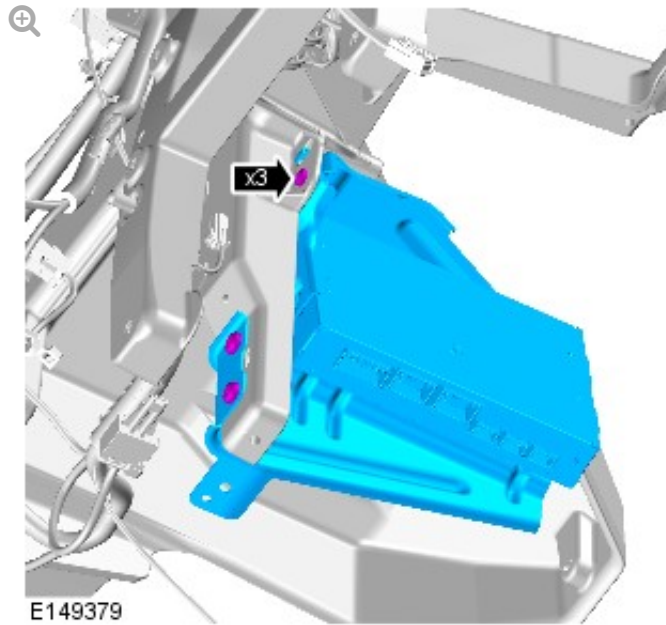


Torque: 9 Nm



NAS vehicles

24.

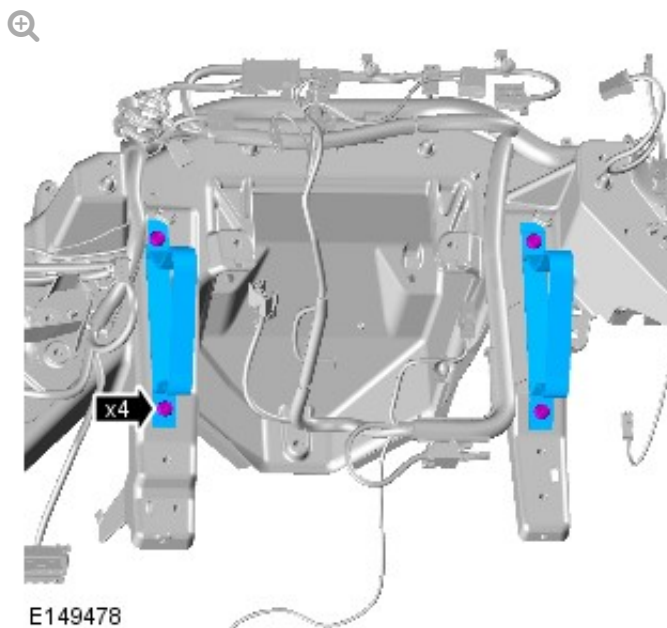

Torque: 9 Nm





All vehicles

25.


CAUTION:

Install all the bolts finger tight before final tightening.

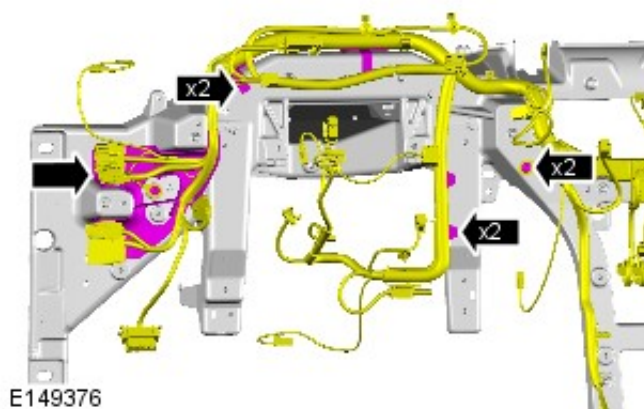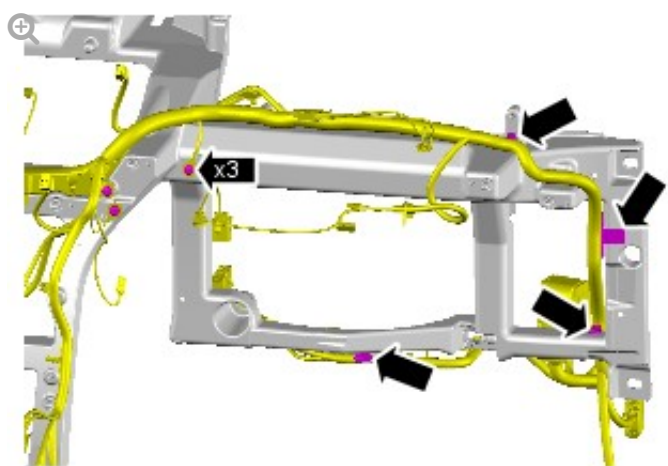


Torque: 12 Nm

26.

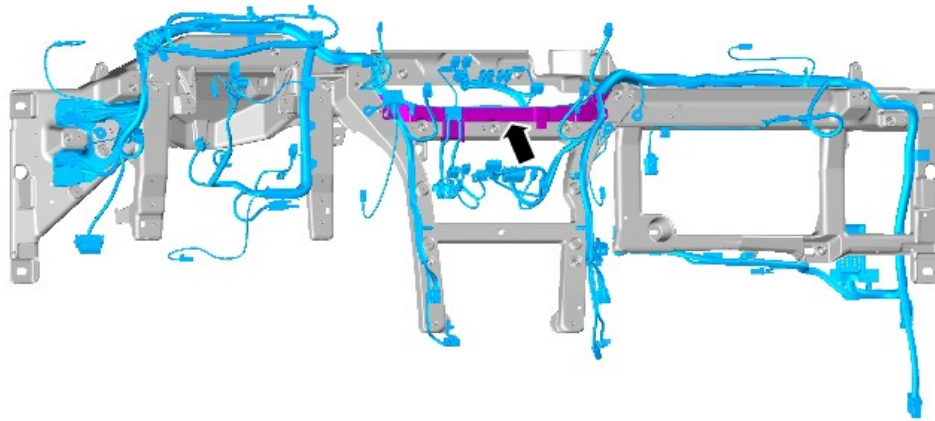

E149381

27.

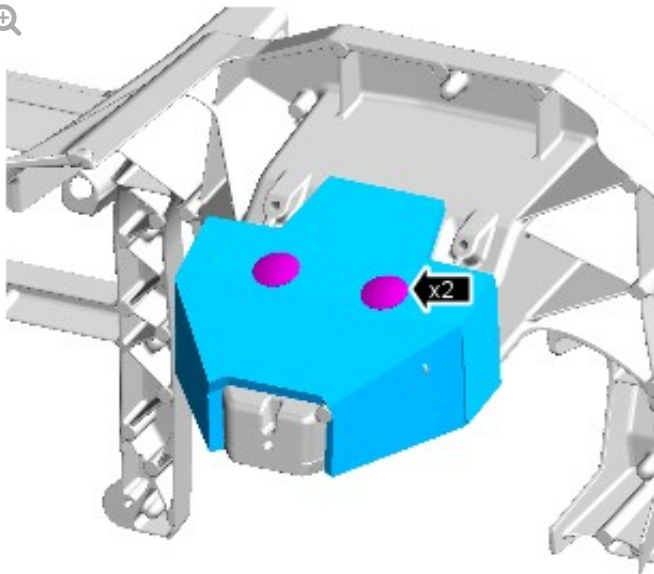


E149378

INSTALLATION

1.

NOTE:

Install new retaining clips.

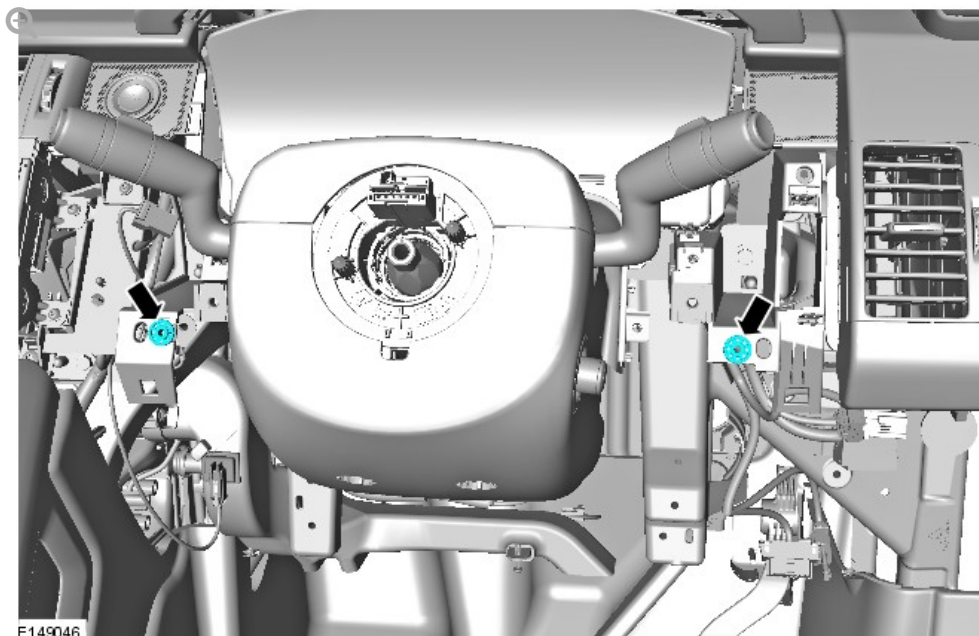

Torque: 1.1 Nm

2.

NOTE:

Install the trim retaining clips in the moulding prior to installing the components.



E149095

3. To install, reverse the removal procedure.

