

2016.0 RANGE ROVER (LG), 501-17

ROOF OPENING PANEL


ROOF OPENING PANEL ALIGNMENT [G928367]

GENERAL PROCEDURES

1.

NOTES:


- The roof opening panel must be closed
- With the roof opening panel closed, check the alignment of the glass to the roof panel. The glass should be central in its aperture. Profile of rear glass panel to body: front edge, set flush or up to 1.0 mm (0.040") low; rear edge, set flush or up to 1.0 mm (0.040") high.

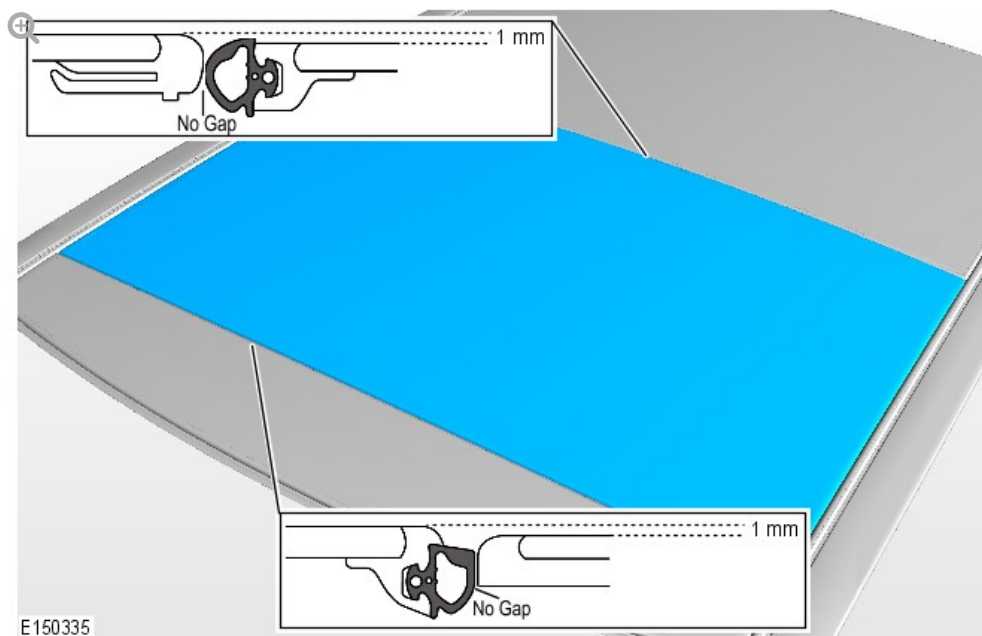

Check the alignment of the roof opening panel.

- The roof opening panel should be central in the roof opening.

2.

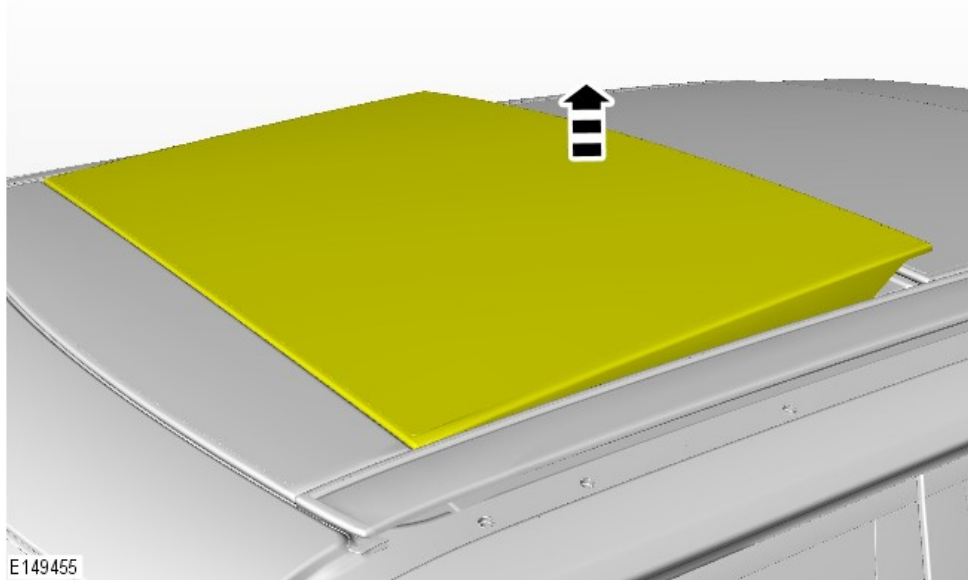


Raise the roof opening panel glass.

- Open the roof opening panel shield.

3.

NOTES:

- The step must be carried out on both sides.
- RH shown LH similar.

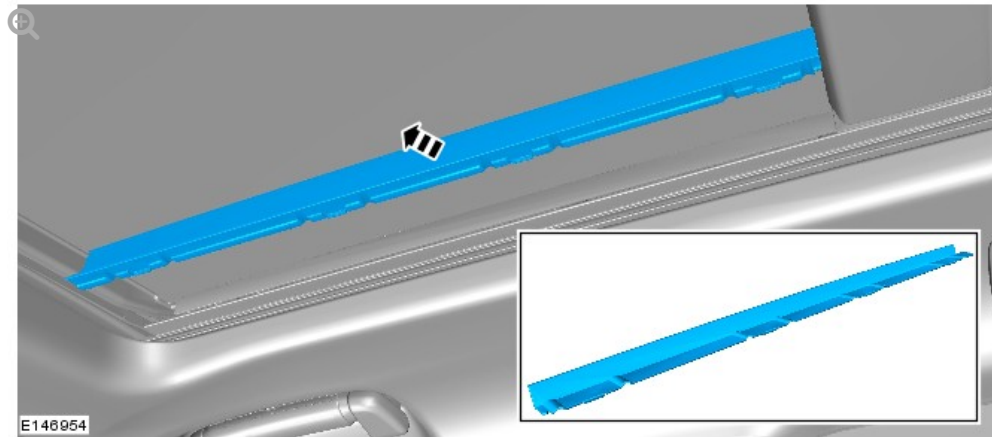


Release the upper edges of the RH and LH roof opening panel side trims.

4.


NOTES:

- The step must be carried out on both sides.
- RH shown LH similar.

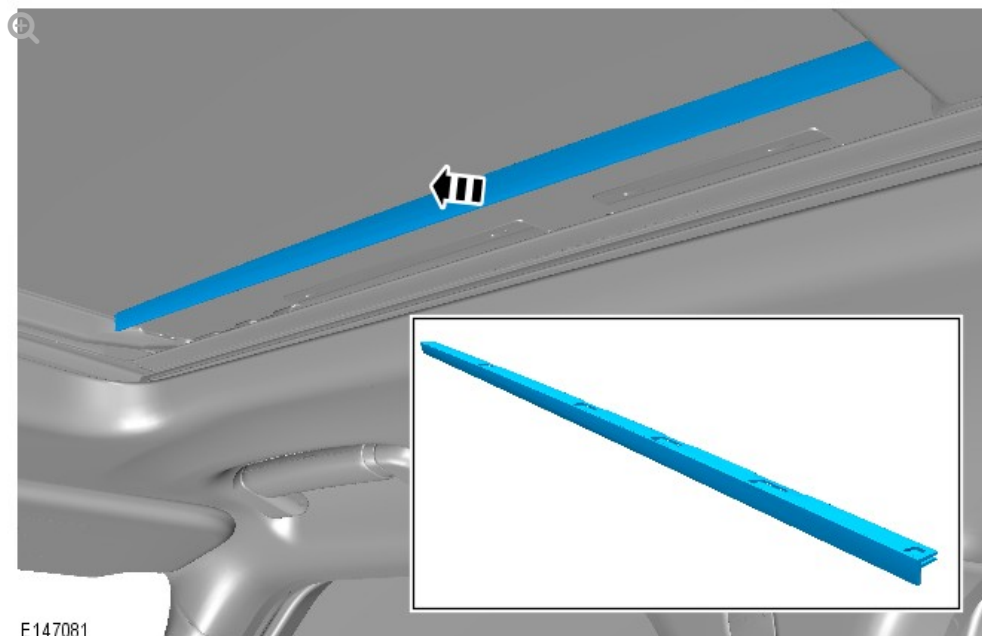

E147081

5.

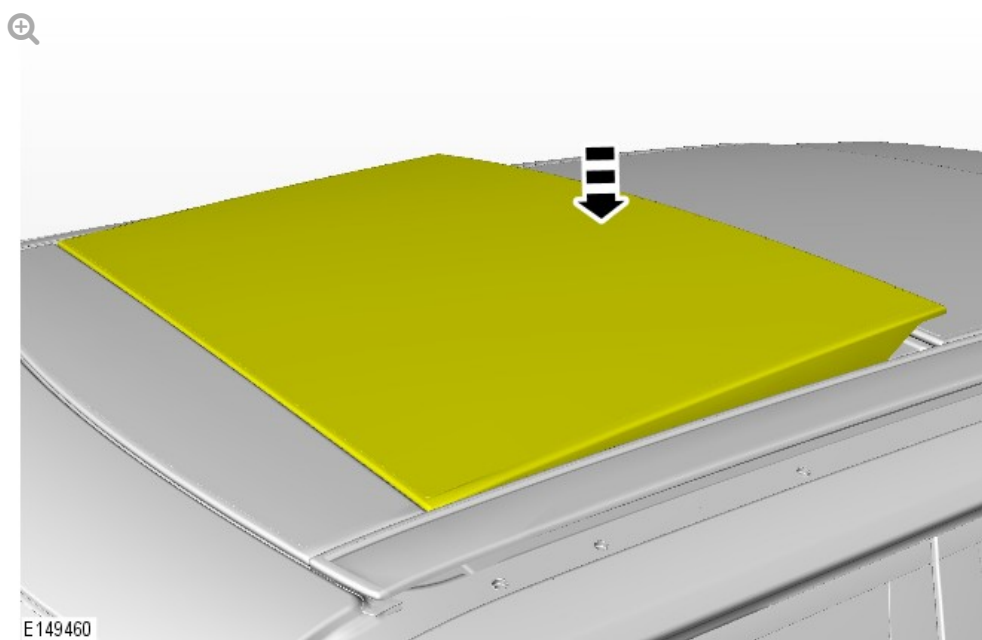


E149460

Close the roof opening panel.

6.

NOTE:

RH shown LH similar.

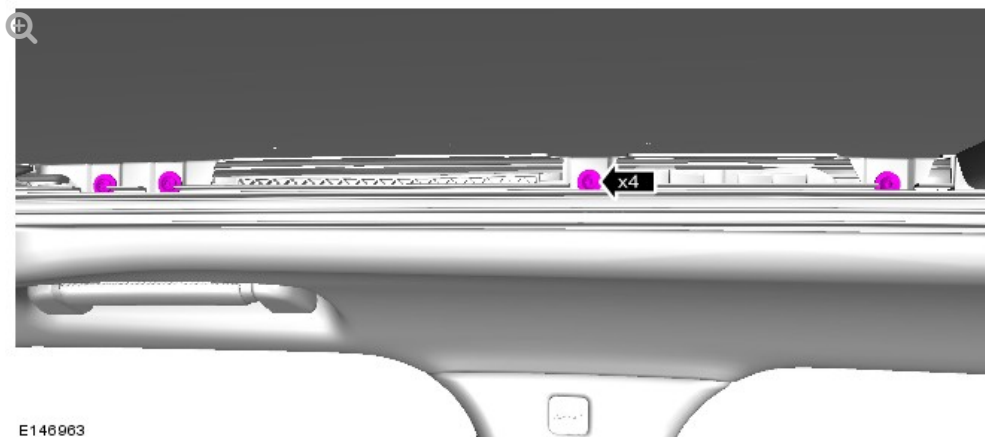

Loosen the 4 screws.


7.

CAUTION:

Make sure the glass laminate is not damaged during remove and installation.

NOTE:

With the roof opening panel closed, check the alignment of the glass to the roof panel. The glass should be central in its aperture. Profile of rear glass panel to body: front edge, set flush or up to 1.0 mm (0.040") low; rear edge, set flush or up to 1.0 mm (0.040") high.

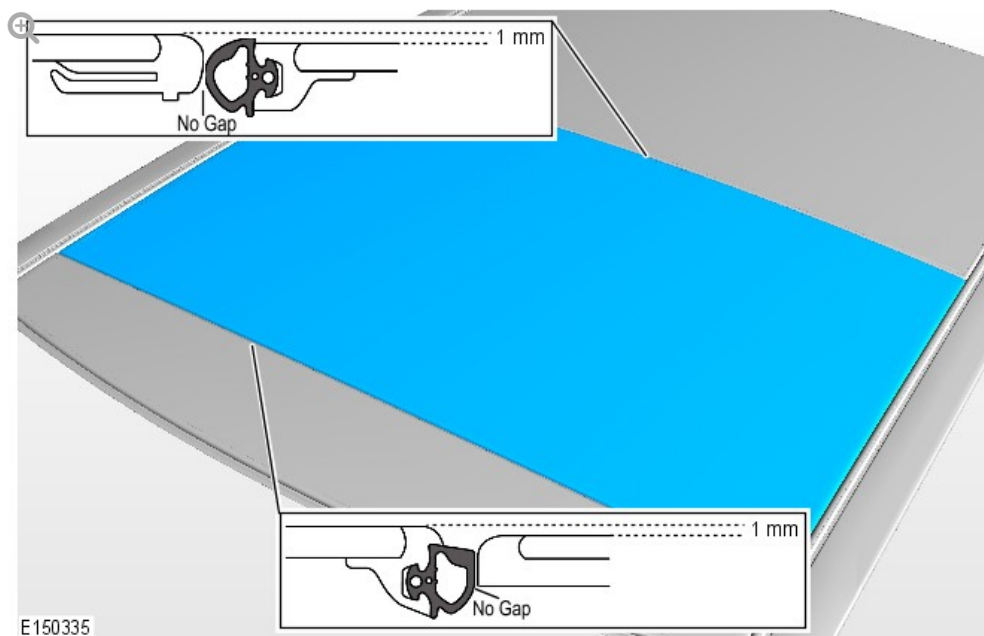


Align the roof opening panel glass.

8.

NOTE:

Apply force to the top of the glass panel to aid alignment.

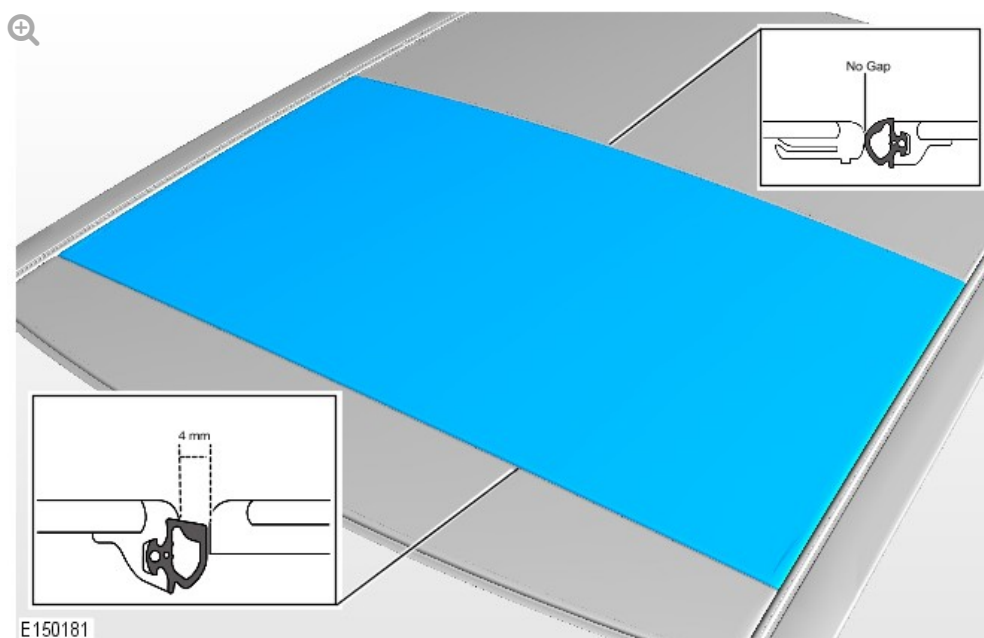


Align the roof opening panel glass.

- Tighten the screws to 5 Nm.

9.

NOTES:

- RH shown LH similar.
- This step requires the aid of another technician.

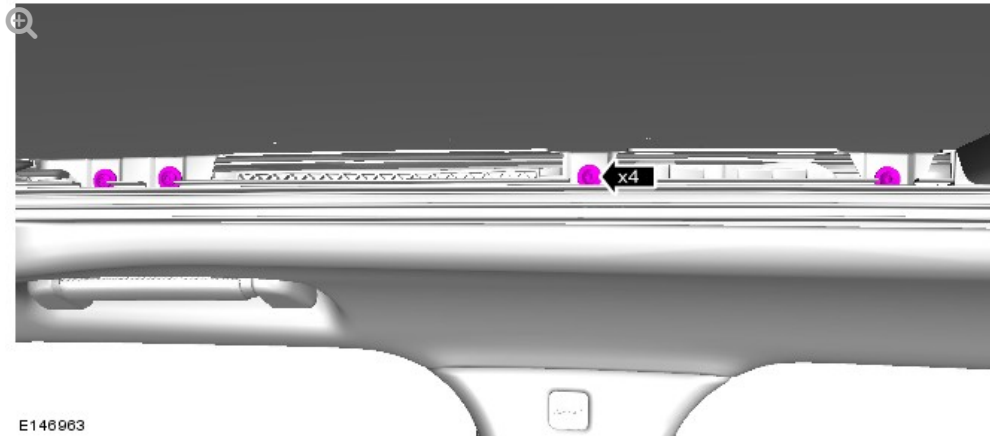


With assistance position the moving panel and tighten the fixings.

10.

NOTES:

- The step must be carried out on both sides.
- RH shown LH similar.

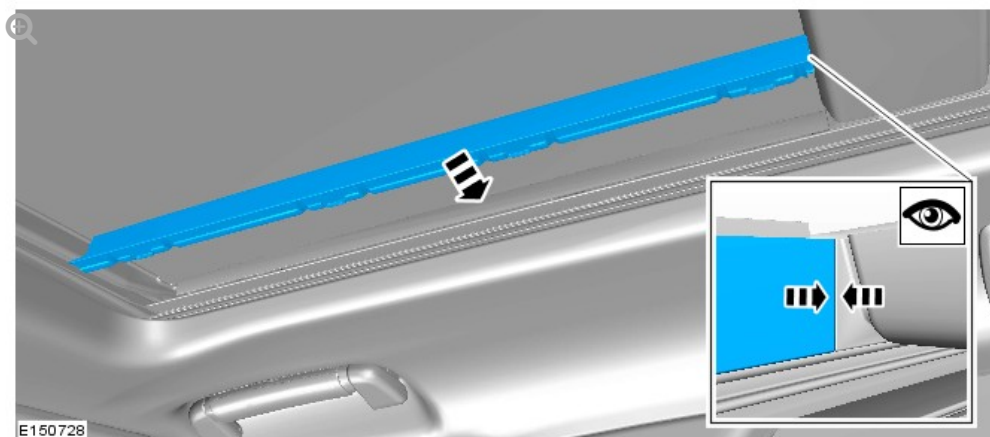


Secure the upper edges of the RH and LH roof opening panel side trims.

11.

NOTES:

- The step must be carried out on both sides.
- RH shown LH similar.

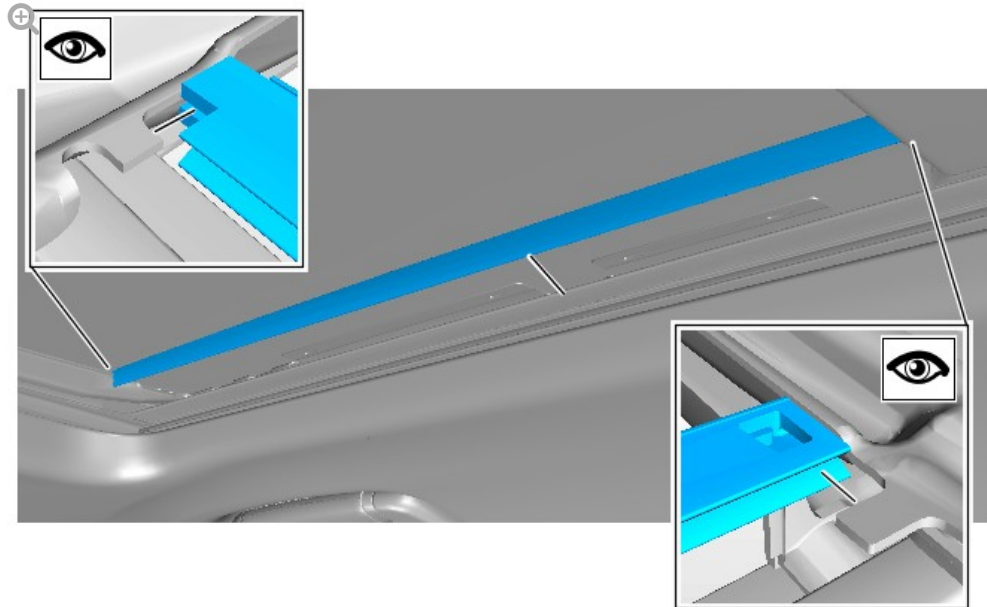

E150764