

2016.0 RANGE ROVER (LG), 501-17

ROOF OPENING PANEL

ROOF OPENING PANEL BLIND CROSS BRACE (G1842195)


REMOVAL AND INSTALLATION

REMOVAL

CAUTION:

Steps in this procedure require the aid of another technician to support the roof opening panel blind, failure to follow this may result in damage to the vehicle.

1.

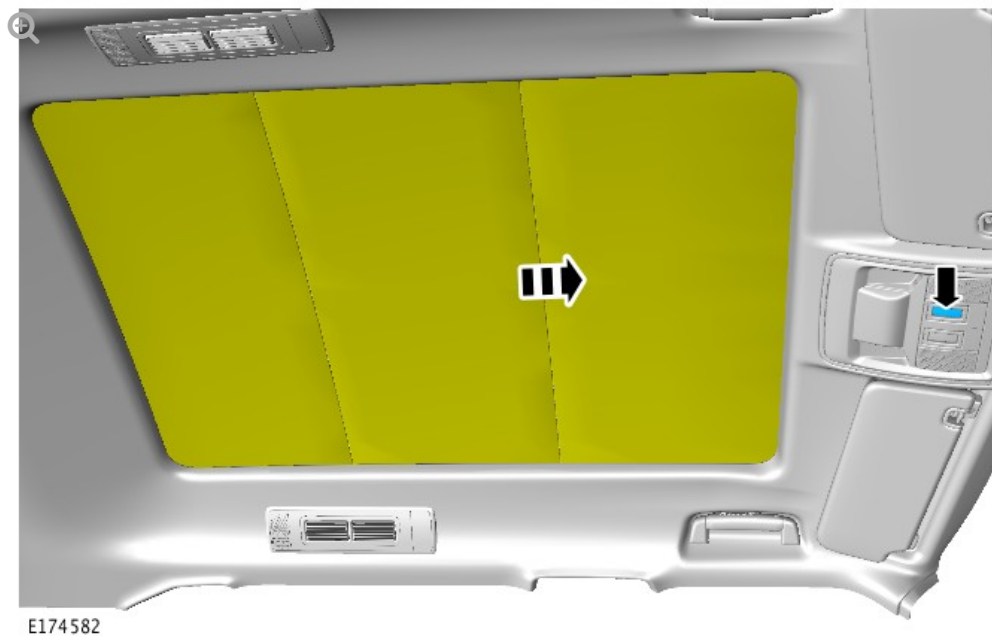


Close the roof opening panel blind.

2.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

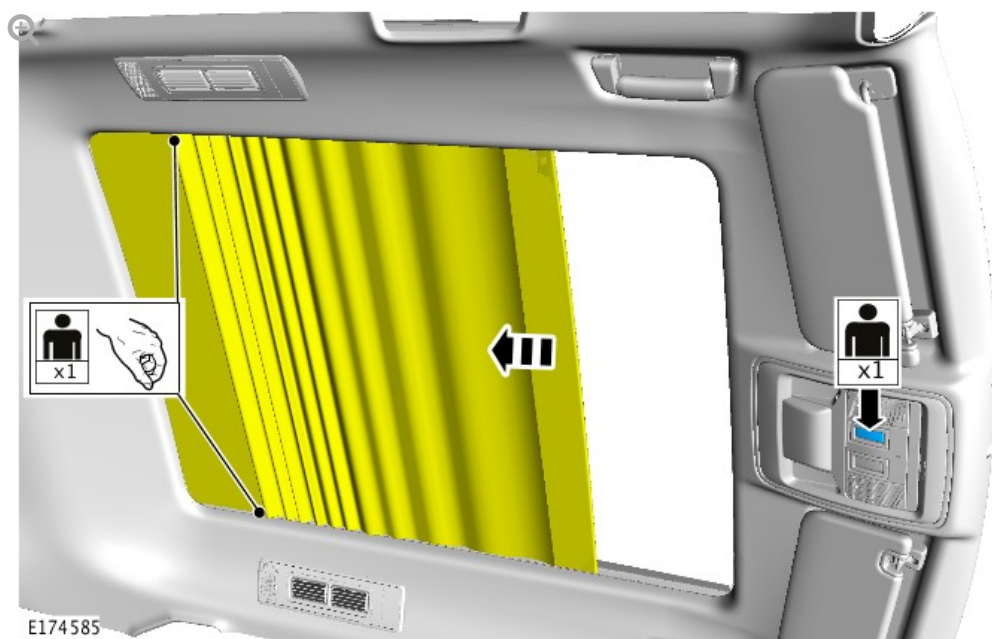


With the help of another technician, hold the rear section of the roof opening panel blind in the areas indicated, then open the roof

opening panel blind to the central position.

3.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

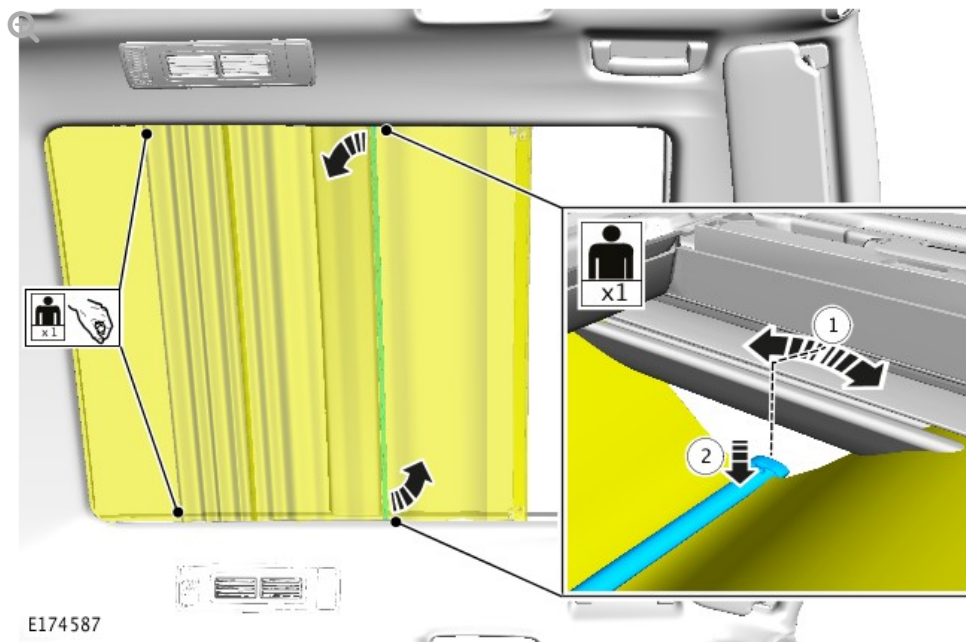


Release the roof opening panel blind cross brace from the guide rail on each side.

4.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

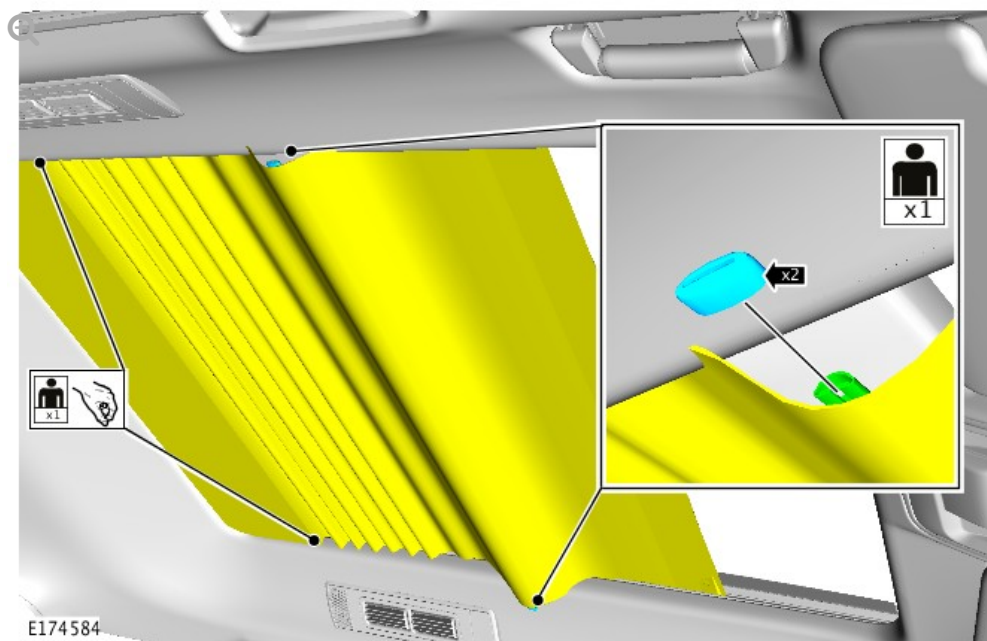


Remove the guide feet from each side of the roof opening panel blind cross brace.

5.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

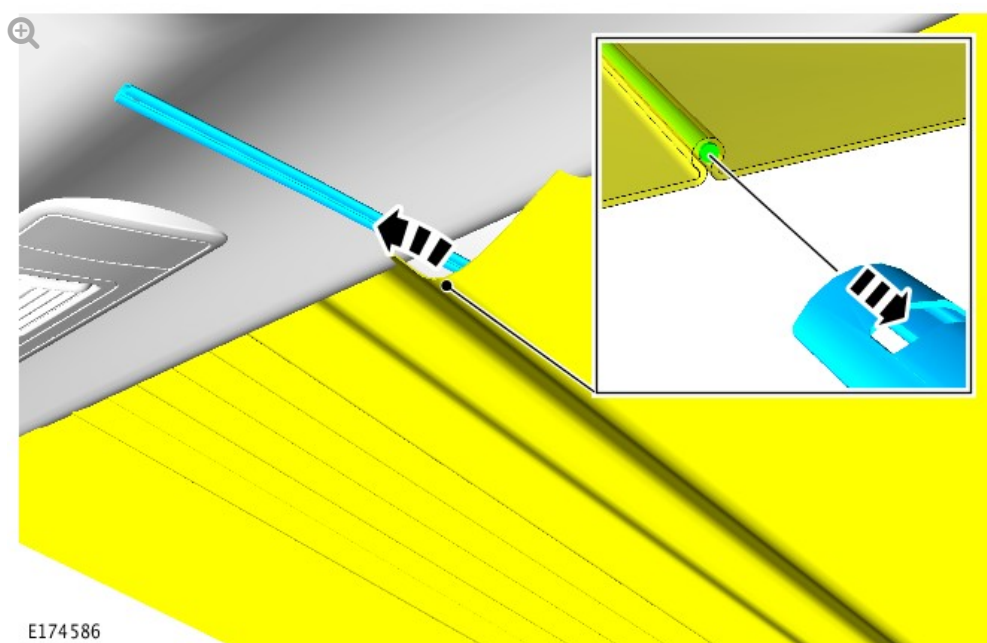

Lower the roof opening panel blind so that the cross brace can be


removed.

INSTALLATION

1.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

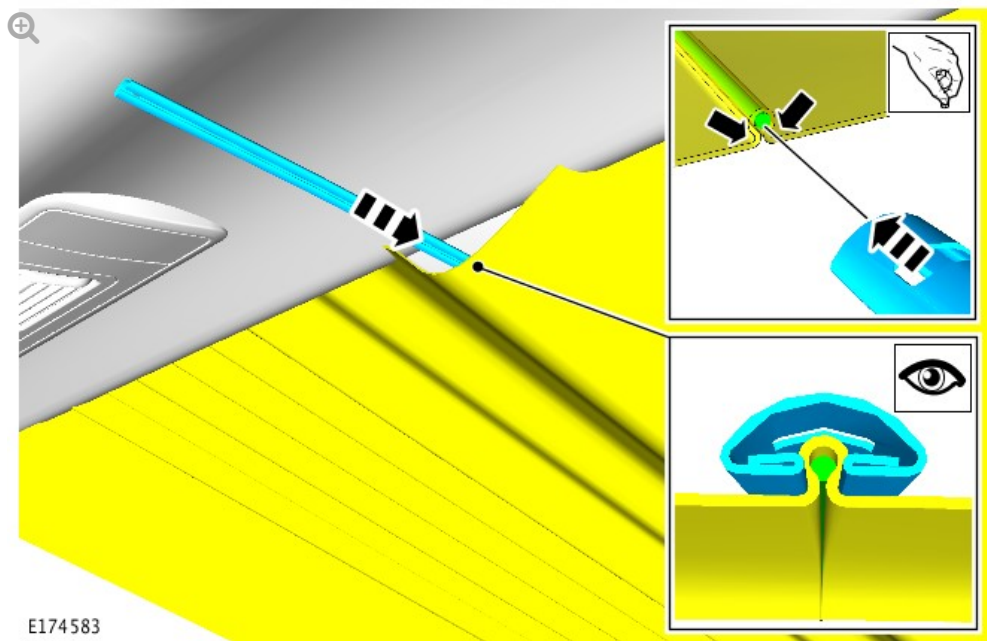


Install the roof opening panel blind cross brace.

2.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

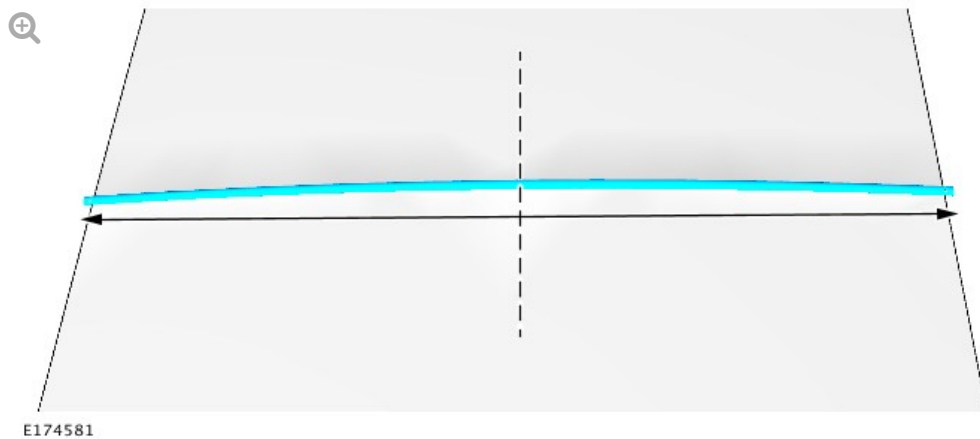


Make sure the roof opening panel blind cross brace is positioned central, as shown in the illustration.

3.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

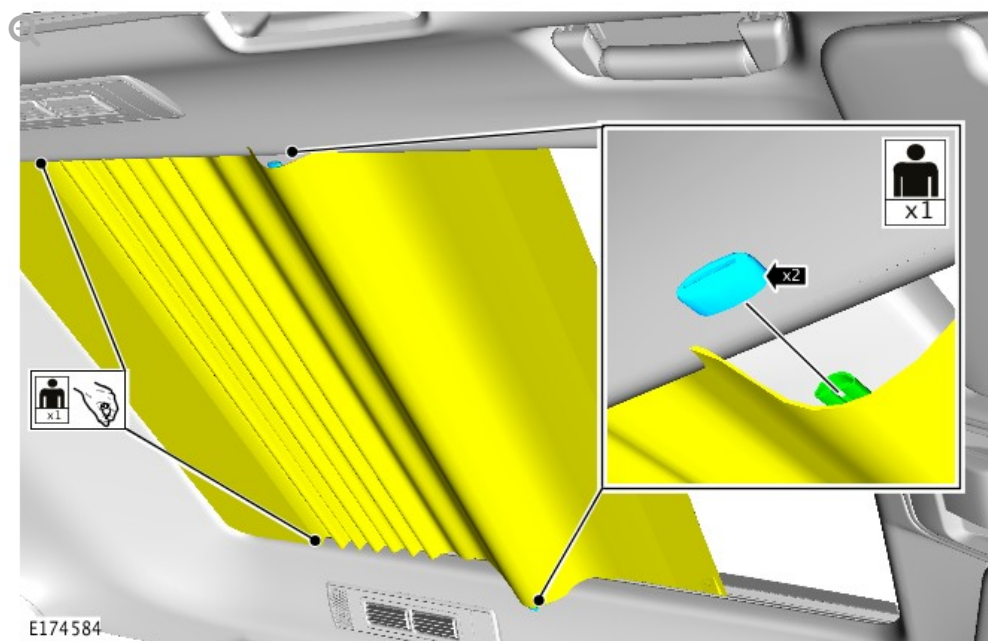


Install the guide feet to each side of the roof opening panel blind cross brace.

4.

CAUTION:

The rear section of the roof opening panel blind must be held by another technician during this step.

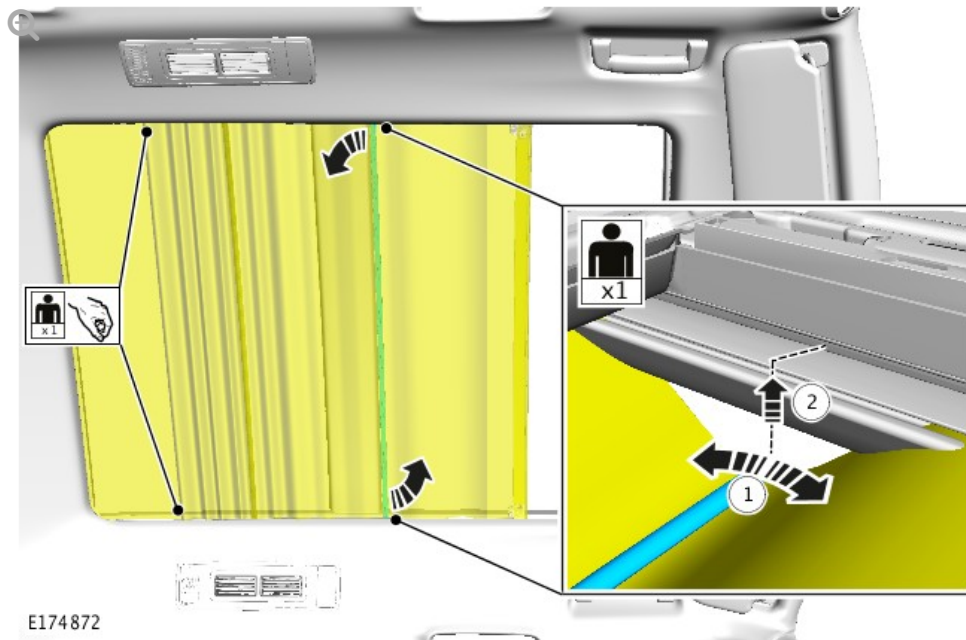


Install the roof opening panel blind cross brace into the guide rail on each side.

5.

NOTE:

The illustration shows the early design roof opening panel guide rail.

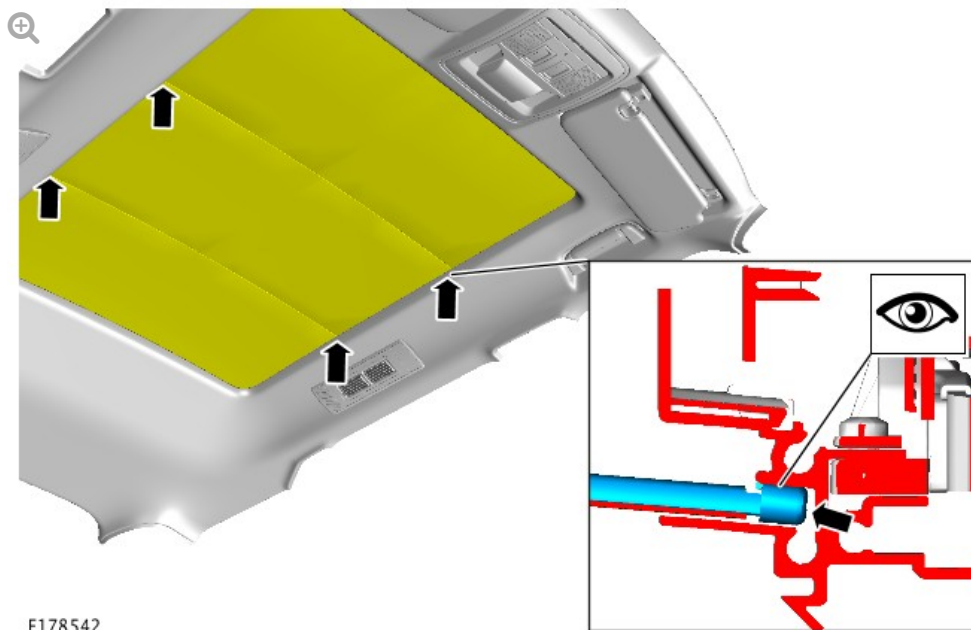


Make sure the roof opening panel blind feet are correctly located within the guide rail as shown.

6.

NOTE:


The illustration shows the later design roof opening panel guide rail.

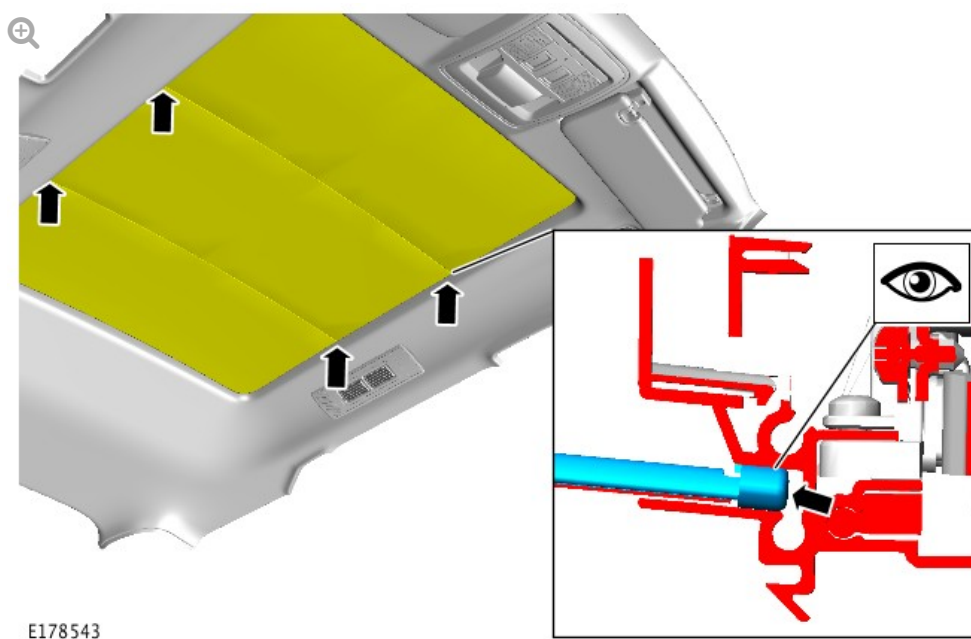

Make sure the roof opening panel blind feet are correctly located

within the guide rail as shown.

7.

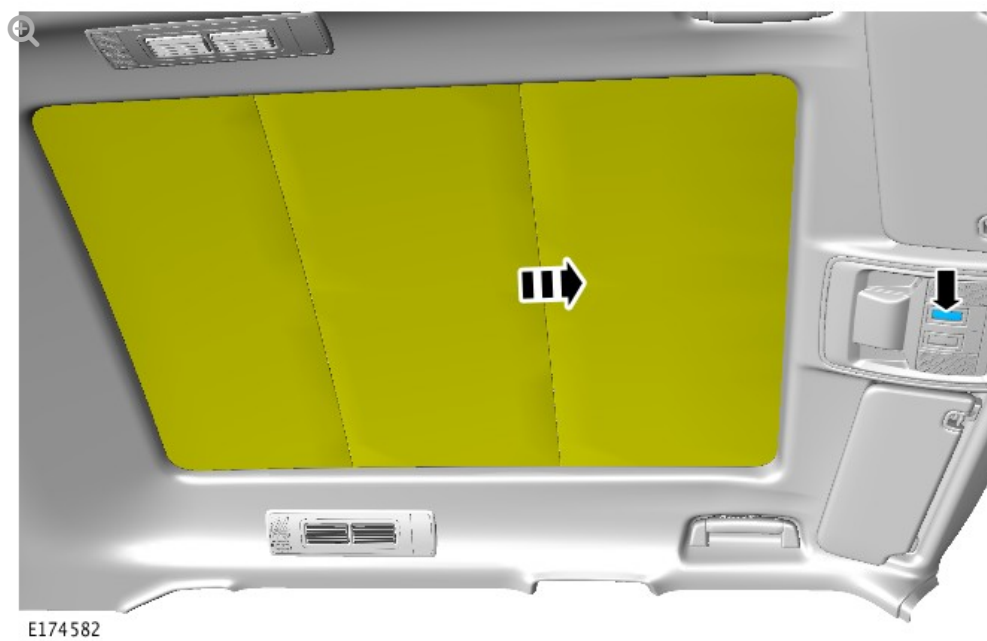

Release the rear of the roof opening panel blind and fully close.