

2016.0 RANGE ROVER (LG), 501-10

SEATING - LONG WHEEL BASE

FRONT ROW SEAT CUSHION COVER [G1702555]

REMOVAL AND INSTALLATION



REMOVAL

NOTES:

- Some variation in the illustrations may occur, but the essential information is always correct.
- Removal steps in this procedure may contain installation details.


1. Refer to: Front Seat (501-10, Removal and Installation).

2.

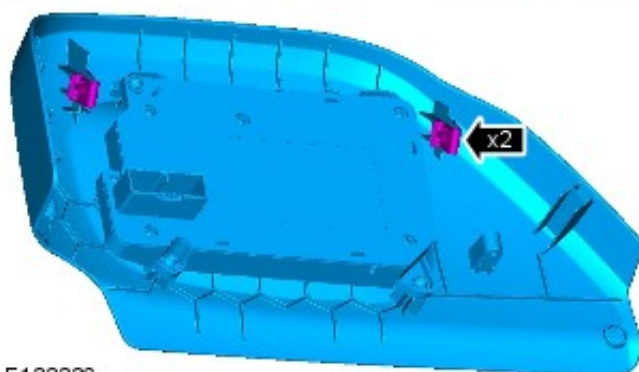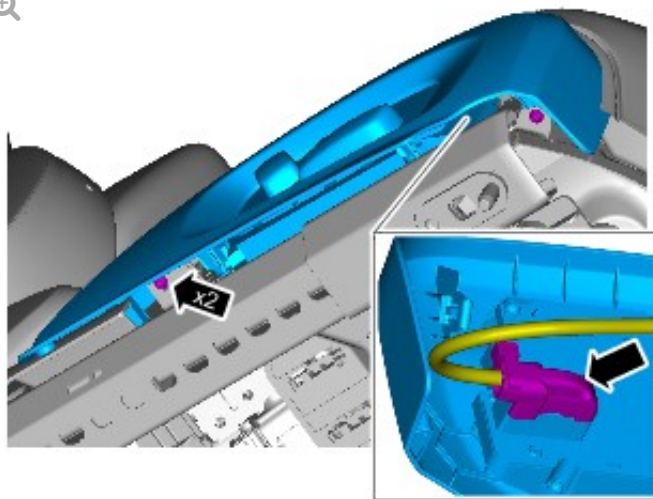


E133236

3.

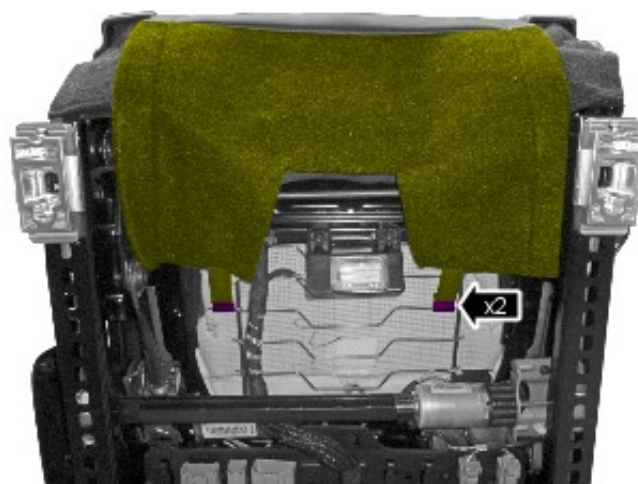


E143833

4.

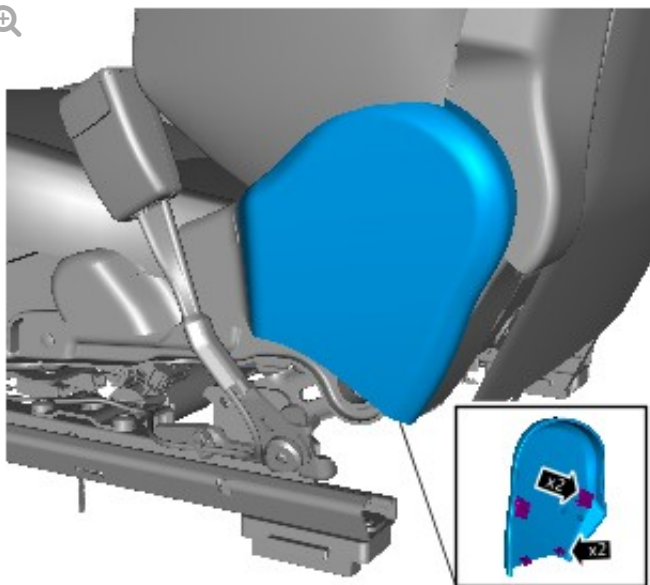


E161742

5.

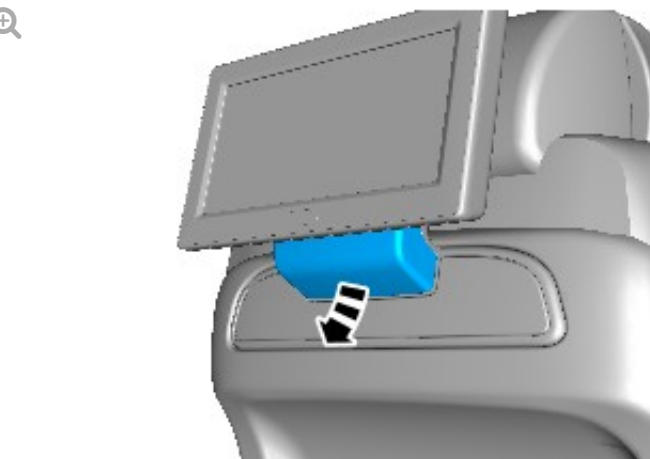


E161743

6.

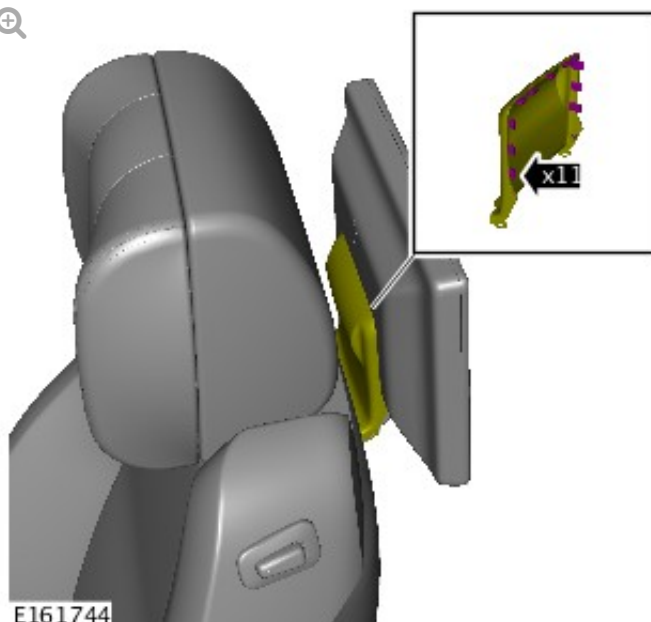


E161744

7.

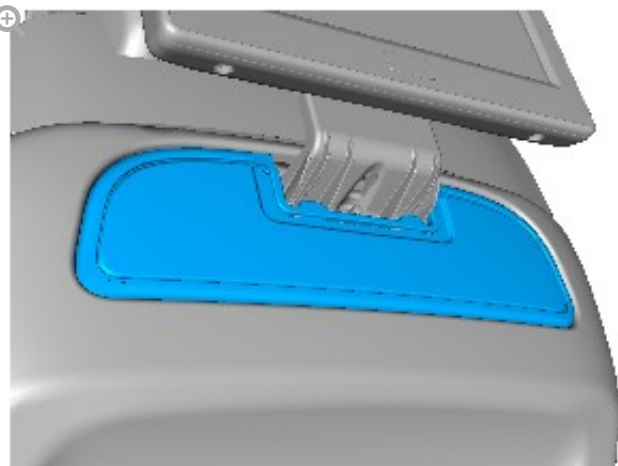


E161745

8.

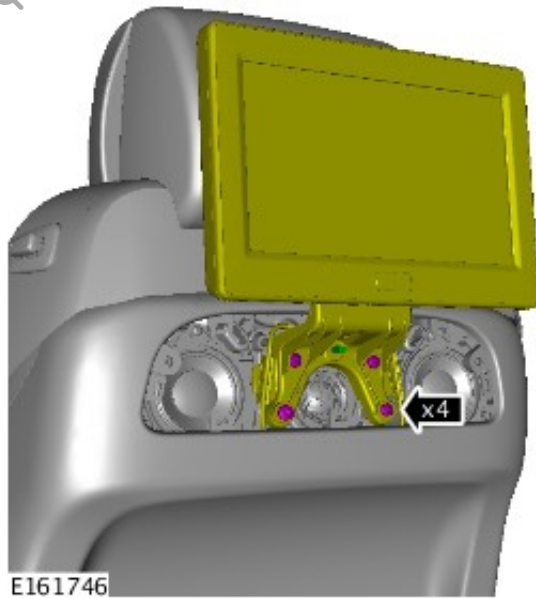

Torque: 6 Nm


9.

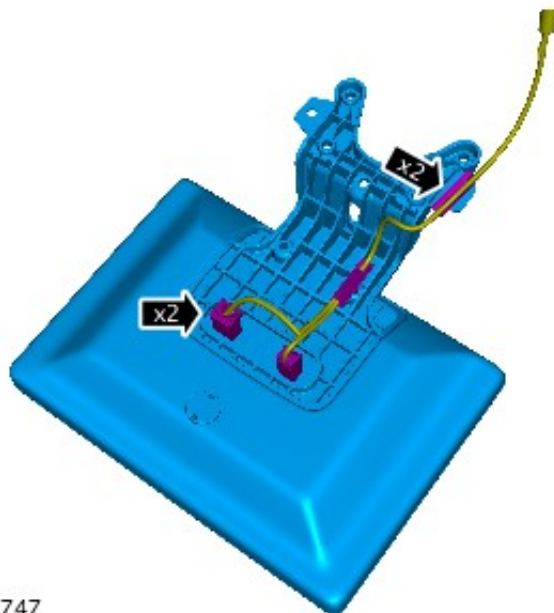


10.

NOTE:


Repeat the step for the other side.

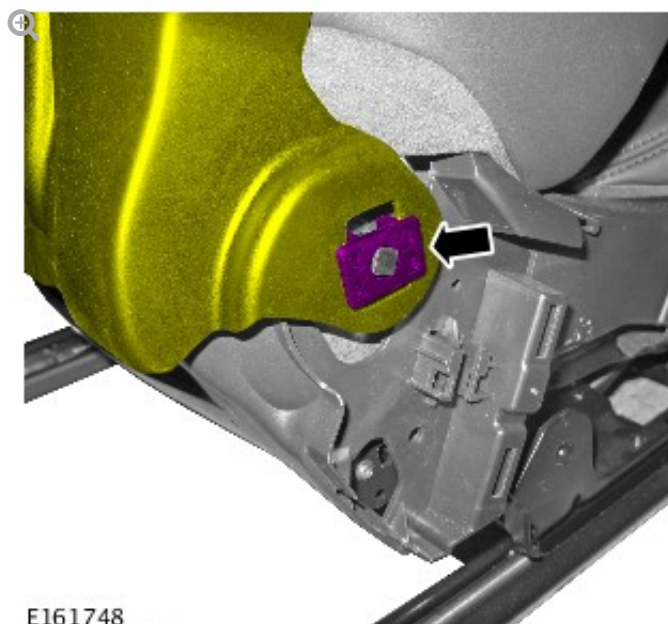

11.

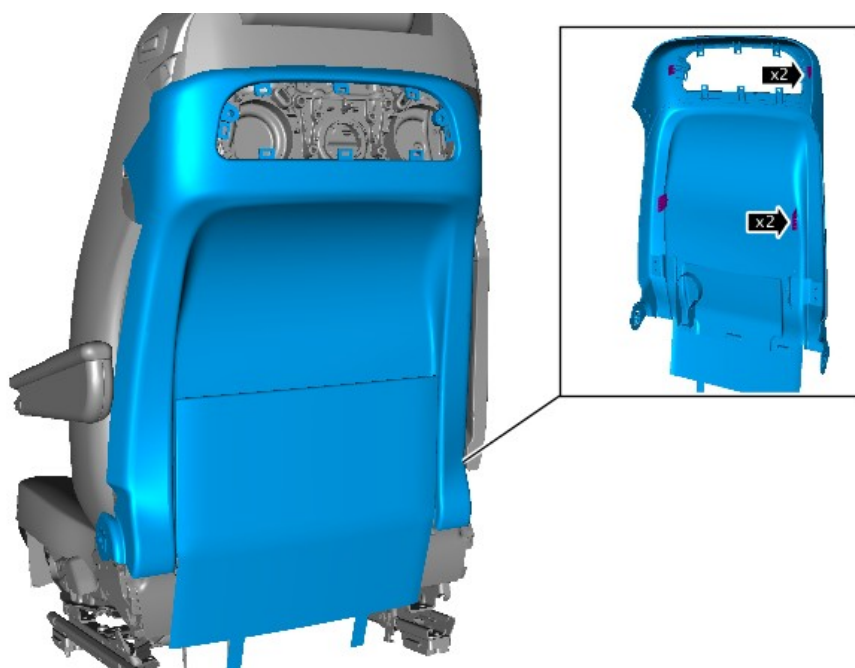


12.

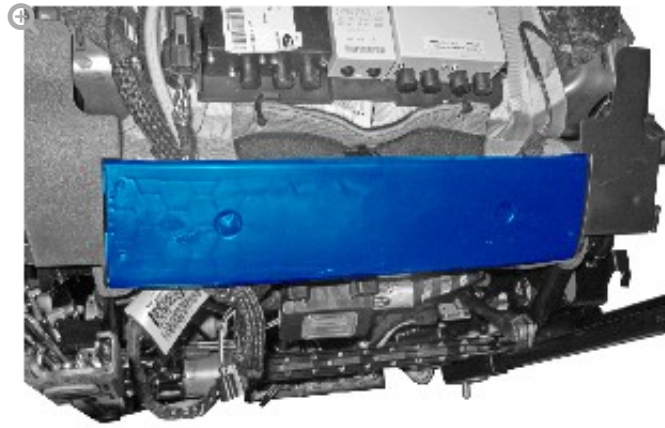


E161788

13.

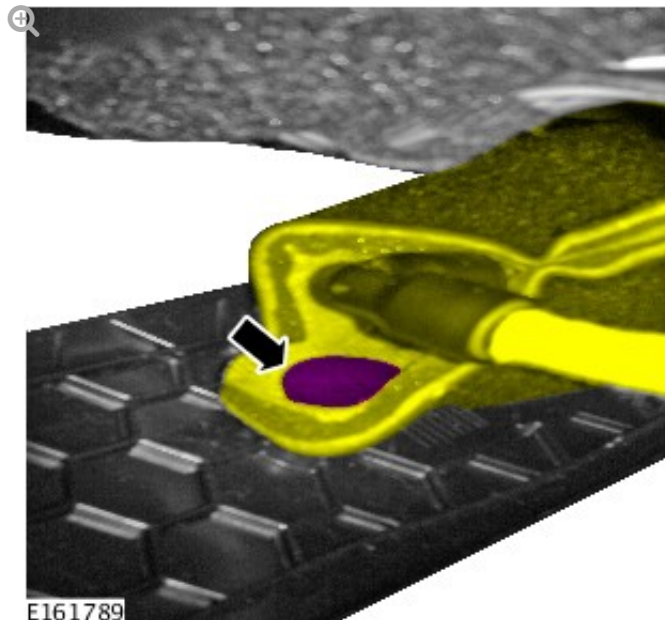


E161789

14.

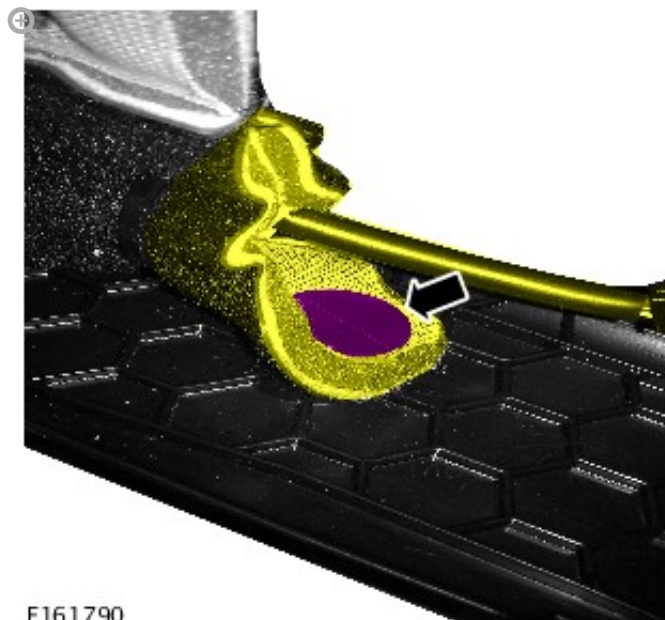


E161790

15.

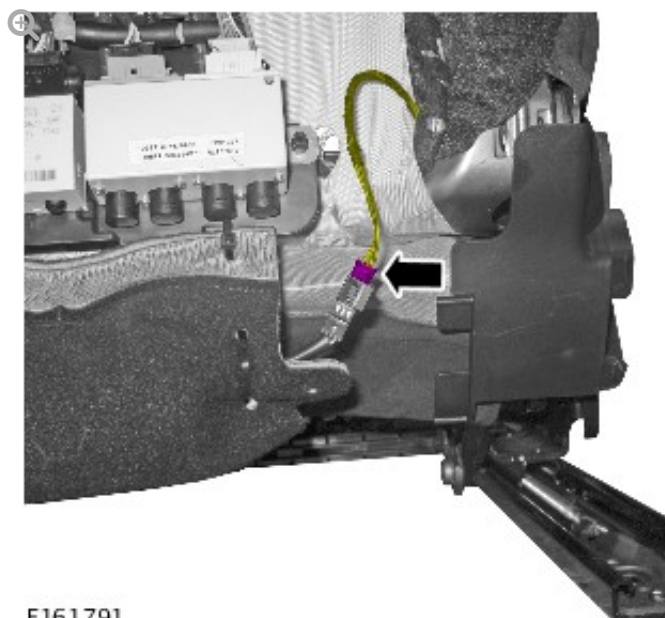


E161791


16.

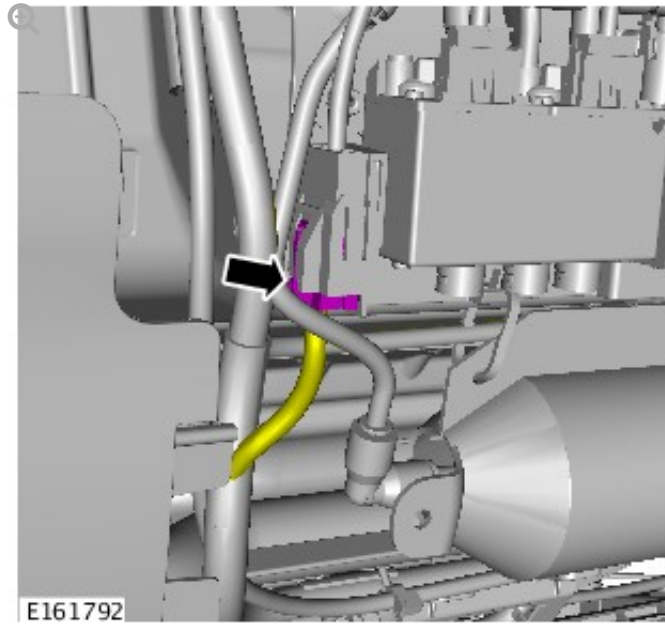


17.

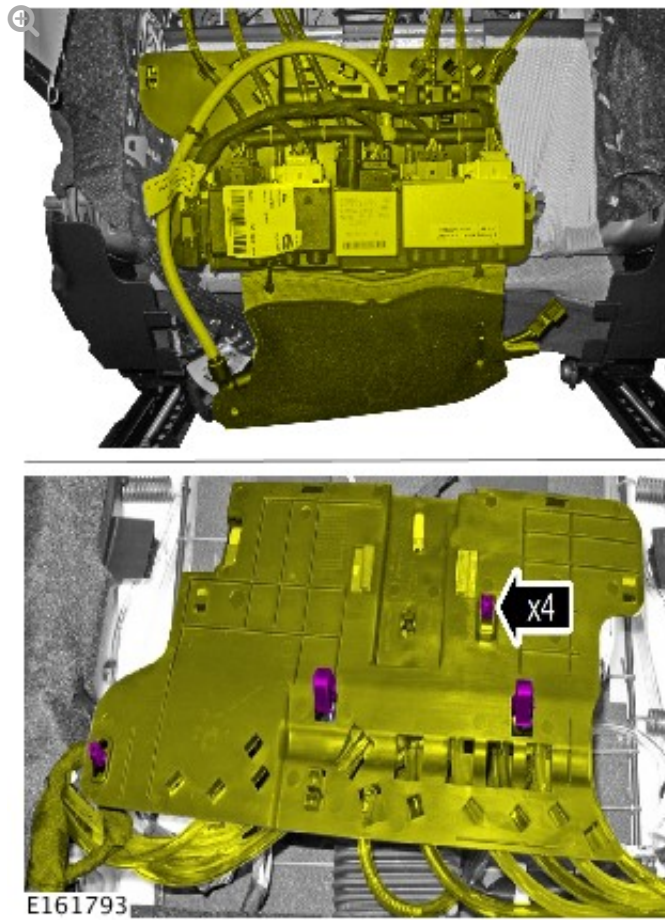


18.

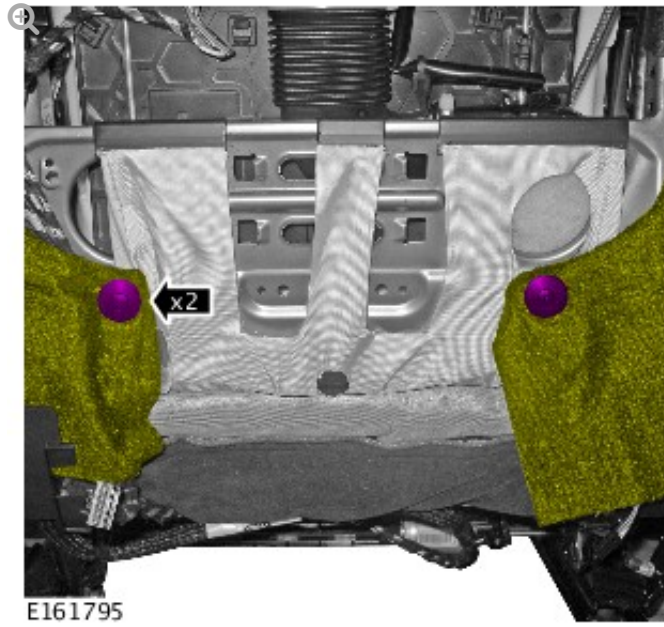

19.

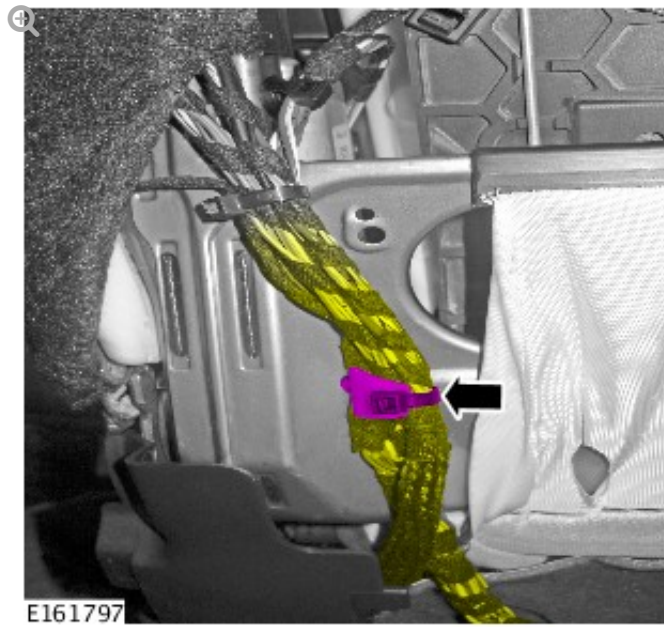


20.

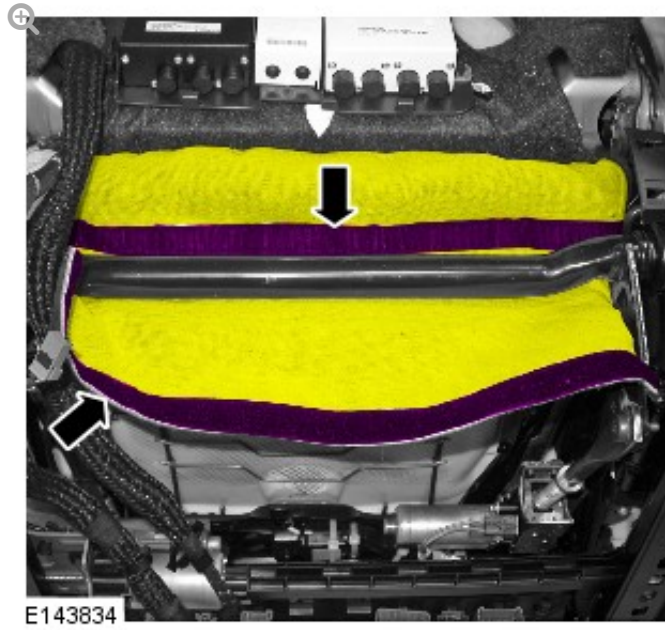

21.




22.

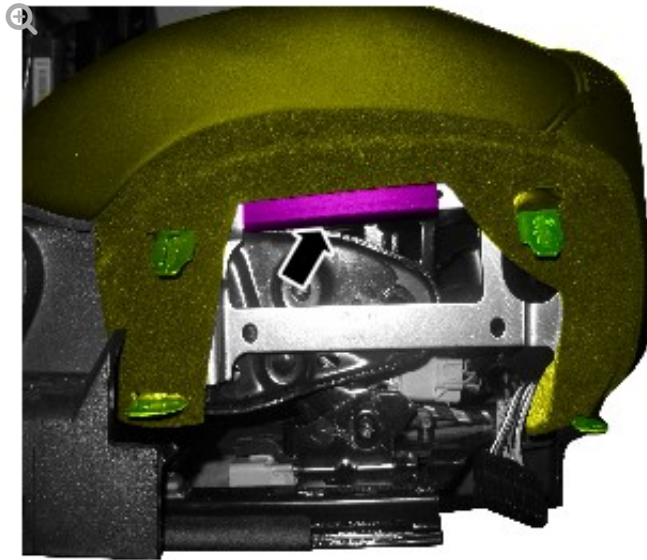


E161883

23.

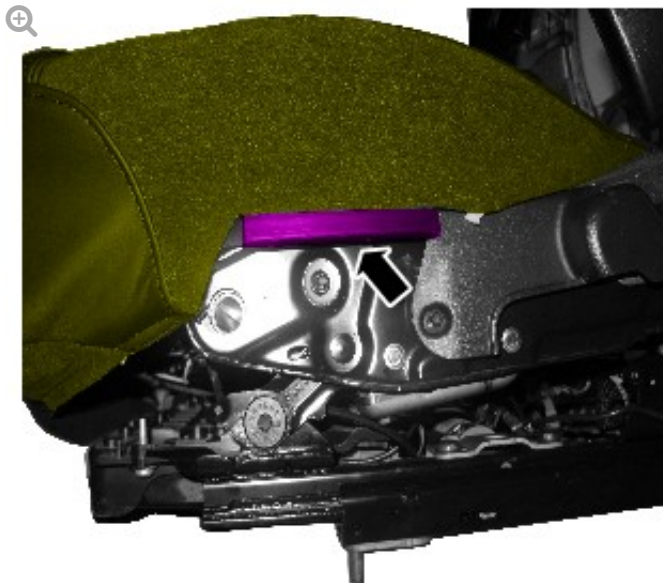


E161887

24.

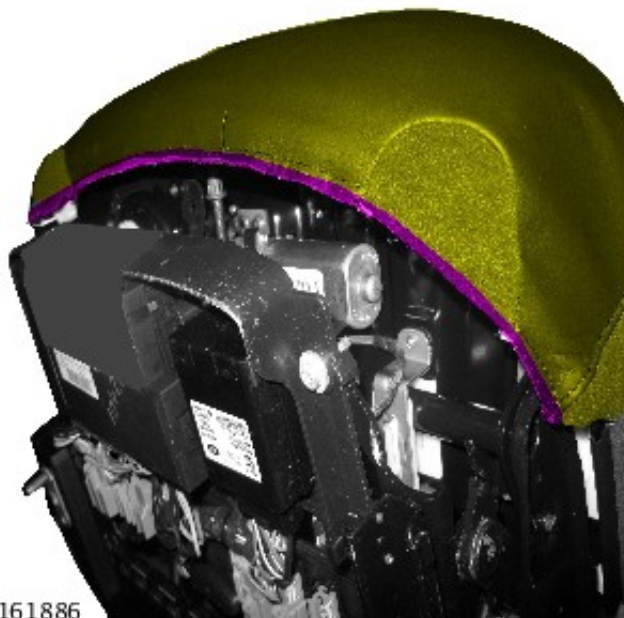

E161886

25.

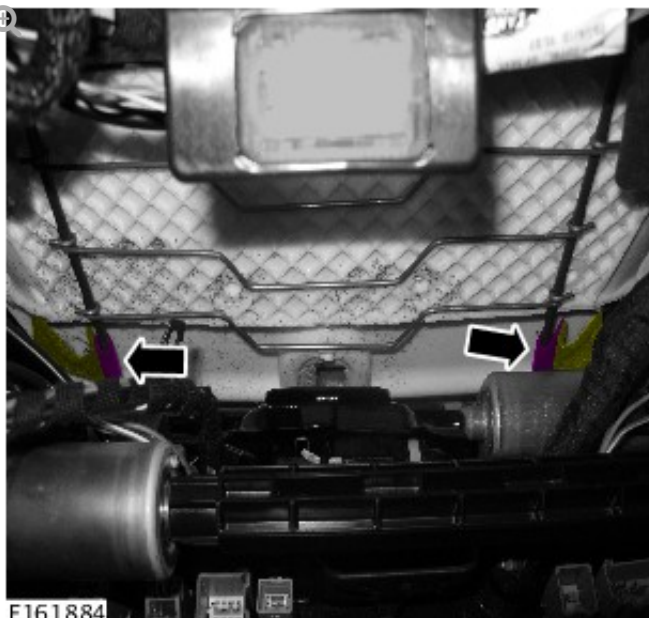


E161884


26.



27.

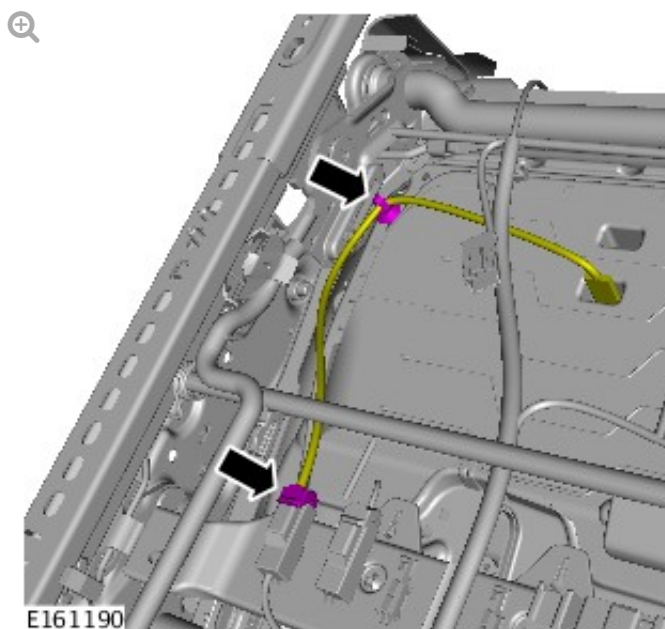

28.

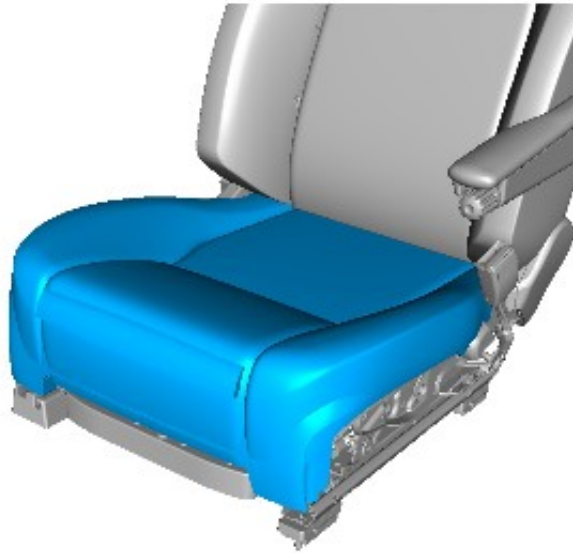


E144167

29.



E161896

30.

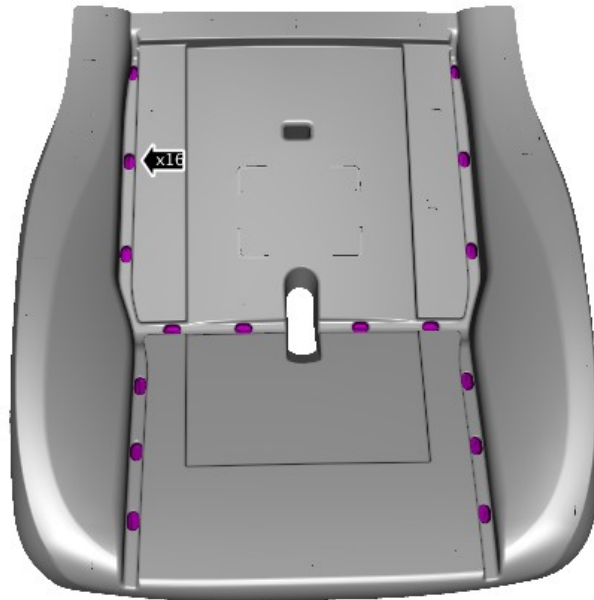

E161890

31.




E161895

INSTALLATION

1.


NOTES:

- Make sure that new hog rings are installed.
- Use hog ring pliers to close the hog rings. Do not use any other tool. The hog rings must be closed to overlap as illustrated.

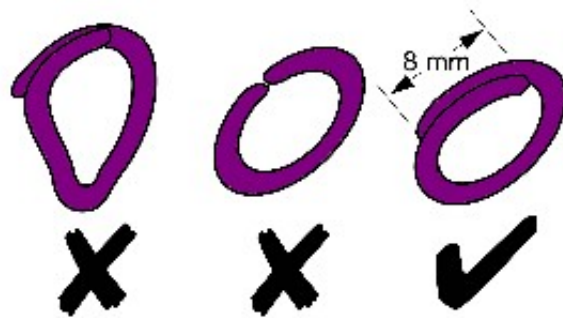

V4001063

2.

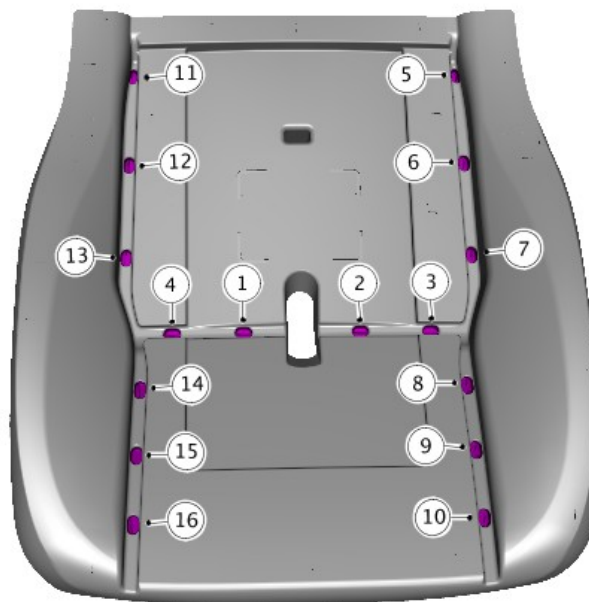

E161891

3. To install, reverse the removal procedure.

