

2016.0 RANGE ROVER (LG), 501-10

SEATING - LONG WHEEL BASE

REAR SEAT BACKREST COVER - VEHICLES WITHOUT: REAR BUSINESS SEATS [G1521634]

REMOVAL AND INSTALLATION

REMOVAL


NOTE:

Removal steps in this procedure may contain installation details.




All vehicles

1.

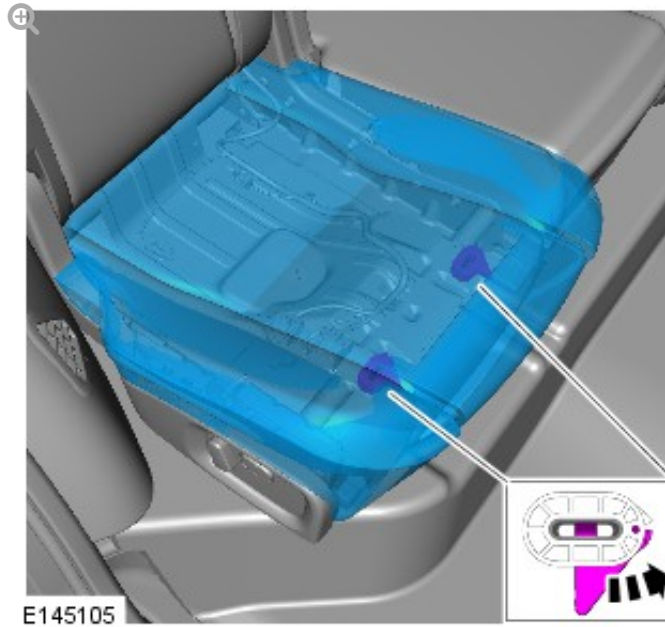


Vehicles with heated rear seat

2.

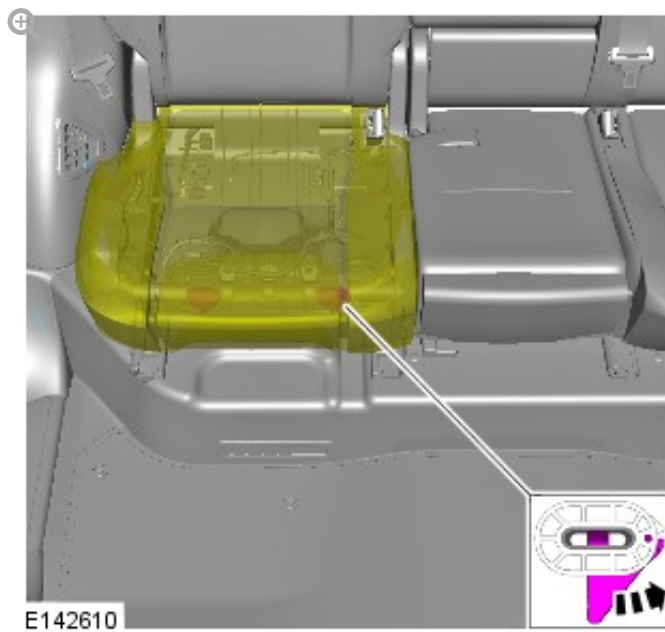


3.

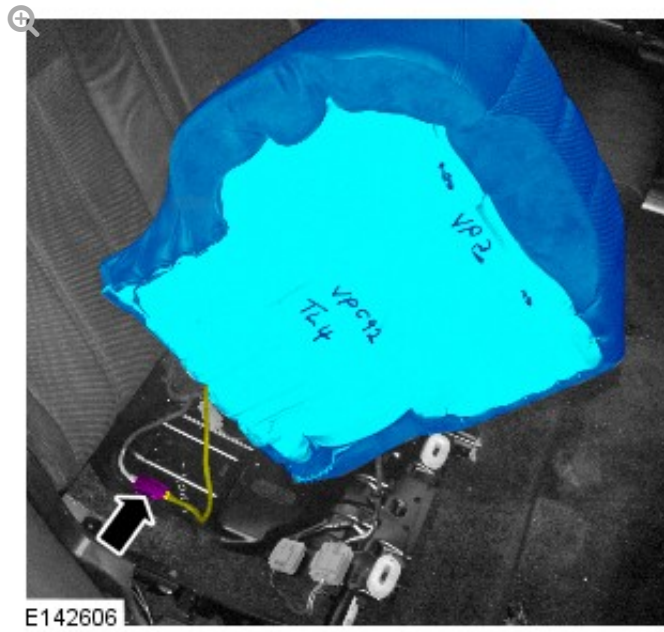


All vehicles

4.

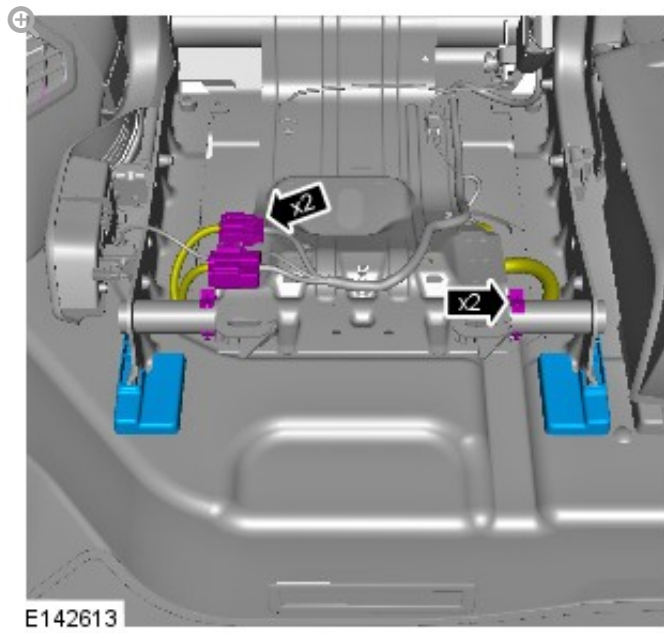


5.

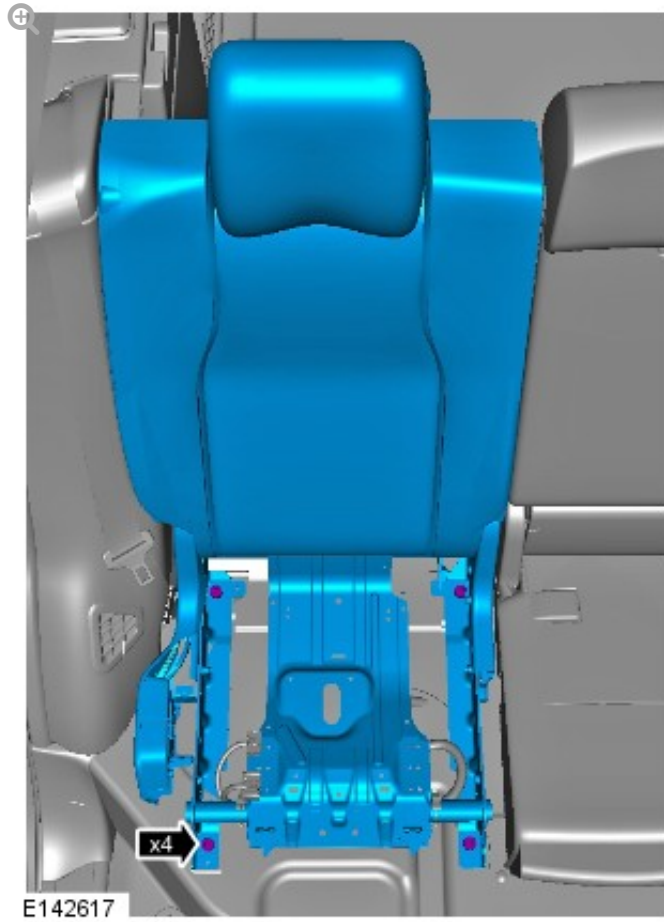


Torque: 50 Nm

6.

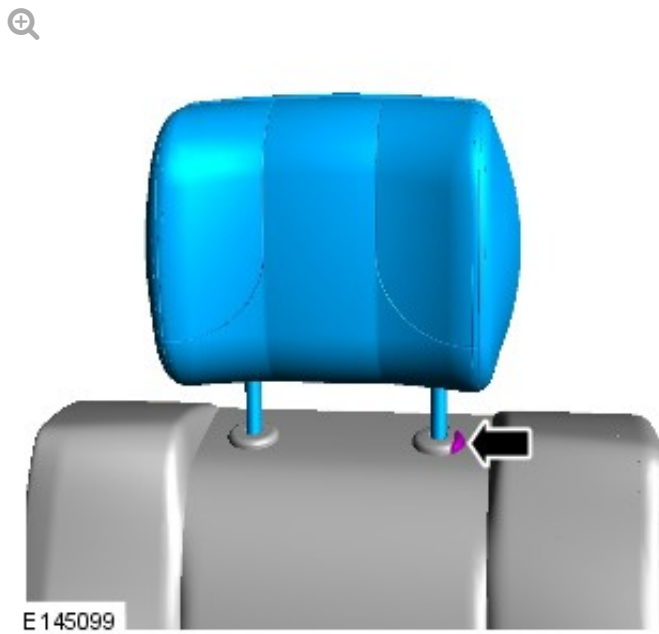

7.

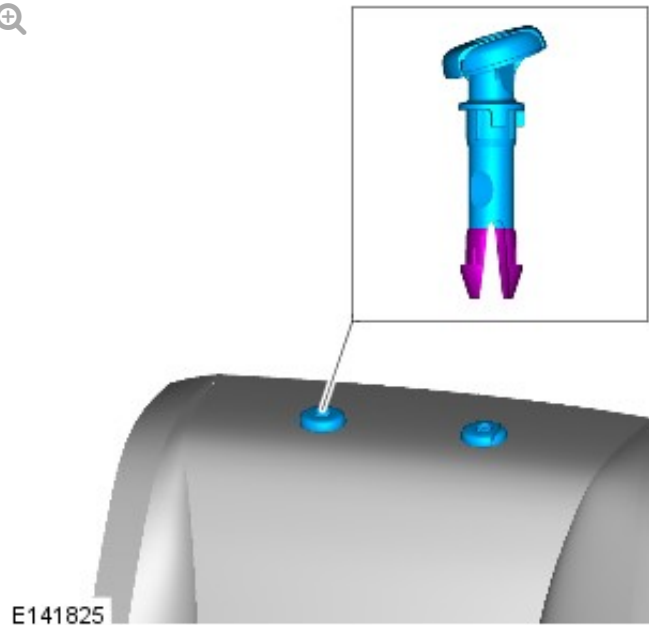


E141825

8.

NOTE:

LH shown.

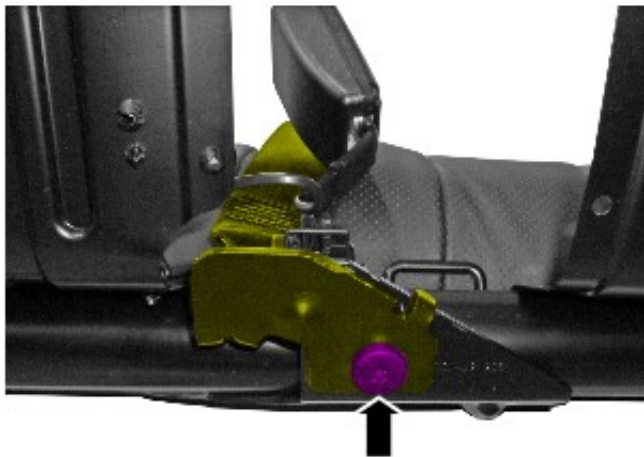

E145160

Torque: 45 Nm

9.


NOTE:

LH shown.



E145161

10.

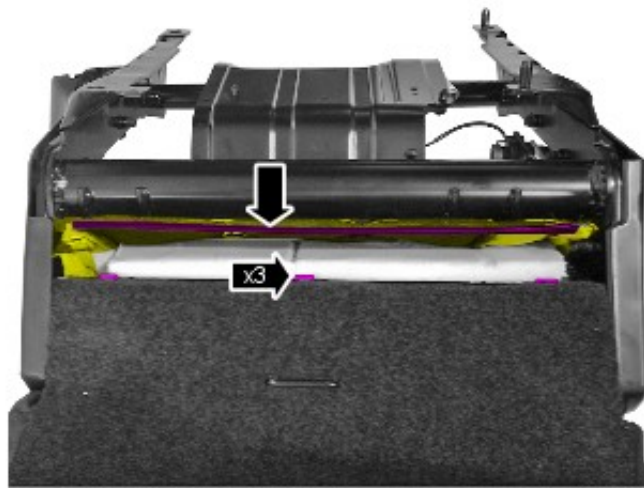

E145095

11.




E145094




Vehicles with heated rear seat

12.

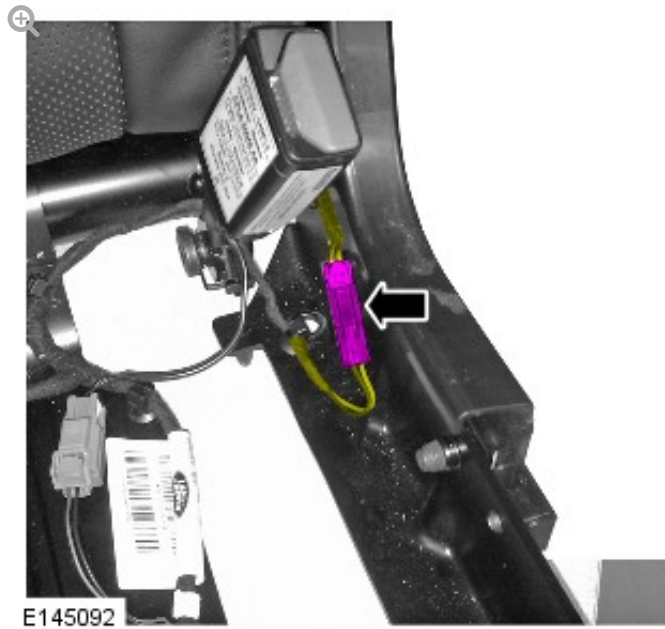

All vehicles


13.

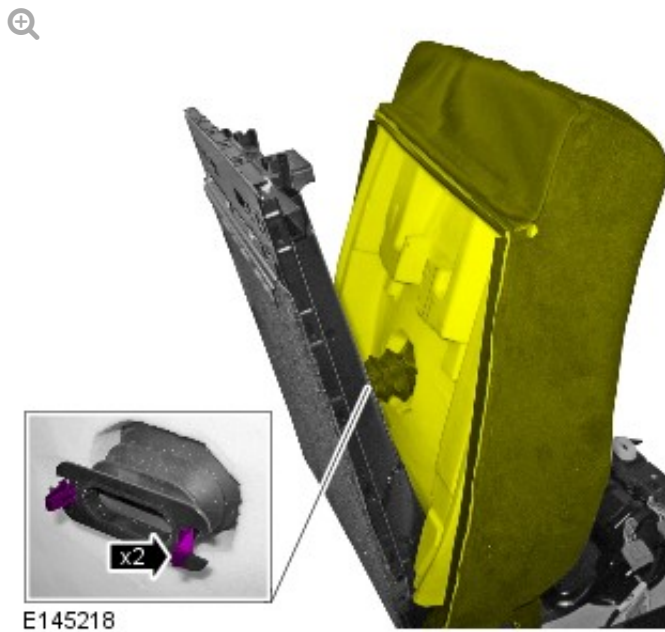


14.

NOTE:

LH shown.

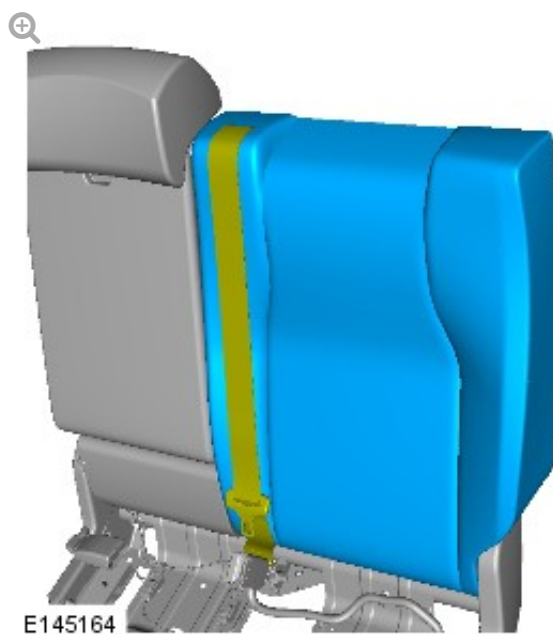

15.

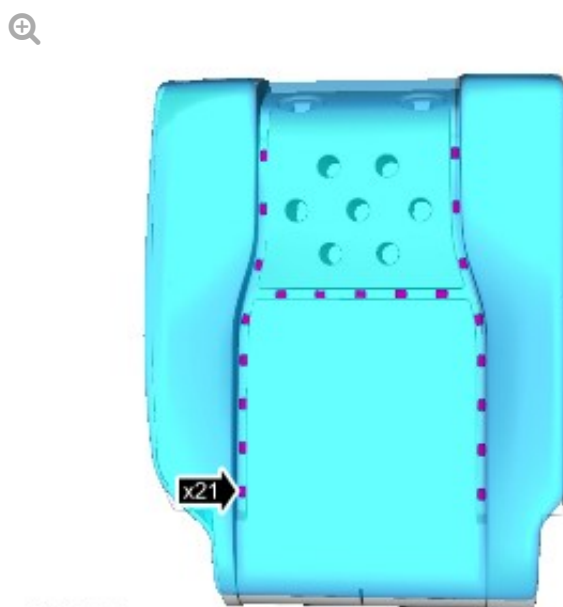


INSTALLATION

1.

NOTES:

- Make sure that new hog rings are installed.
- Use hog ring pliers to close the hog rings. Do not use any other tool. The hog rings must be closed to overlap as illustrated.

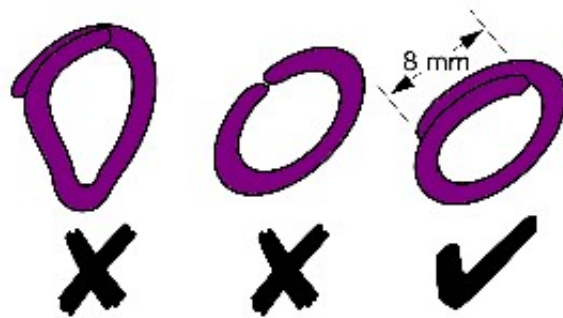


V4001063

2.

NOTES:

- RH illustration shown, LH is similar.
- Make sure that the hogrings are installed in the sequence shown.

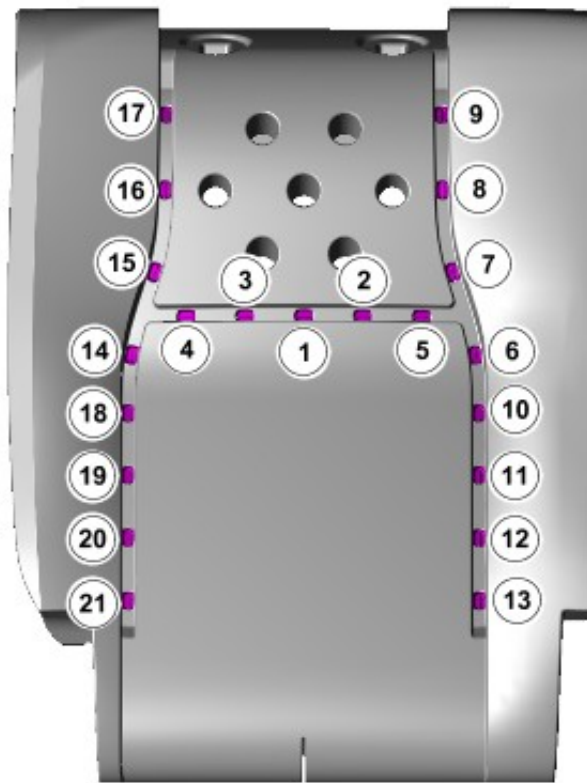

E145097

3. To install, reverse the removal procedure.