

2016.0 RANGE ROVER (LG), 501-10

SEATING - STANDARD WHEEL BASE

FRONT ROW SEAT CUSHION COVER [G1521608]

REMOVAL AND INSTALLATION

REMOVAL


NOTE:

Removal steps in this procedure may contain installation details.



All vehicles

1.


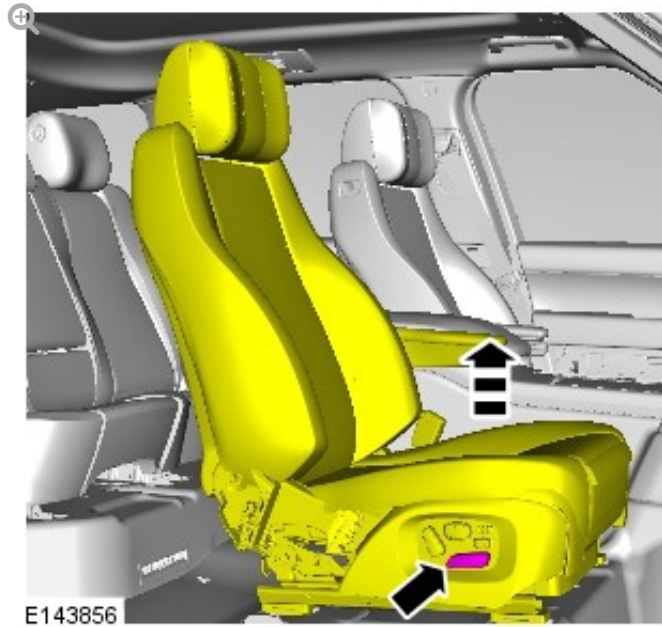


2. Refer to: Front Seat (501-10, Removal and Installation).

3.


NOTE:

Make sure that the clips are installed in the correct orientation.

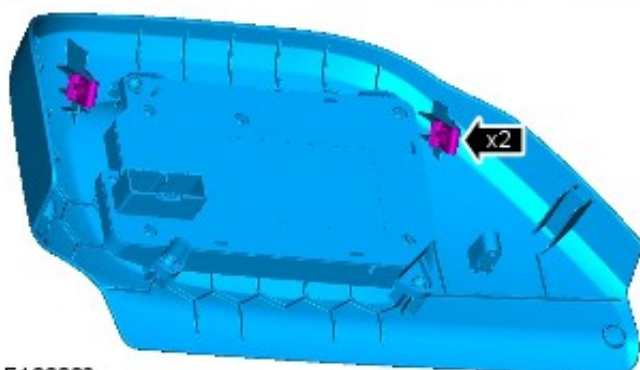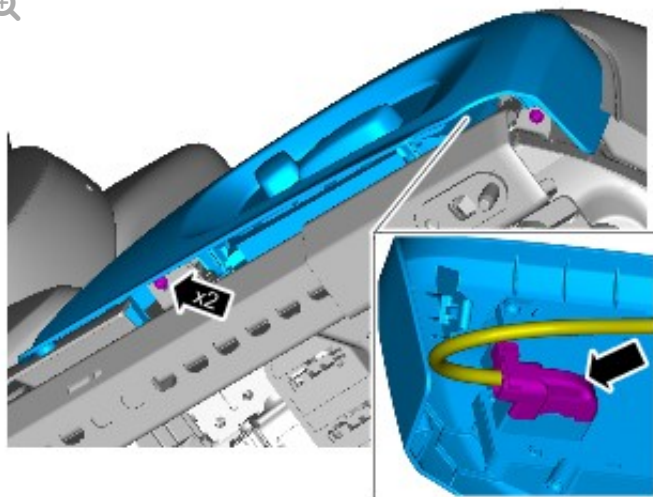

E133236

4.

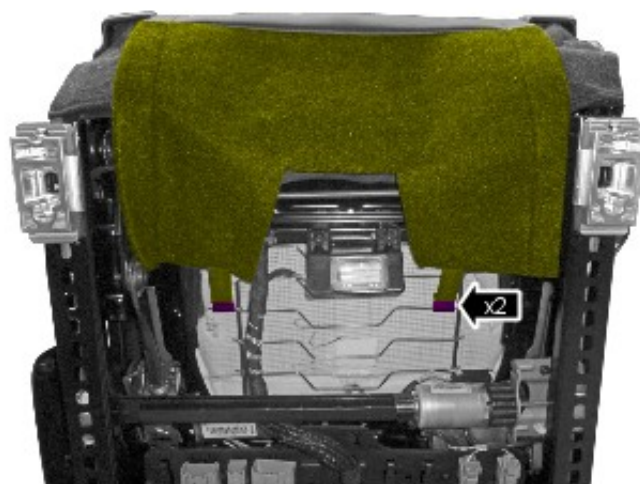


E143833


5.

NOTE:

Make sure that the clips are installed in the correct orientation.

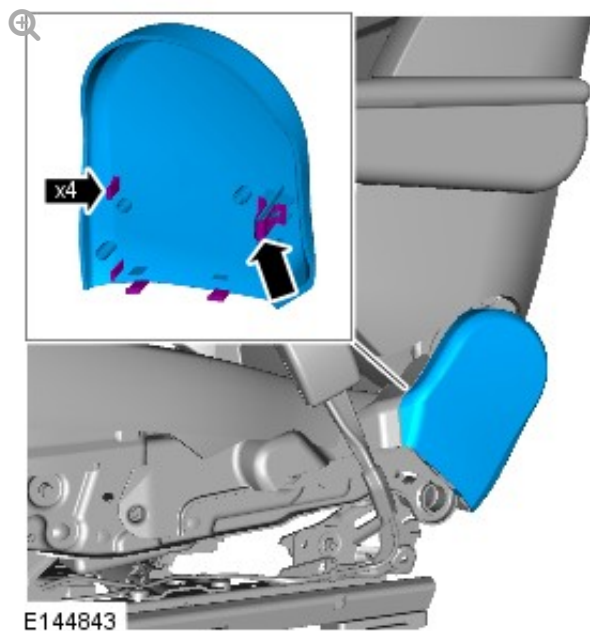


6.

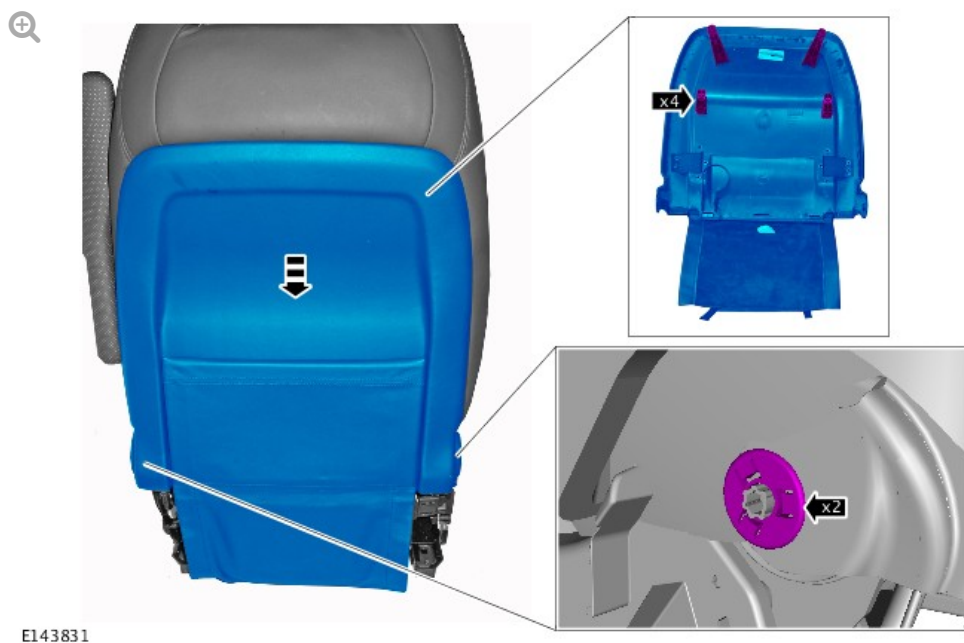

Vehicles with heated front seats

7.

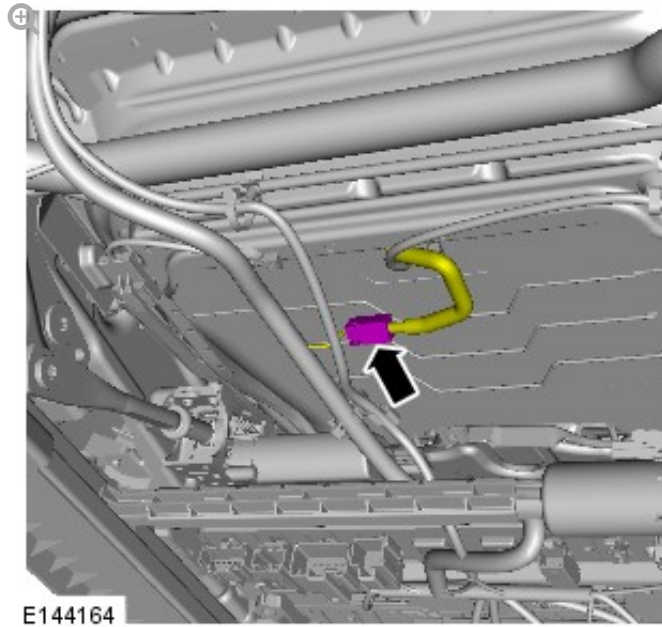


All vehicles


8.

CAUTION:

Make sure the component is aligned as shown.

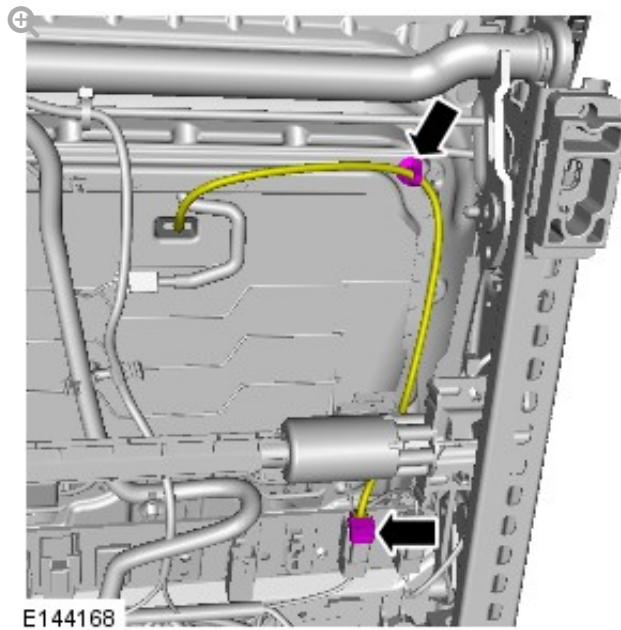


9.

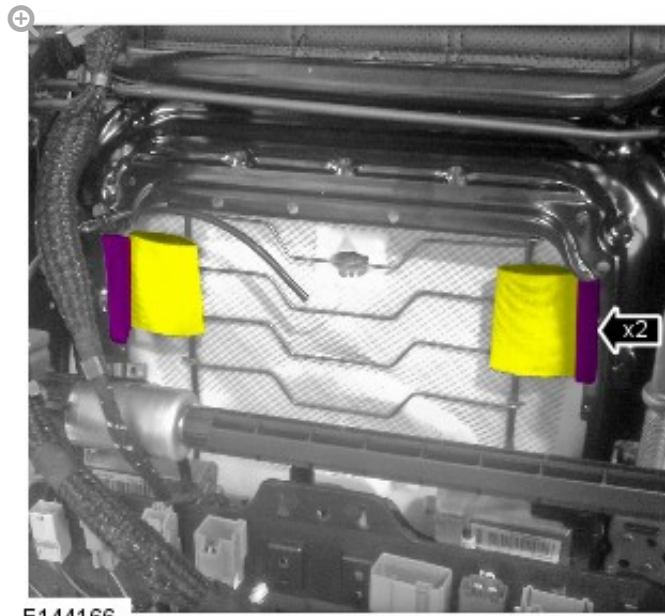


E144166

10.

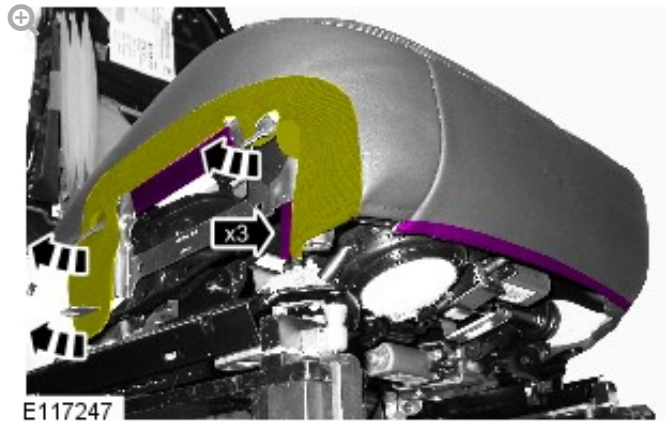


E117247

11.

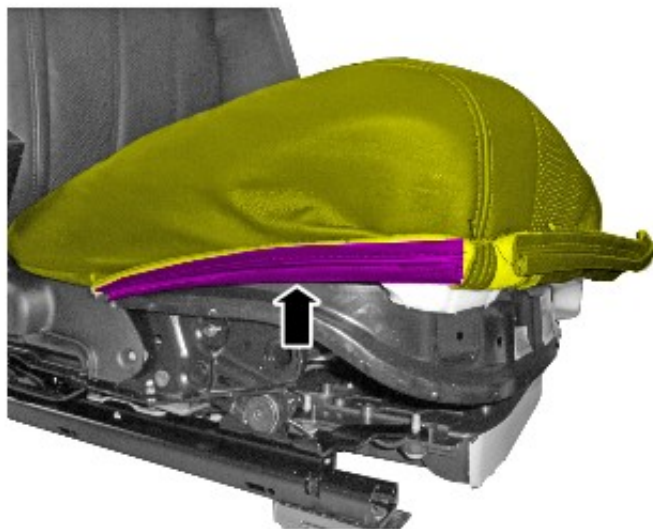


E145328

12.

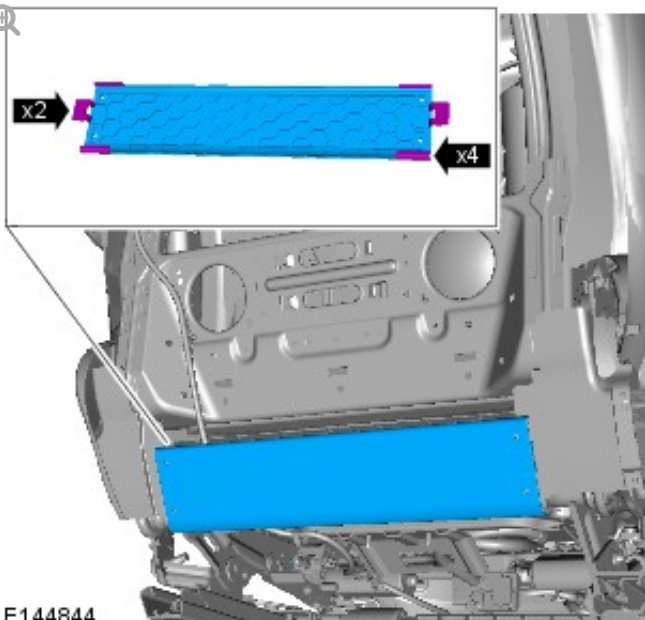


E144844


13.

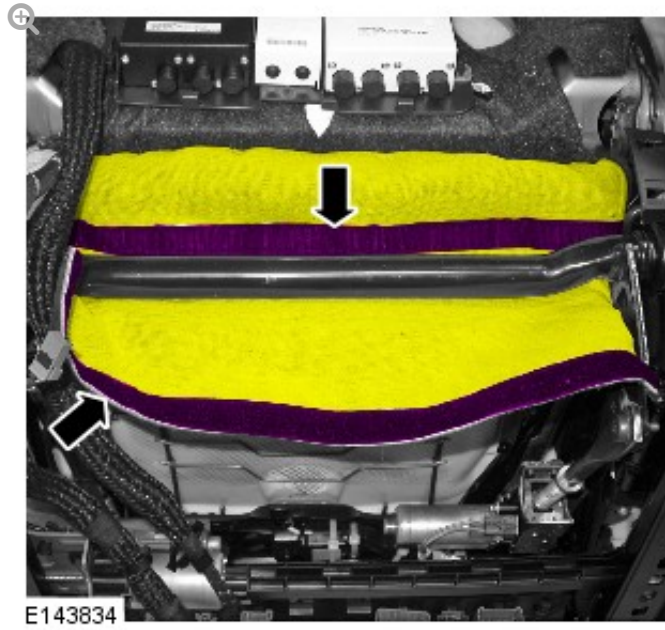

14.

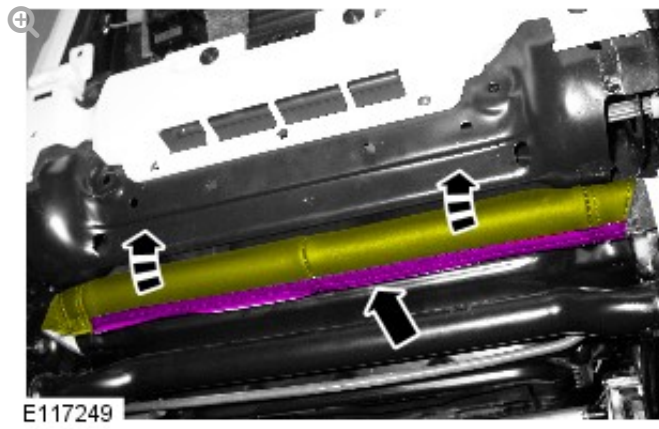

15.

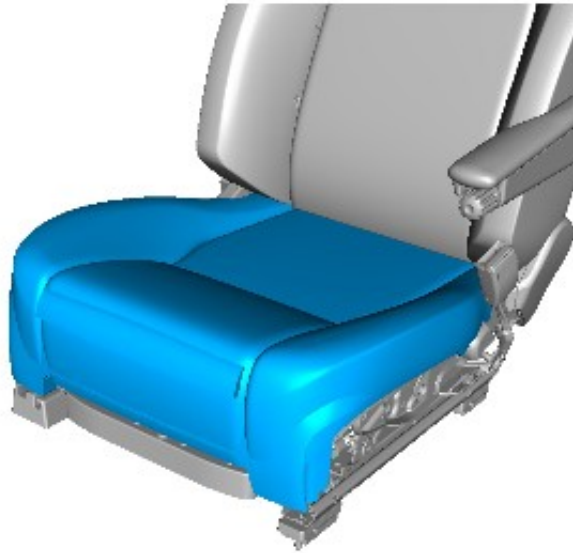


E144167

16.

NOTE:

Make sure that new hog rings are installed.

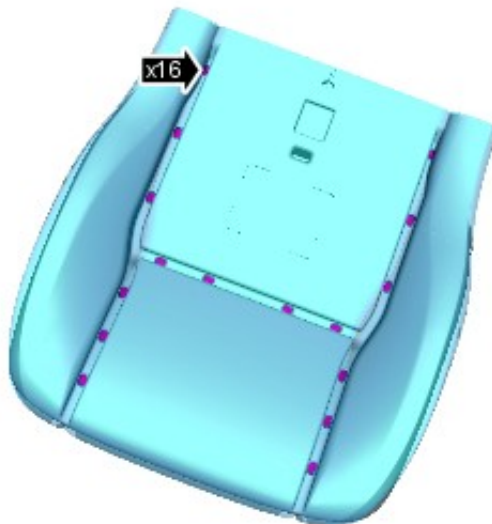


E144163

INSTALLATION

1.

NOTES:

- Make sure that new hog rings are installed.
- Use hog ring pliers to close the hog rings. Do not use any other tool. The hog rings must be closed to overlap as illustrated.

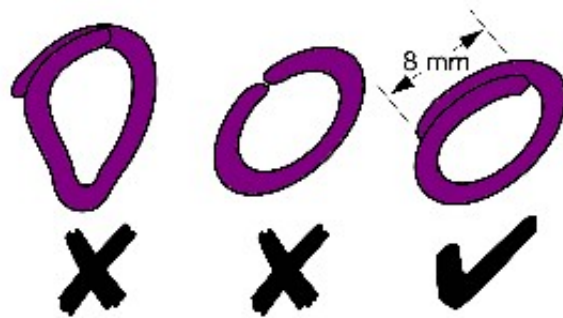


V4001063

2.

NOTE:

Make sure that the hogrings are installed in the sequence shown.

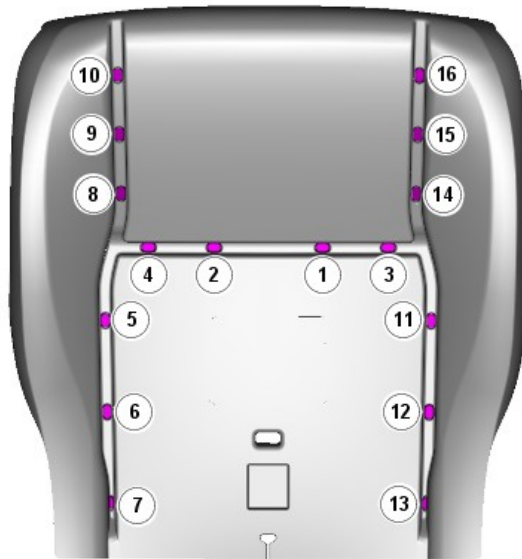

E145733

3. To install, reverse the removal procedure.