

2016.0 RANGE ROVER (LG), 501-10

SEATING - STANDARD WHEEL BASE

REAR SEAT BACKREST COVER - VEHICLES WITH: REAR BUSINESS SEATS (G1535557)

REMOVAL AND INSTALLATION


REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1. Refer to: Rear Seat Head Restraint - Vehicles With: Rear Business Seats (501-10, Removal and Installation).

2.

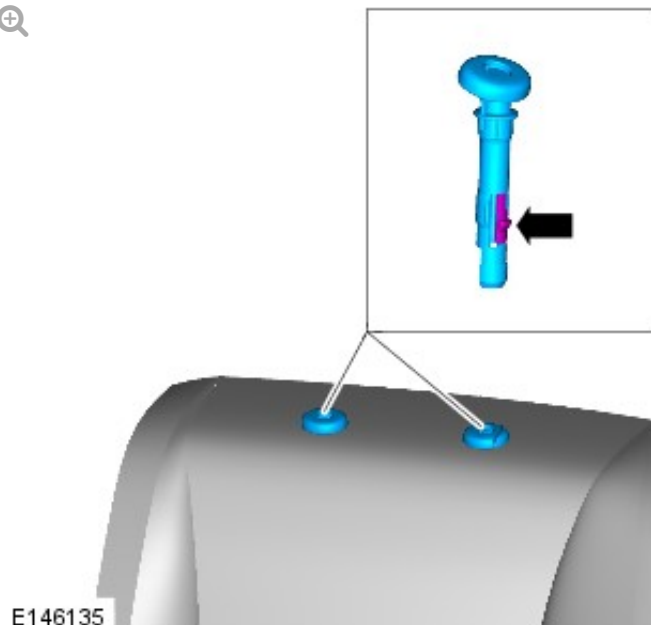


E146135

3.


NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.

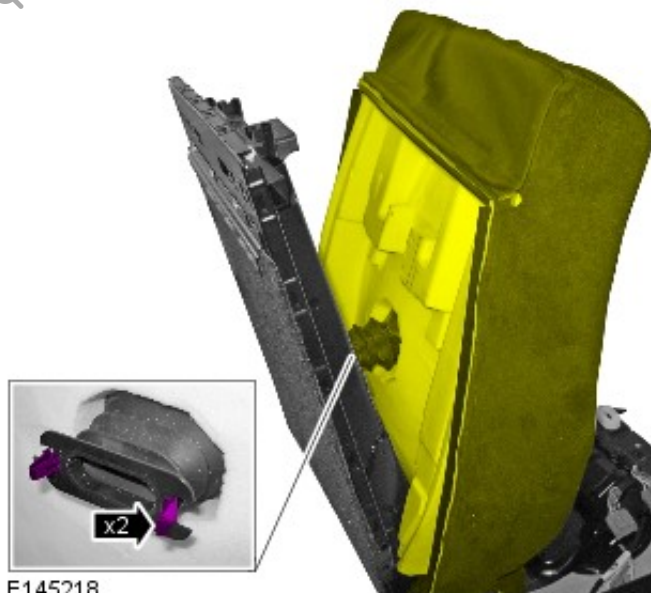


E145218

4.

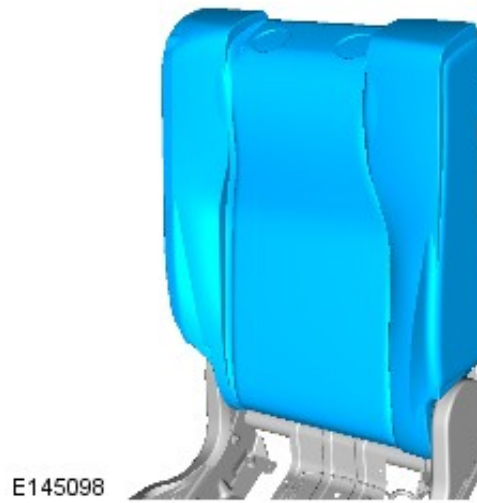

5.

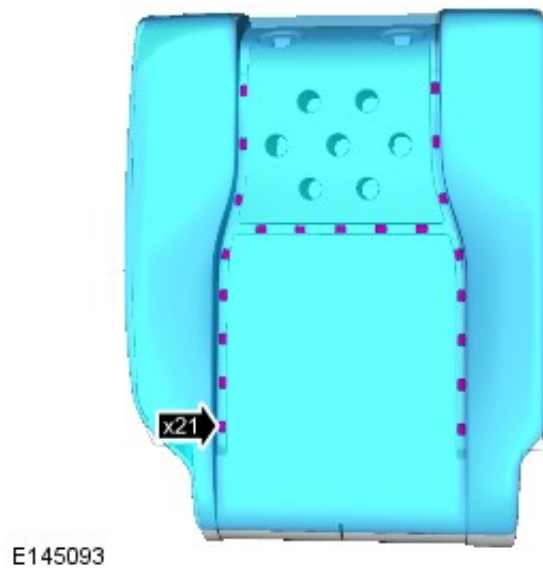


INSTALLATION

1.

NOTES:

- Make sure that new hog rings are installed.
- Use hog ring pliers to close the hog rings. Do not use any other tool. The hog rings must be closed to overlap as illustrated.

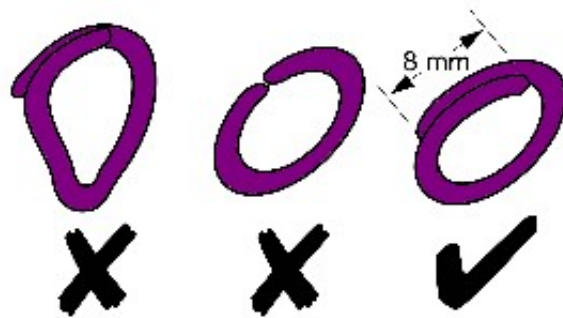


V4001063

2.

NOTES:

- Make sure that the hogrings are installed in the sequence shown.
- RH illustration shown, LH is similar.

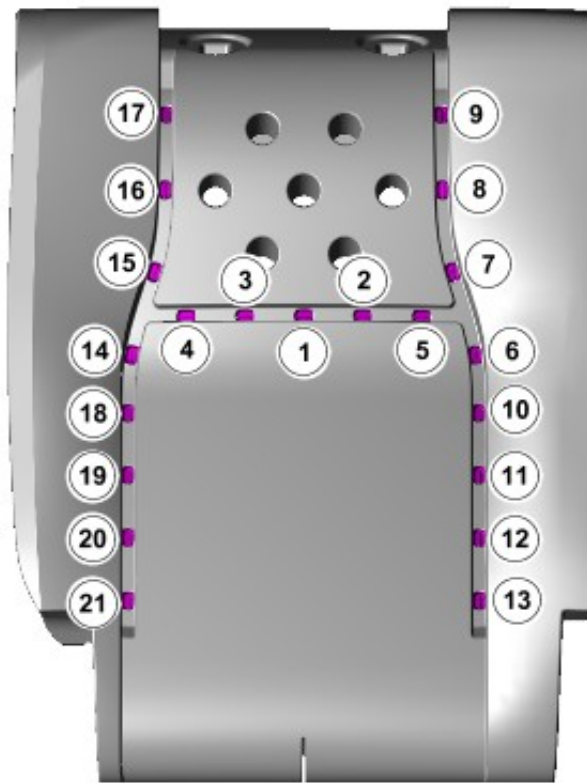

E145097

3. To install, reverse the removal procedure.