

2016.0 RANGE ROVER (LG), 501-16

WIPERS AND WASHERS

WINDSHIELD WASHER RESERVOIR (G1521851)

REMOVAL AND INSTALLATION

REMOVAL

WARNING:

Be prepared to collect escaping fluid.

NOTE:

Removal steps in this procedure may contain installation details.



All vehicles

1. Remove the battery ground cable.
Refer to: [Specifications](#) (414-00 Battery and Charging System - General Information, Specifications).

2.

WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

3. Refer to: [Fender Splash Shield](#) (501-02 Front End Body Panels, Removal and Installation).




Cold climate vehicles

4.

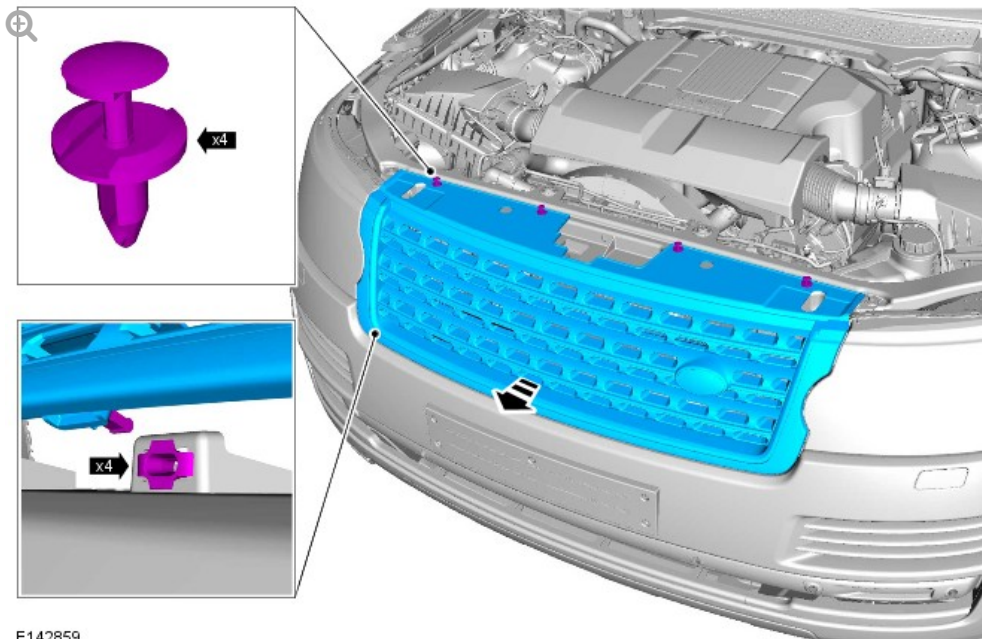


E142859

5.

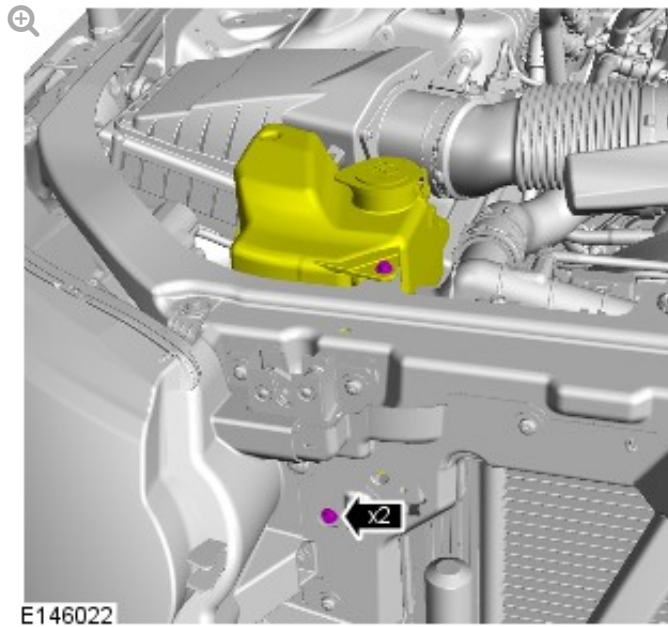


Torque: 7 Nm

6.

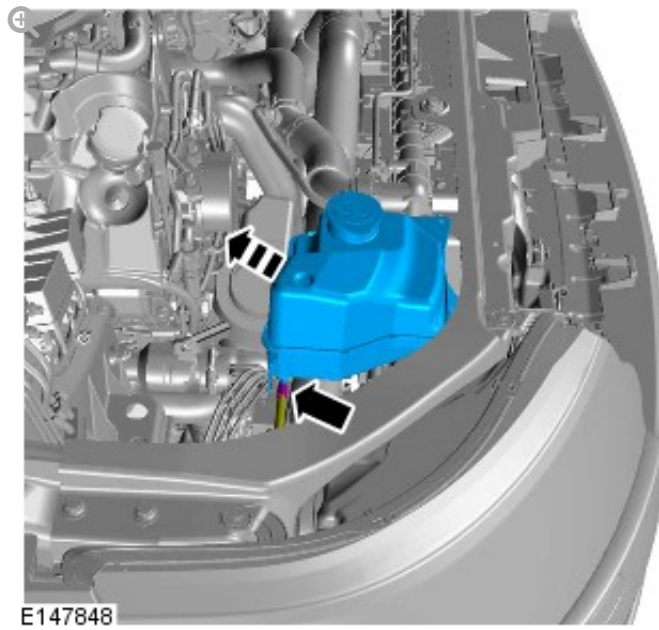


All vehicles

7.

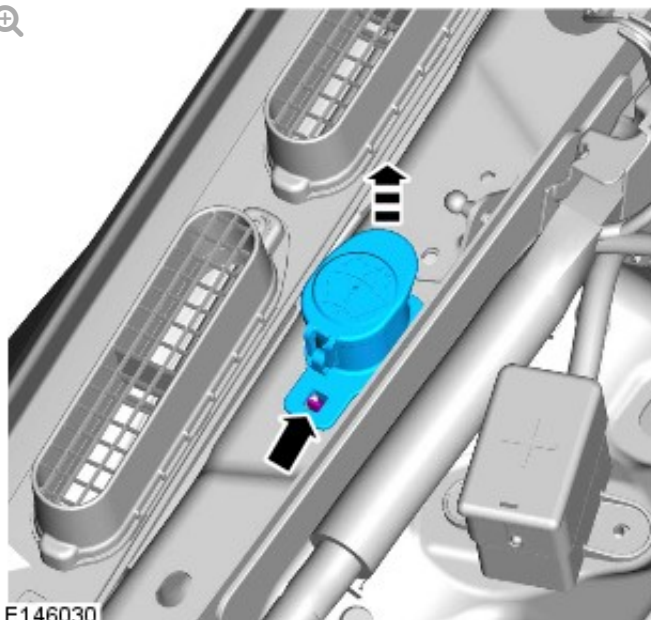


8.

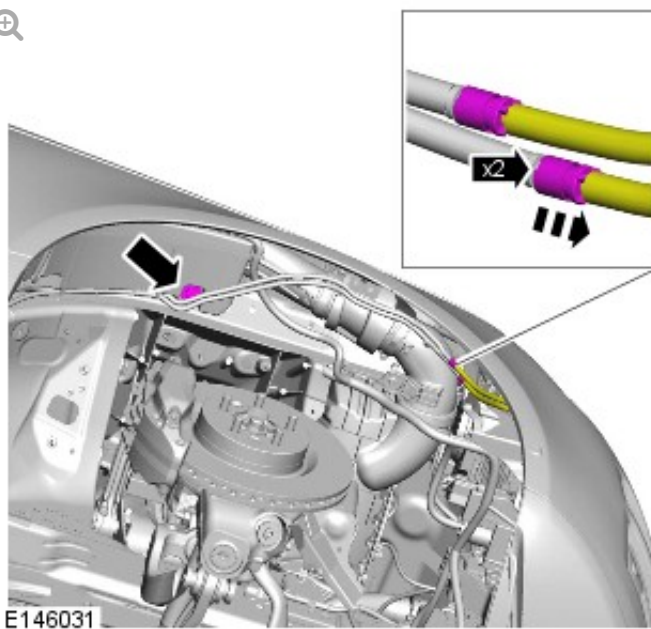


Torque: 4.1 Nm

9.

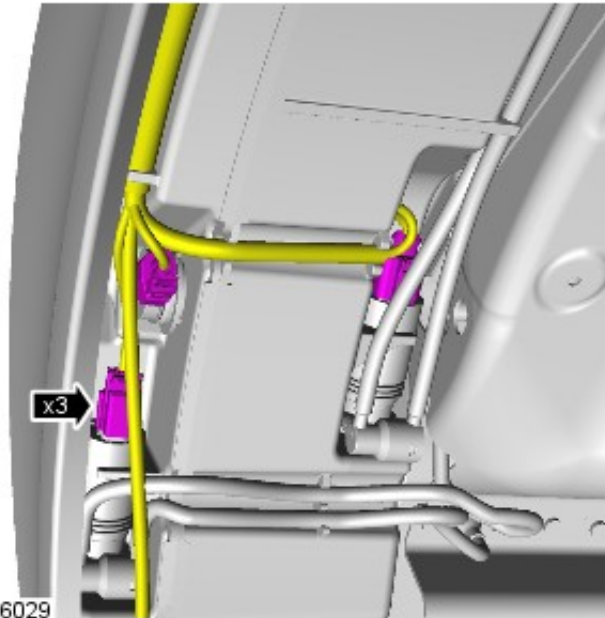


E146029

10.

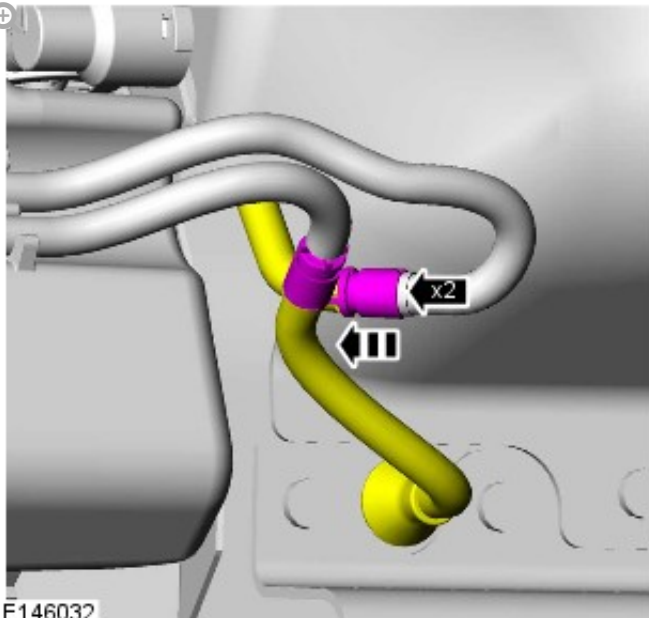

E146032

11.

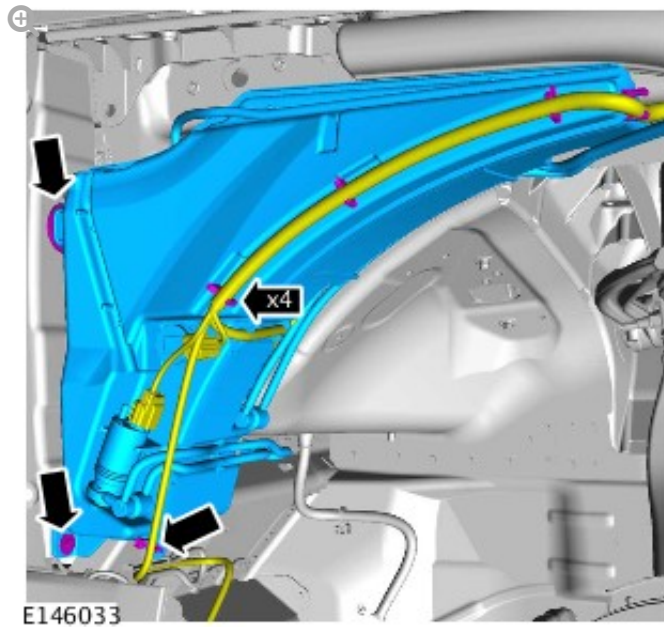


Torque: 4.1 Nm

12.


NOTE:

Do not disassemble further if the component is removed for access only.

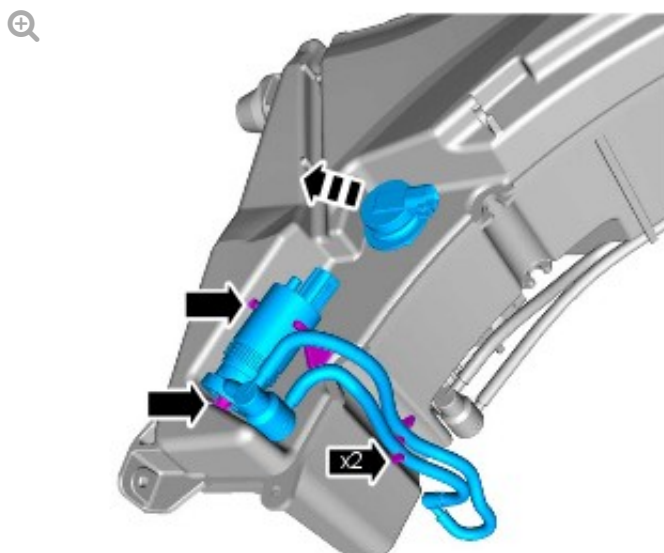

E146689

13.

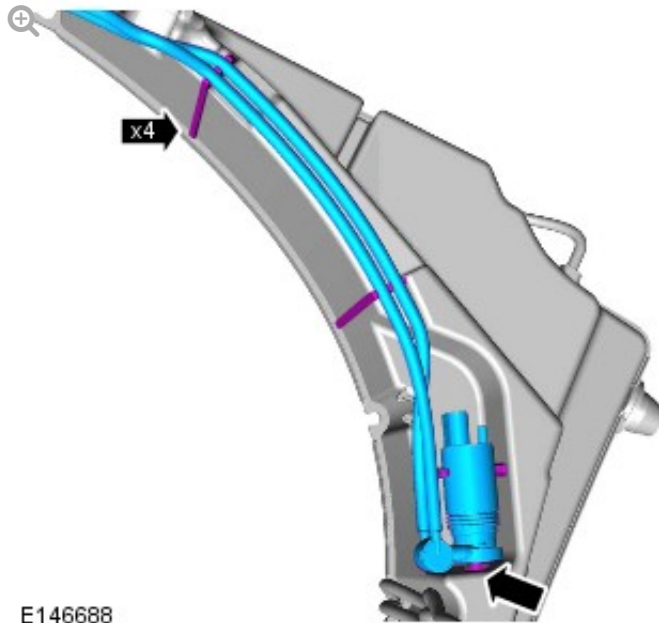

INSTALLATION



All vehicles

1.

CAUTION:


The seals are to be reused unless damaged.

To install reverse the removal procedure.




Cold climate vehicles

2.

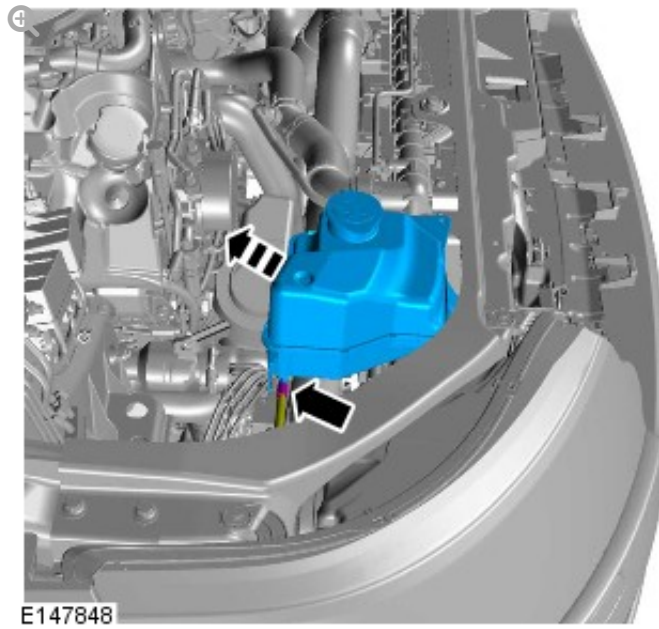


3.

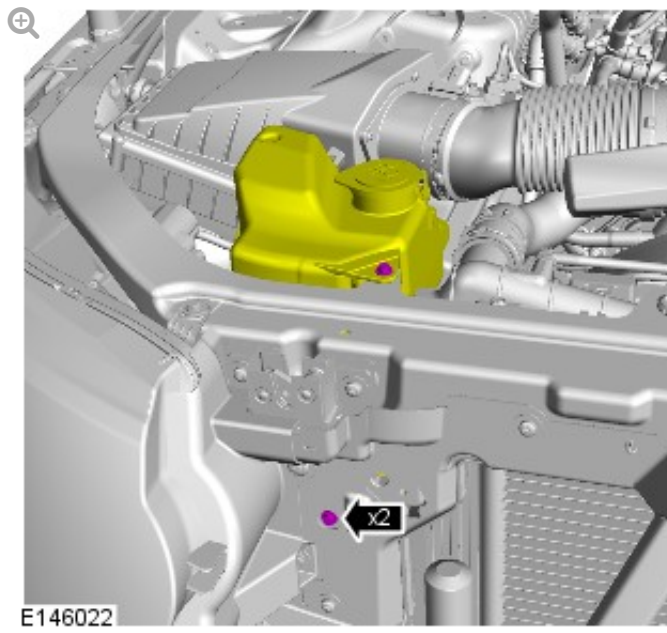

Torque: 7 Nm

4.

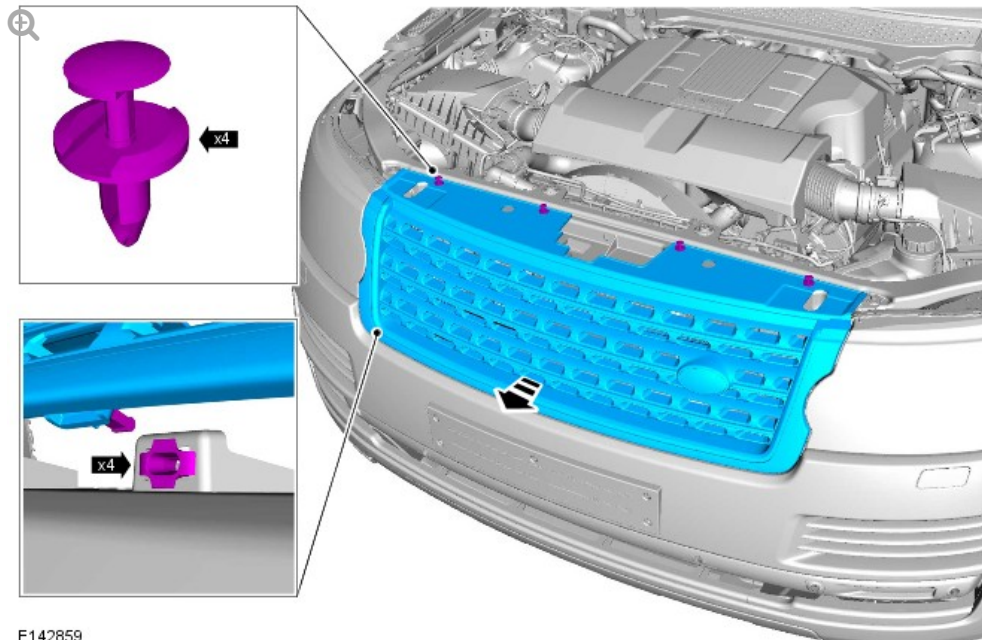

E142859