

2016.0 RANGE ROVER (LG), 205-02

REAR DRIVE AXLE/DIFFERENTIAL

DIFFERENTIAL DRAINING AND FILLING (G1508992)

GENERAL PROCEDURES

51.25.02	REAR AXLE - DRAIN AND REFILL	ALL DERIVATIVES	0.3	USED WITHINS
----------	------------------------------------	--------------------	-----	--------------

NOTES:

- Some variation in the illustrations may occur, but the essential information is always correct.
- Electric rear differential shown. Open rear differential similar.
- Removal steps in this procedure may contain installation details.
- Some components shown removed for clarity.

1.

WARNING:


Do not work on or under a vehicle supported only by a jack.
Always support the vehicle on safety stands.

Raise and support the vehicle.

2.

NOTE:

Discard the sealing plug.

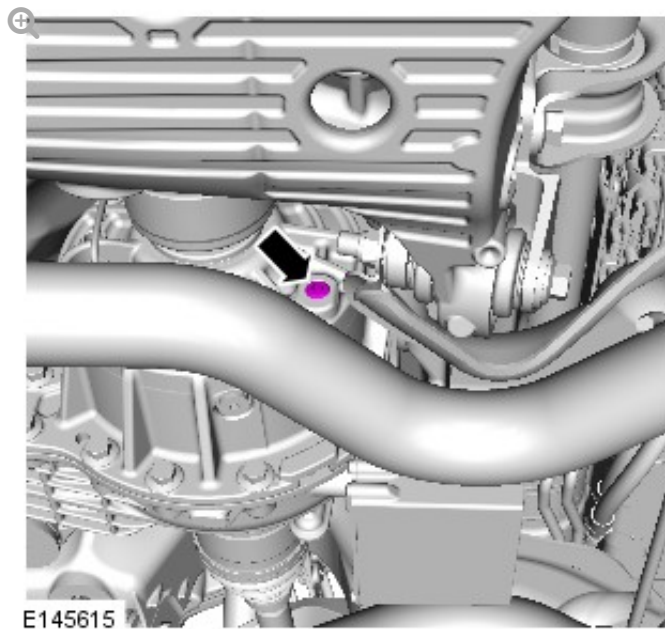


- Clean the area around the fluid filler plug.
- Position a container to collect spillage.

3.

NOTE:

Discard the sealing plug.

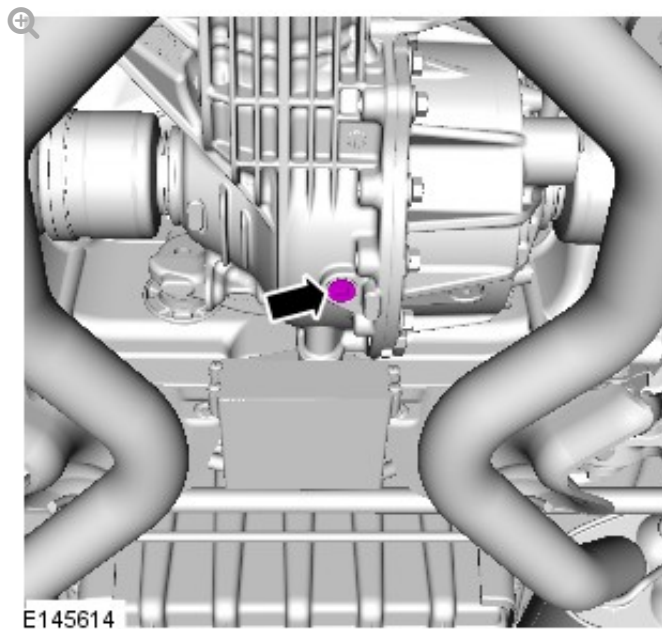


Drain the differential fluid.

- Clean the area around the fluid drain plug.

4.

NOTE:

Install a new sealing plug.

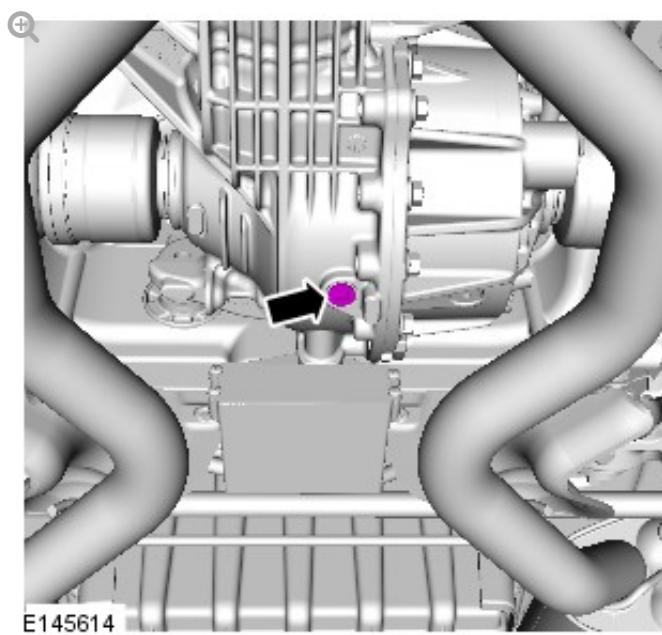


TORQUE: 30 Nm

5. Fill the rear differential, until a thin thread of fluid runs from the filler hole.

6.

NOTE:

Install a new sealing plug.

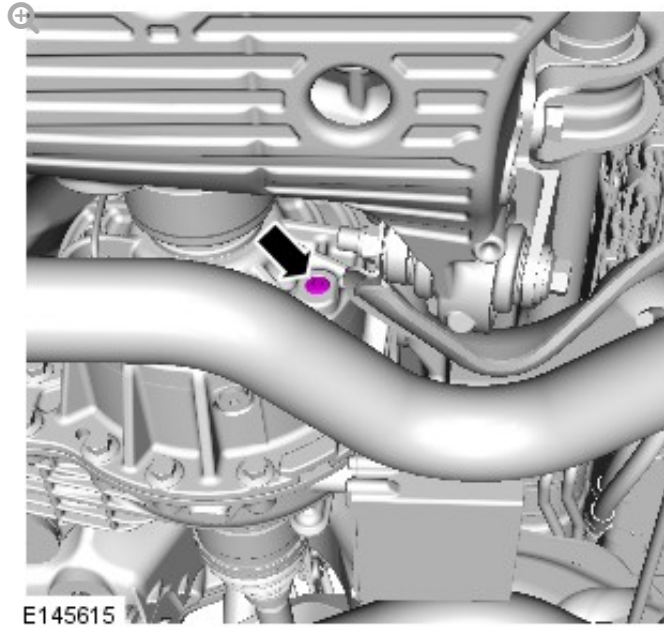

TORQUE: 30 Nm