

PUBLISHED: 04-AUG-2012  
2014.0 RANGE ROVER (LG), 204-06

RIDE AND HANDLING OPTIMIZATION

**FLUID PUMP - V8 N/A 5.0L PETROL/V8  
S/C 5.0L PETROL** (G1551265)

## REMOVAL AND INSTALLATION

|          |                                                            |                                    |     |                 |
|----------|------------------------------------------------------------|------------------------------------|-----|-----------------|
| 60.60.10 | PUMP - ACTIVE<br>CORNERING<br>ENHANCEMENT<br>(ACE) - RENEW | 5000 CC, AJ<br>V8,<br>SUPERCHARGED | 2.2 | USED<br>WITHINS |
|----------|------------------------------------------------------------|------------------------------------|-----|-----------------|

## REMOVAL



### CAUTION:

Before disconnecting or removing components, ensure the area around the joint faces and connections are clean. Plug open connections to prevent contamination.



### NOTE:

Removal steps in this procedure may contain installation details.

1.

Disconnect the battery ground cable.  
Refer to: Specifications (414-00, Specifications).

2.



### WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


3.

Refer to: Thermostat Housing - V8 S/C 5.0L Petrol (303-03, Removal and Installation).


4.

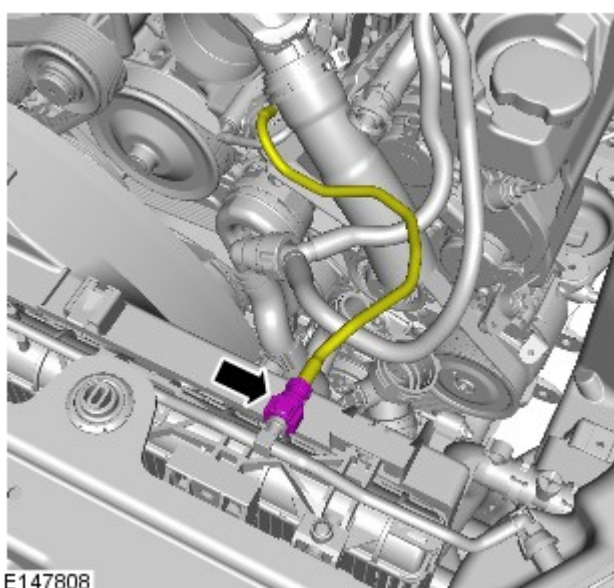

5.

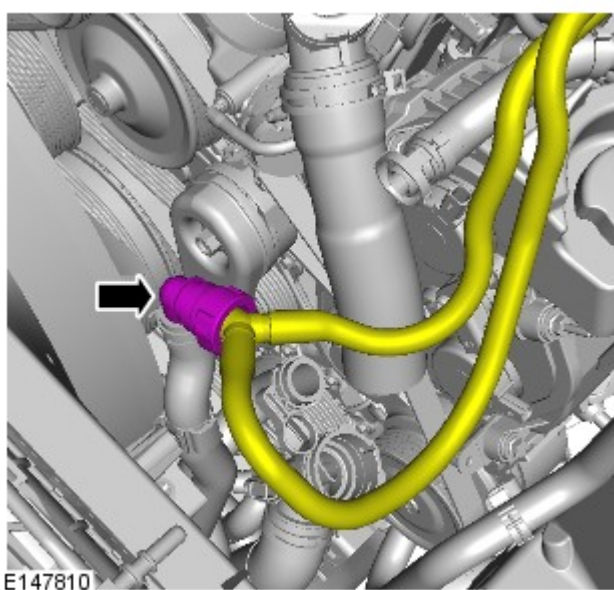



6.

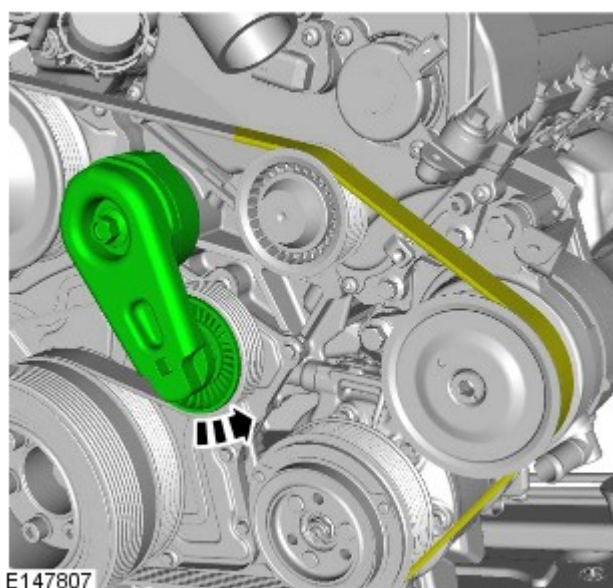

7.

**⚠ CAUTION:**

Be prepared to collect escaping fluids.

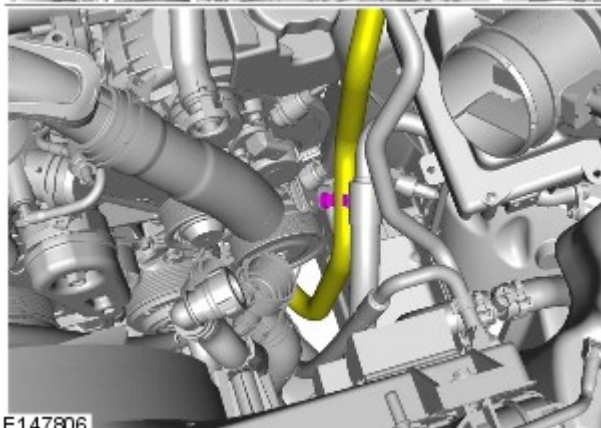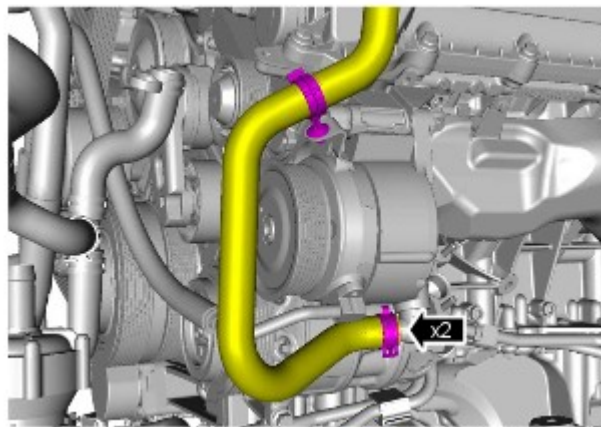


8.




**CAUTION:**

Be prepared to collect escaping fluids.

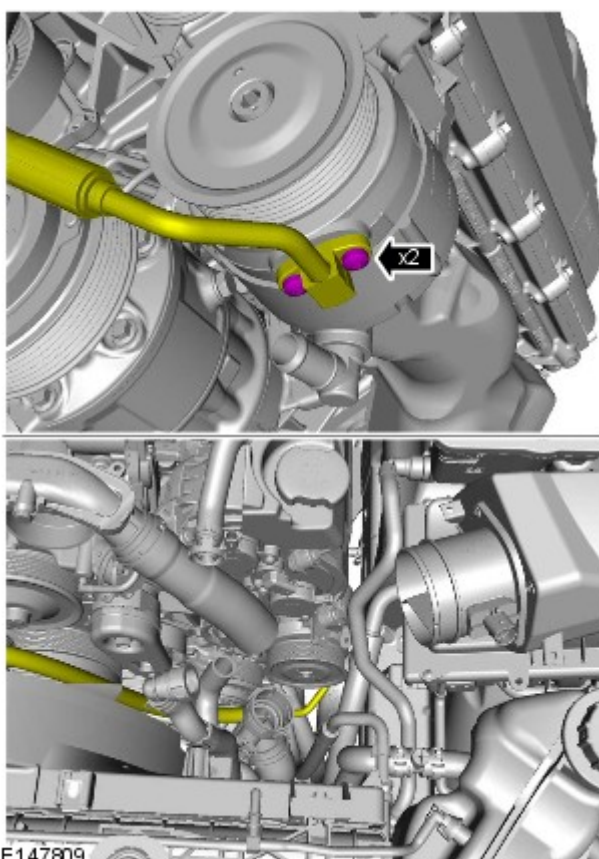

*Torque: 10 Nm*

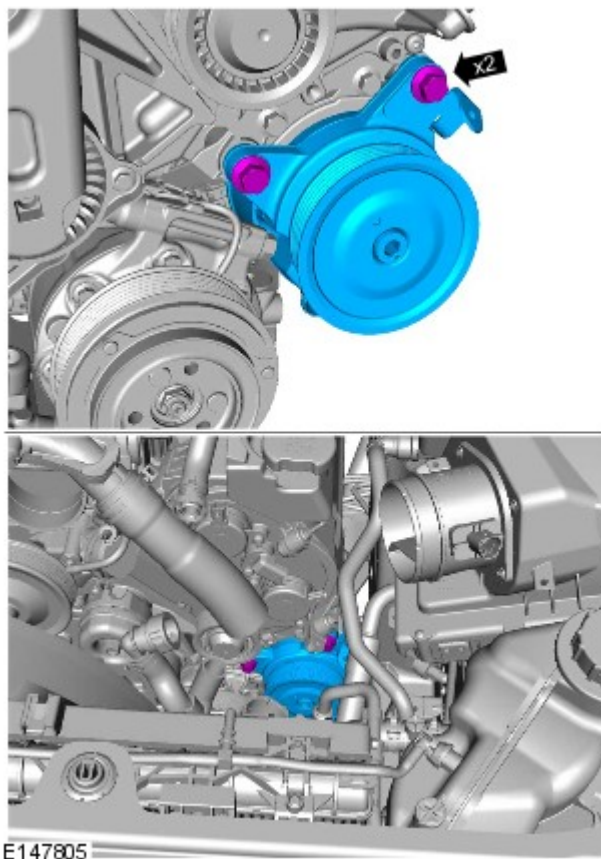

*Torque: 48 Nm*

## INSTALLATION

1. To install, reverse the removal procedure.
2. Refer to: Active Stabilization System Bleeding (204-06, General Procedures).