

2016.0 RANGE ROVER (LG), 204-06

RIDE AND HANDLING OPTIMIZATION

LOWER ACCELEROMETER

[G 1 5 6 3 4 5 8]

REMOVAL AND INSTALLATION

ACCELEROMETER					
- ACTIVE					
60.60.03	CORNERING	ALL	0.7	USED	+
	ENHANCEMENT	DERIVATIVES		WITHINS	
	(ACE) - LOWER -				
	RENEW				


REMOVAL

NOTE:

Removal procedure may contain installation details.

- 1. Disconnect the battery ground cable.
Refer to: [Specifications](#) (414-01 Battery, Mounting and Cables, Specifications).
- 2. Refer to: [Rear Rocker Panel Moulding - Standard Wheel Base](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

3.

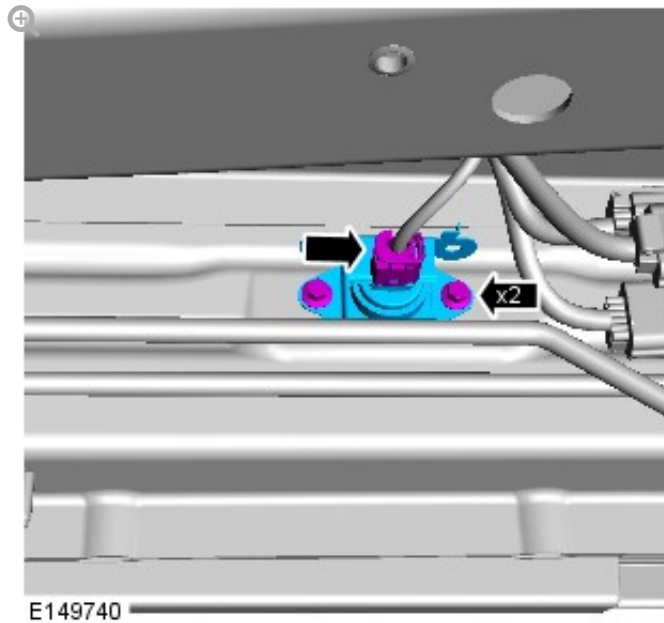

Torque: 7 Nm

INSTALLATION

1. To install, reverse the removal procedure.
2. Using the Land Rover approved diagnostic system, calibrate the Accelerometers.