

2016.0 RANGE ROVER (LG), 204-06

RIDE AND HANDLING OPTIMIZATION

REAR STABILIZER BAR BUSHING (G1561061)

REMOVAL AND INSTALLATION

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1.

WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

CAUTIONS:

- The bush must be installed without any additional lubricant. Failure to follow this instruction may cause damage to the component.
- Nuts and bolts must be tightened with vehicle at normal ride height.

NOTES:

- Support the dynamic response rear actuator to make sure the hydraulic hoses are not strained.
- Make sure the new bushes are installed in the correct orientation.
- Make sure that all the component mating faces are clean.

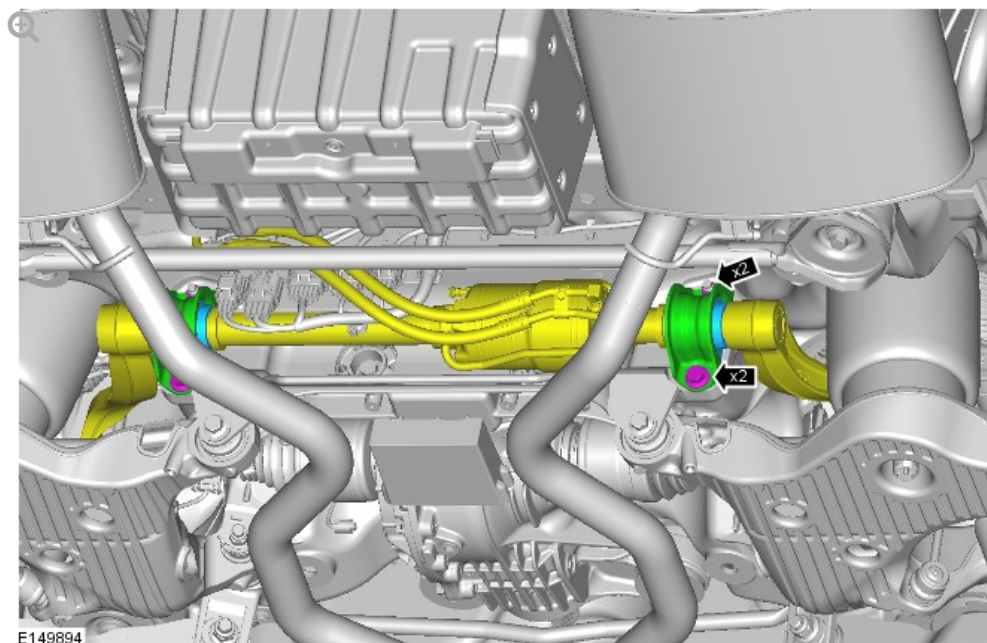

Torque: 110 Nm

INSTALLATION

1. To install, reverse the removal procedure.