

2016.0 RANGE ROVER (LG), 204-01

FRONT SUSPENSION

FRONT STABILIZER BAR (G1761168)

REMOVAL AND INSTALLATION

60.10.01	STABILIZER BAR - RENEW	3000 CC, TDV6, DIESEL	11.9	USED WITHINS	+
----------	------------------------------	-----------------------------	------	-----------------	---

REMOVAL

NOTES:

- Some variation in the illustrations may occur, but the essential information is always correct.
- Removal steps in this procedure may contain installation details.

1.

WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2. Refer to: [Front Subframe - GTDi 2.0L Petrol](#) (502-00 Uni-Body, Subframe and Mounting System, Removal and Installation).
Refer to: [Front Subframe - V8 N/A 5.0L Petrol/V8 S/C 5.0L Petrol](#)


(502-00 Uni-Body, Subframe and Mounting System, Removal and Installation).

Refer to: [Front Subframe - TDV6 3.0L Diesel](#) (502-00 Uni-Body, Subframe and Mounting System, Removal and Installation).

3.

CAUTIONS:

- Nuts must be tightened with vehicle at normal ride height.
- Use a wrench on the hexagon provided to prevent the ball joint rotating.

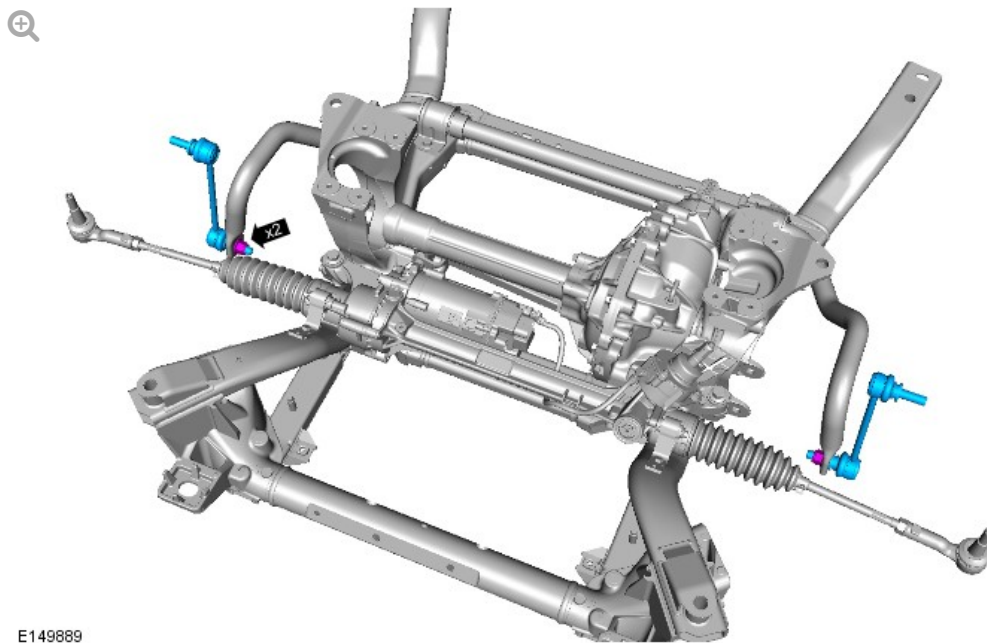

E149889

Torque: 185 Nm


4.

CAUTION:

Bolts must be tightened with vehicle at normal ride height.

NOTE:

Make sure that all the component mating faces are clean.

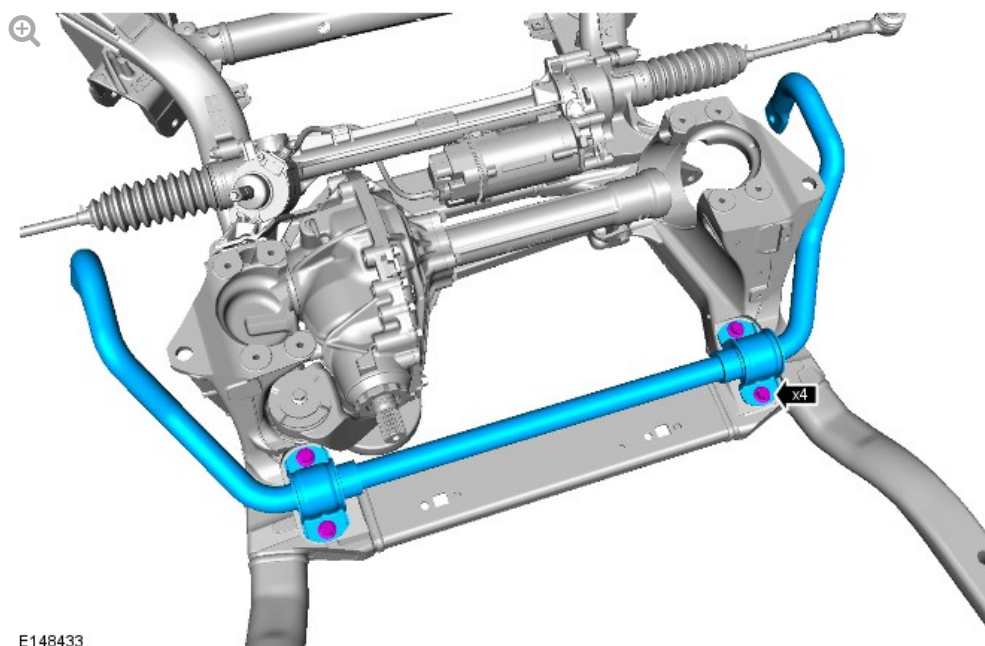

Torque:


Stage 1: 110 Nm

Stage 2: 110 Nm

5.

NOTE:

Only use clean water as a lubricant for the bushing, if required

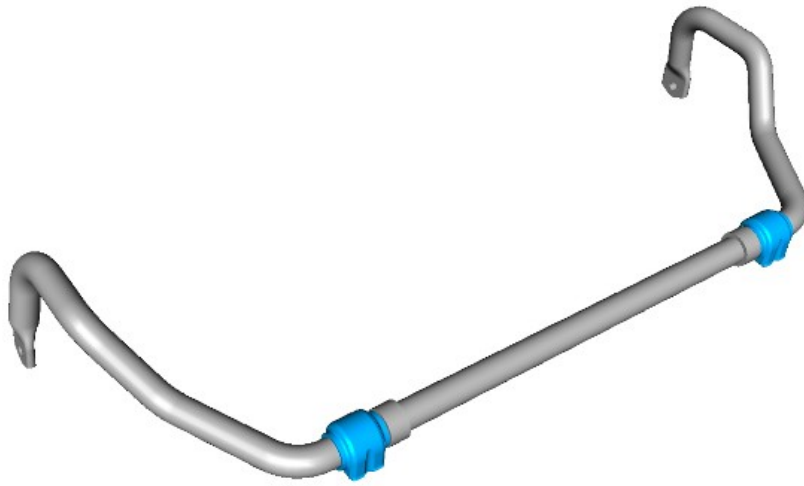

E149775

INSTALLATION

1. To install, reverse the removal procedure.