

2016.0 RANGE ROVER (LG), 204-02

REAR SUSPENSION

REAR STABILIZER BAR LINK

[G1508945]

REMOVAL AND INSTALLATION

64.35.24	LINK - STABILIZER BAR - RENEW	ALL DERIVATIVES	0.3	USED WITHINS	+
----------	--	--------------------	-----	-----------------	---

REMOVAL

NOTES:

- Removal steps in this procedure may contain installation details.
- LH illustration shown, RH is similar.

1.

WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

-
2. For additional information, refer to: Wheel and Tire (204-04, Removal and Installation).

3.

CAUTION:

Use a wrench on the hexagon provided to prevent the ball joint rotating.

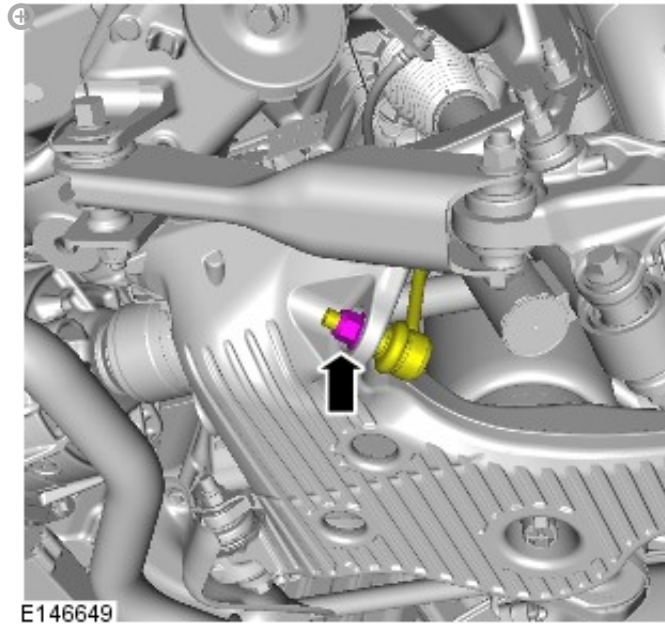


TORQUE: 185 Nm

4.

CAUTIONS:

- Use a wrench on the hexagon provided to prevent the ball joint rotating.
- Nuts must be tightened with vehicle at normal ride height.

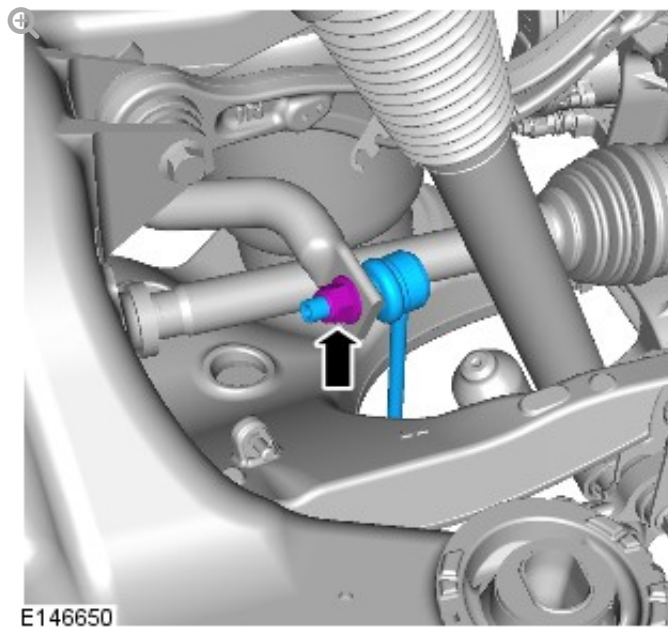

TORQUE: 185 Nm

INSTALLATION

1. To install, reverse the removal procedure.