

2016.0 RANGE ROVER (LG), 204-05

VEHICLE DYNAMIC SUSPENSION

AIR LINE CONNECTOR (G1551407)

GENERAL PROCEDURES

60.50.22	CONNECTOR(S) - PRESSURE LINE - RENEW	ALL DERIVATIVES	0.1	USED WITHINS
----------	--	--------------------	-----	-----------------

ACTIVATION

CAUTIONS:


- Make sure that the component is clean and free from foreign material and lubricant.
- Make sure the correct size and type of air line connector is installed.
- Do not reuse the air line connector. Always install a new air line connector every time it is released.

1.

CAUTION:

Using a suitable tool, remove the collet as illustrated.
Attempting to slide the collet from the air line will result in damage.

Make sure not to damage the airline.

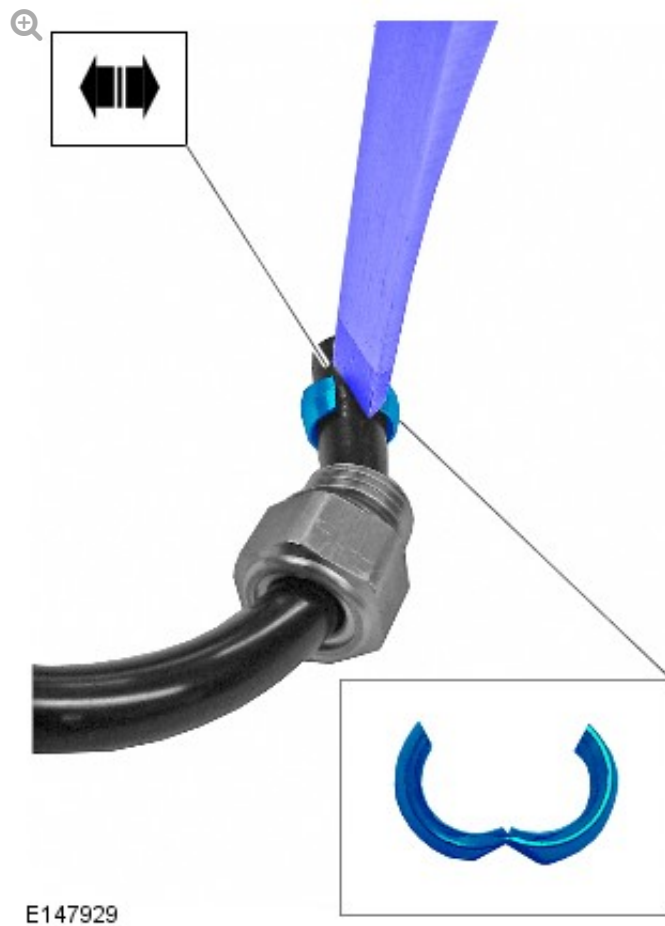


Use a suitable tool to snap the air line connector collet off the air line.



Remove the air line connector from the air line.


3.

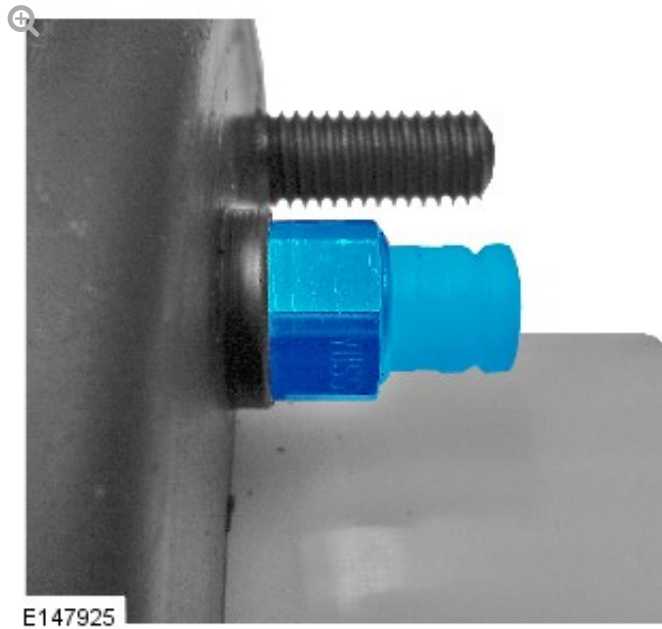

Install and fully tighten the new air line connector to the correct component's torque.

Refer to: [Specifications](#) (204-05 Vehicle Dynamic Suspension, Specifications).

4.

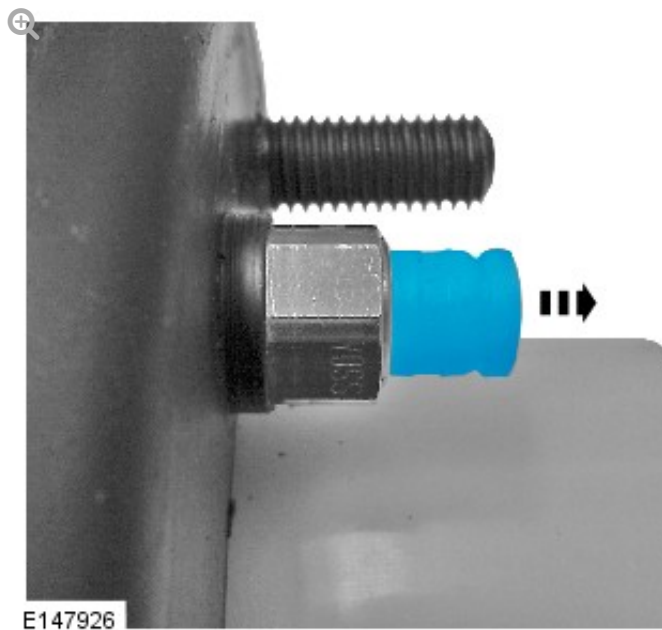

Remove the air line connector cap from the air line connector.

5.

CAUTION:

Make sure that the component is clean and free from foreign material.



Fully insert the air line into the air line connector.