

2016.0 RANGE ROVER (LG), 204-05

VEHICLE DYNAMIC SUSPENSION

FRONT SUSPENSION VERTICAL ACCELEROMETER

[G1676252]

REMOVAL AND INSTALLATION


REMOVAL

NOTES:


- Removal steps in this procedure may contain installation details.
- LH illustration shown, RH is similar.
- Some variation in the illustrations may occur, but the essential information is always correct.
- Some components shown removed for clarity.

1. Disconnect the battery ground cable
Refer to: [Specifications](#) (414-01 Battery, Mounting and Cables, Specifications).
2. Refer to: [Wheel and Tire - GTDi 2.0L Petrol/TDV6 3.0L Diesel /TDV8 4.4L Diesel/V6 S/C 3.0L Petrol /V8 N/A 5.0L Petrol/V8 S/C 5.0L Petrol](#) (204-04 Wheels and Tires, Removal and Installation).


3.

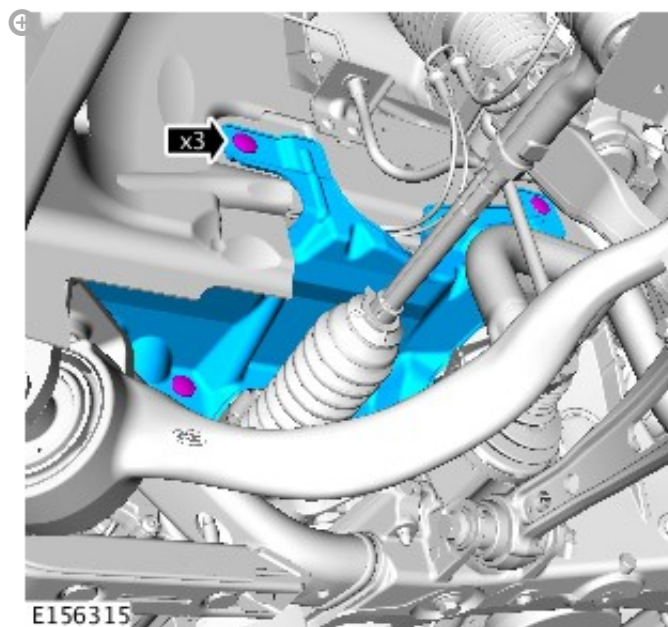


4.

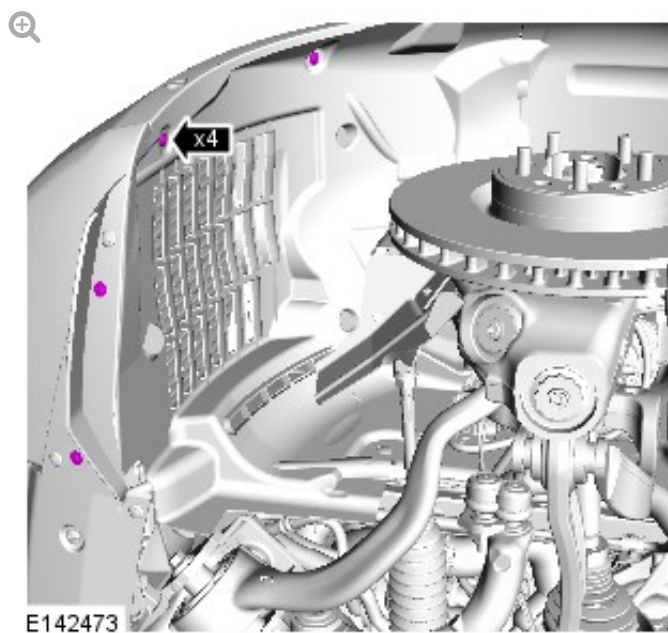


5.

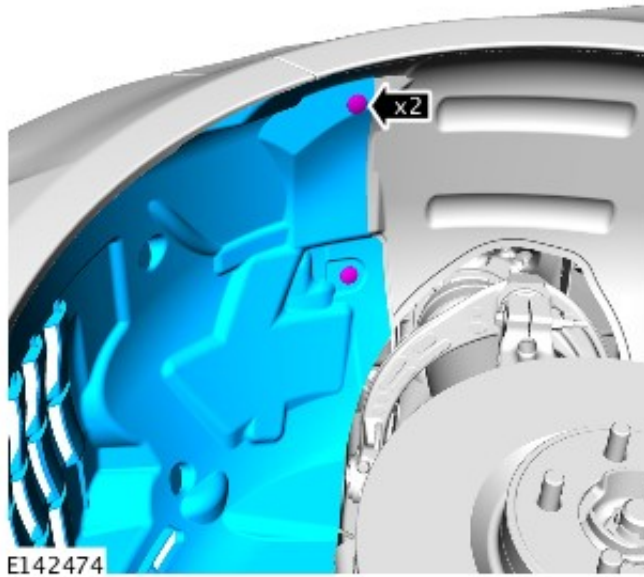

6.

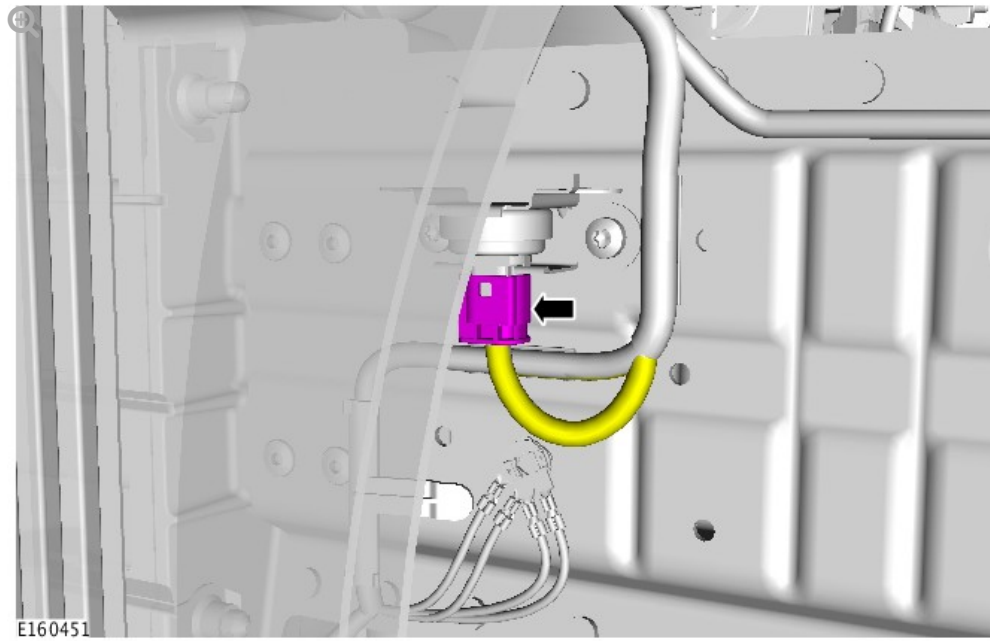

7.

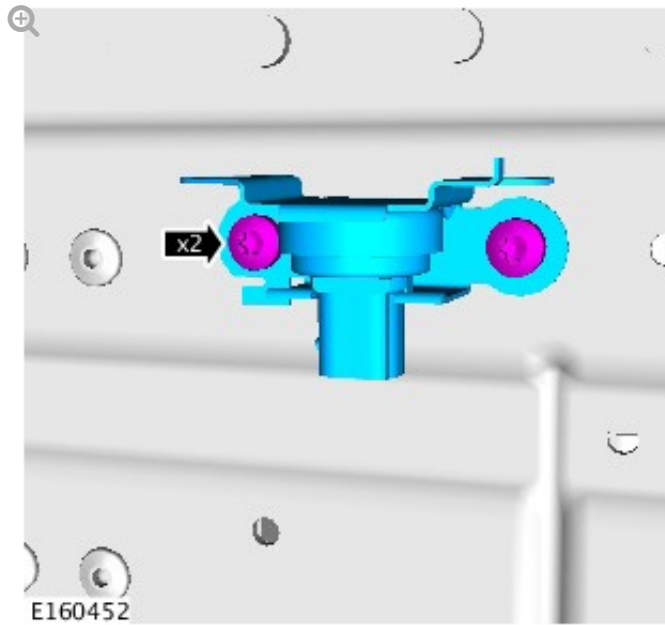

Torque: 10 Nm

INSTALLATION

1. To install, reverse the removal procedure.