

PUBLISHED: 10-JUL-2017
2014.0 RANGE ROVER (LG), 412-01

CLIMATE CONTROL

AIR CONDITIONING COMPRESSOR - V8 S/C 5.0L PETROL (G1509826)

REMOVAL


 NOTES:

- Removal steps in this procedure may contain installation steps.
- Some variation in illustrations may occur, but the essential information is always correct.
- Engine shown removed for clarity.


1. Refer to: Specifications (414-01 Battery, Mounting and Cables, Specifications).

2. Refer to: Air Conditioning System Recovery, Evacuation and Charging (412-00 Climate Control System - General Information, General Procedures).

3. Refer to: Cooling Fan (303-03 Engine Cooling - V8 N/A 5.0L Petrol/V8 S/C 5.0 L Petrol, Removal and Installation).

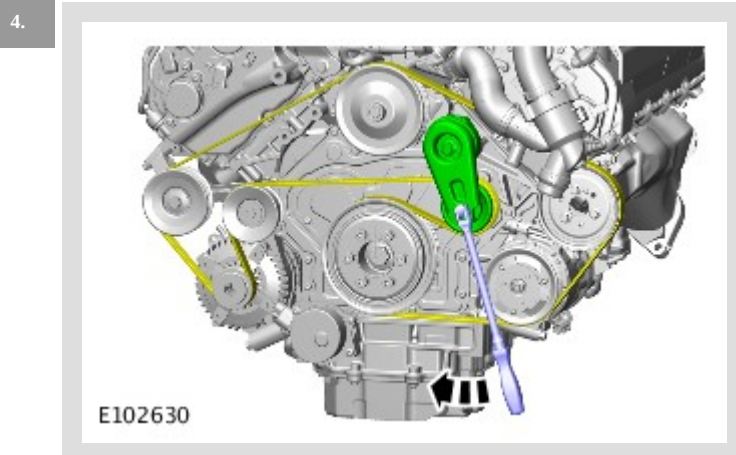

5.

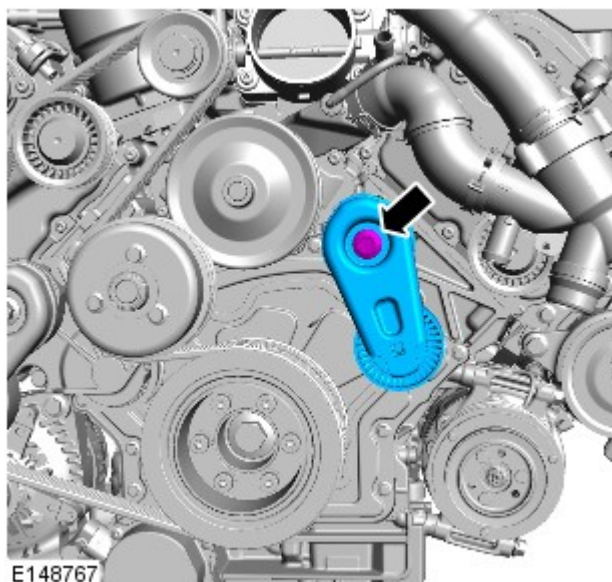

Torque: 40 Nm

6.




CAUTION:

Install a new bolt.



NOTES:

- Left hand drive vehicles only .
- Make sure to clean the threads prior to installation.

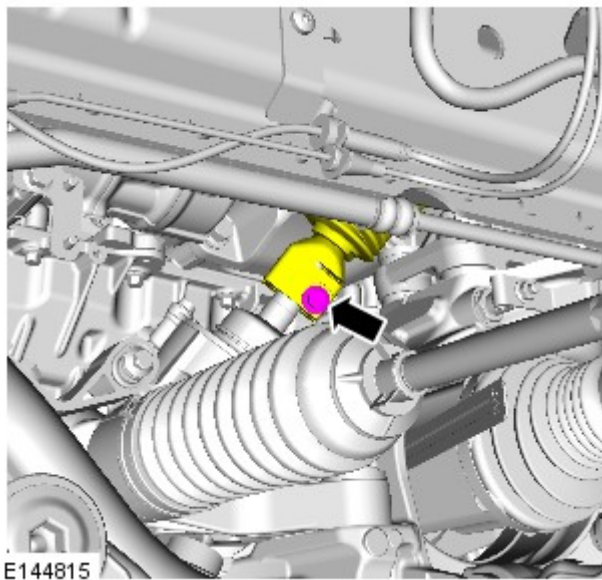


Torque: 30 Nm

7.

 NOTE:

Tie aside the dynamic response pump.

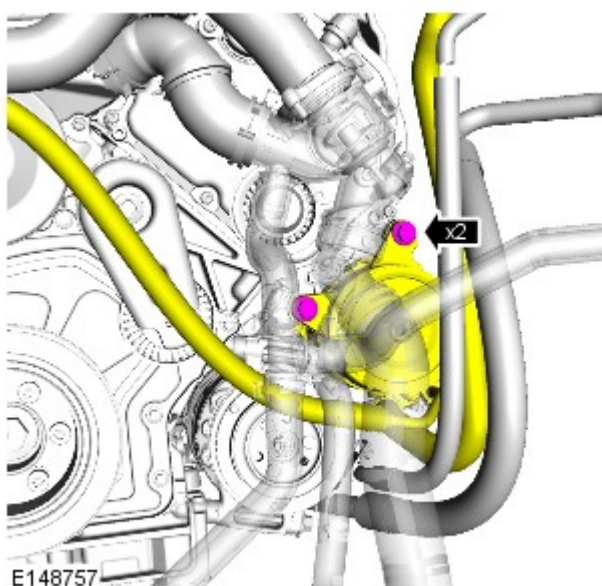


Torque: 22 Nm

8.




CAUTIONS:

- Before disconnecting any components, make sure the area is clean and free from foreign material. When disconnected all openings must be sealed.
- A new O-ring seal is to be installed.

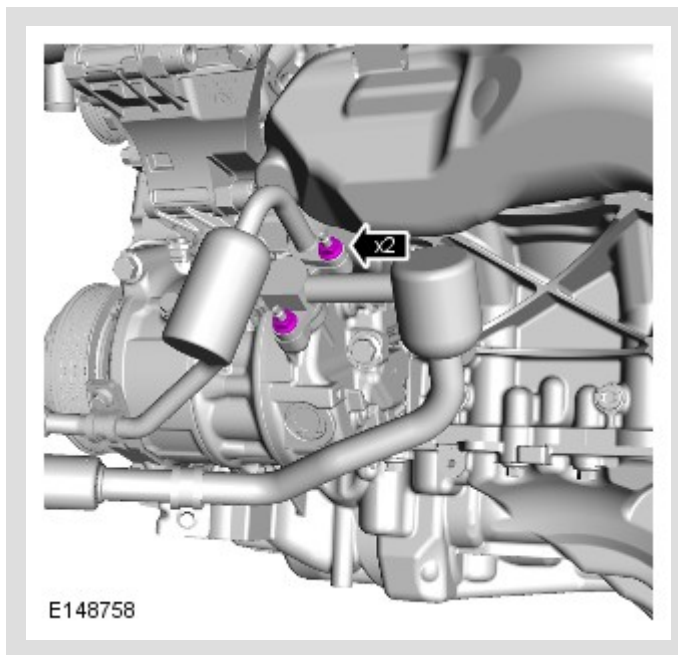


Torque: 18 Nm

9.

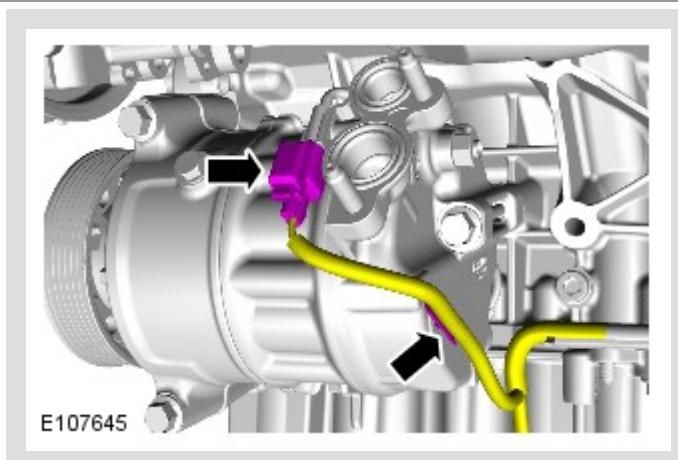


10.

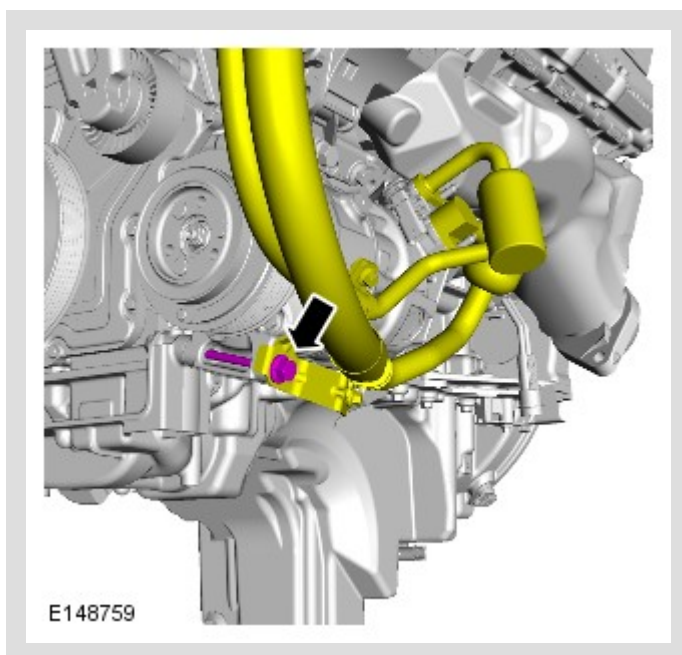


Torque: 25 Nm

11.

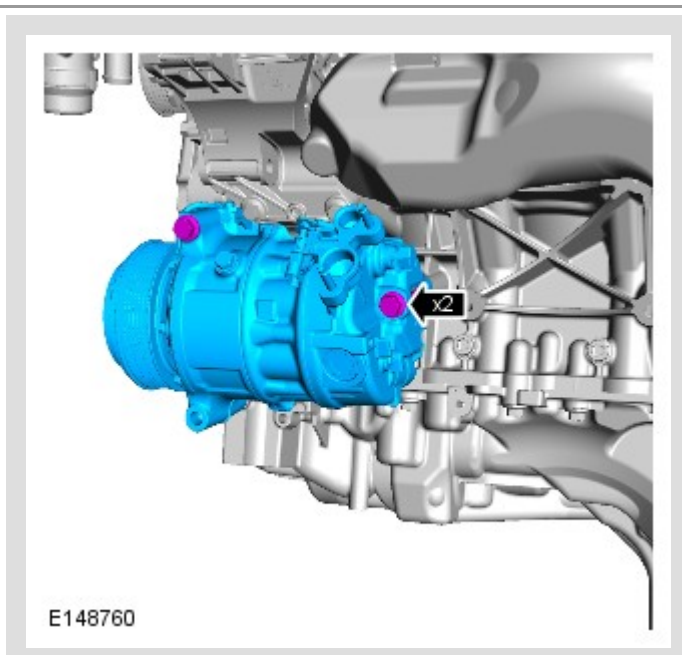

Torque: 25 Nm

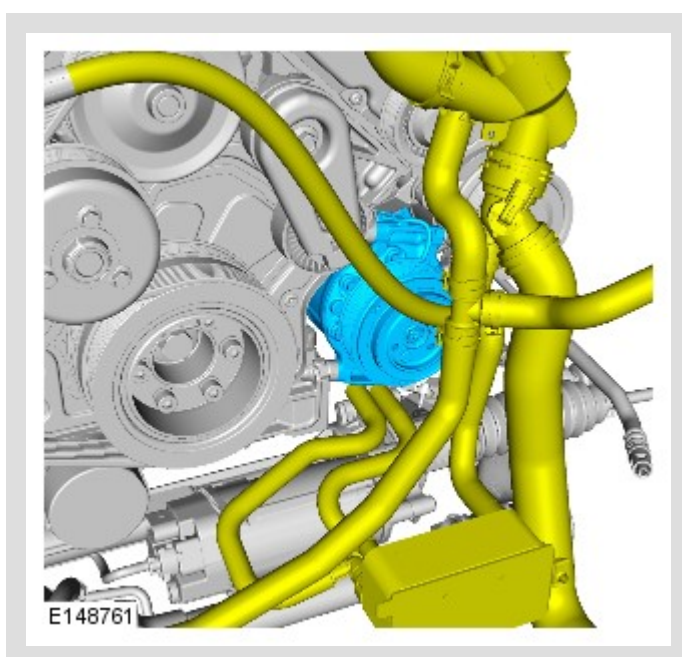

INSTALLATION

1. To install, reverse the removal procedure.