

2016.0 RANGE ROVER (LG), 413-13

PARKING AID

FRONT PARKING AID CAMERA [G1549866]

REMOVAL AND INSTALLATION

REMOVAL

NOTES:

- Removal steps in this procedure may contain installation details.
- The ignition must be switched off.

1.

WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2. Refer to: [Front Bumper Cover](#) (501-19 Bumpers, Removal and Installation).



3.

CAUTION:

If a new camera is installed, only the front face must be painted. Failure to follow this instruction may result in the component malfunctioning.

NOTE:

LH illustration shown, RH is similar.

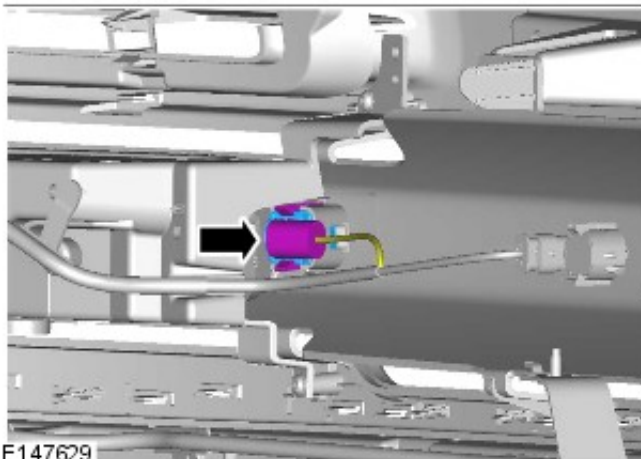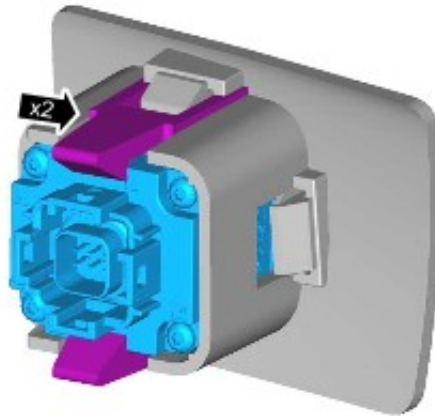

INSTALLATION

1. To install, reverse the removal procedure.

2.
 1. Following the replacement of a camera on these vehicles the calibration process is:
 2. Drive the vehicle for 5 to 10 minutes as much as possible in a straight line, up to 30kph / 19mph, during this time the camera will self-calibrate (do not have the camera functions turned on) to be carried out in normal daylight conditions.
 3. After completing the drive cycle camera operation can be checked by:
 4. Surround View Camera: To check calibration parked next to a kerb/line select camera view make sure a straight line is visible on screen in the 360 plan view
 5. Standalone Rear Camera To check calibration reverse straight into a marked parking slot and see trajectory overlays are parallel to the markings on the ground