

2016.0 RANGE ROVER (LG), 413-13

PARKING AID

SIDE PARKING AID CAMERA

[G1676334]

REMOVAL AND INSTALLATION

REMOVAL

NOTES:


- Removal steps in this procedure may contain installation details.
- The ignition must be switched off.
- LH illustration shown, RH is similar.

1. Refer to: [Exterior Mirror Motor](#) (501-09 Rear View Mirrors, Removal and Installation).


2.

CAUTION:

Take extra care not to damage the wiring harnesses.

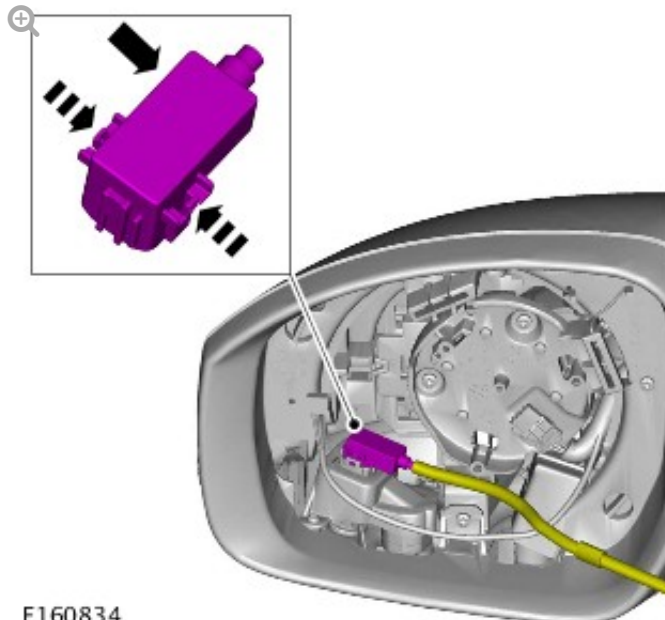

3.

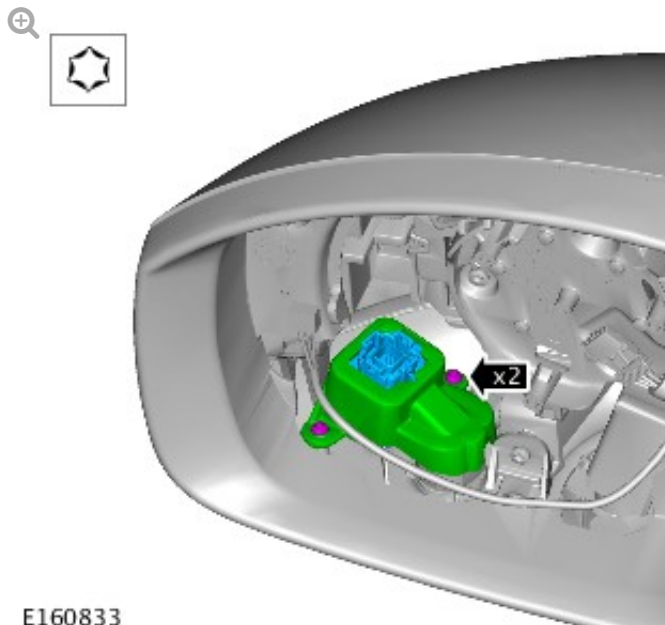

Torque: 0.5 Nm

INSTALLATION

1. To install, reverse the removal procedure.
2.
 - Following the replacement of a camera on these vehicles the calibration process is:
 - Drive the vehicle for 5 to 10 minutes as much as possible in a

straight line, up to 30kph / 19mph, during this time the camera will self-calibrate (do not have the camera functions turned on) to be carried out in normal daylight conditions.

- After completing the drive cycle camera operation can be checked by:
- Surround View Camera: To check calibration parked next to a kerb/line select camera view make sure a straight line is visible on screen in the 360 plan view
- Standalone Rear Camera To check calibration reverse straight into a marked parking slot and see trajectory overlays are parallel to the markings on the ground