

PUBLISHED: 06-SEP-2012
2014.0 RANGE ROVER (LG), 303-05

ACCESSORY DRIVE - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

COOLING FAN BELT (G1509488)

REMOVAL AND INSTALLATION

26.25.01	BELT - VISCIOUS FAN - RENEW	5000 CC, AJ V8, SUPERCHARGED	0.5	USED WITHINS	
----------	--------------------------------------	------------------------------------	-----	-----------------	--

SPECIAL TOOL(S)




REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.


1. Refer to: Cooling Fan - V8 5.0L Petrol (303-03, Removal and Installation).

2.

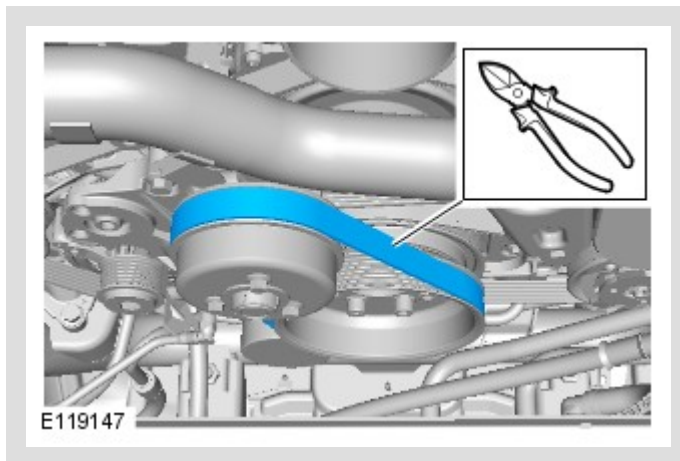

INSTALLATION

1.

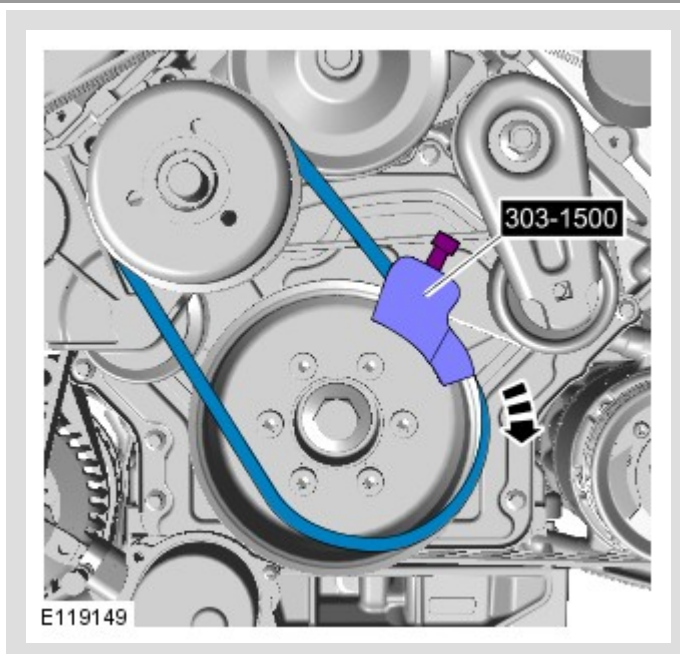

- Install the cooling fan belt.
- *Special Tool(s):* [303-1500](#)

2. Remove the special tool.

- 3.
- Whilst rotating the engine, make sure that pressure is applied to the left hand side of the cooling fan belt to aid installation.
 - Rotate the engine until the special tool has reached the 9 o'clock position.

4. Rotate the engine clockwise twice, making sure that the belt is seated on both pulleys correctly.

5. Refer to: Cooling Fan - V8 5.0L Petrol (303-03, Removal and Installation).