

2016.0 RANGE ROVER (LG), 307-01

AUTOMATIC TRANSMISSION/TRANSAXLE - VEHICLES WITH: 8HP70 8-SPEED AUTOMATIC TRANSMISSION AWD

SELECTOR SHAFT SEAL (G1509713)

REMOVAL AND INSTALLATION

		3000 CC, TDV6, DIESEL, WITH PARTICULATE FILTER, WITH DIESEL EXHAUST FLUID			
44.15.31	OIL SEAL - SELECTOR SHAFT - LH - RENEW		2.8	USED WITHINS	+

SPECIAL TOOL(S)



307-509-
1(LRT-44-
033/1)
Seal extractor



**307-509-
2(LRT-44-
033/2)**

Seal extractor



**307-509-
3(LRT-44-
033/3)**

Seal installer

REMOVAL


1.

WARNING:

Do not work on or under a vehicle supported only by a jack.
Always support the vehicle on safety stands.

Raise and support the vehicle.

2.

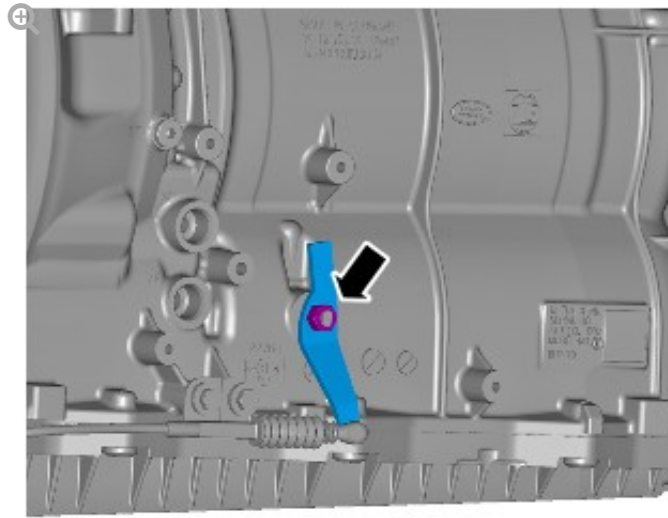

E149590

TORQUE: 12 Nm


3. Release the selector cable and lever.

- Remove the nut.

4.

CAUTION:

Before the disconnection or removal of any components, make sure the area around joint faces and connections are clean. Plug any open connections to prevent contamination.

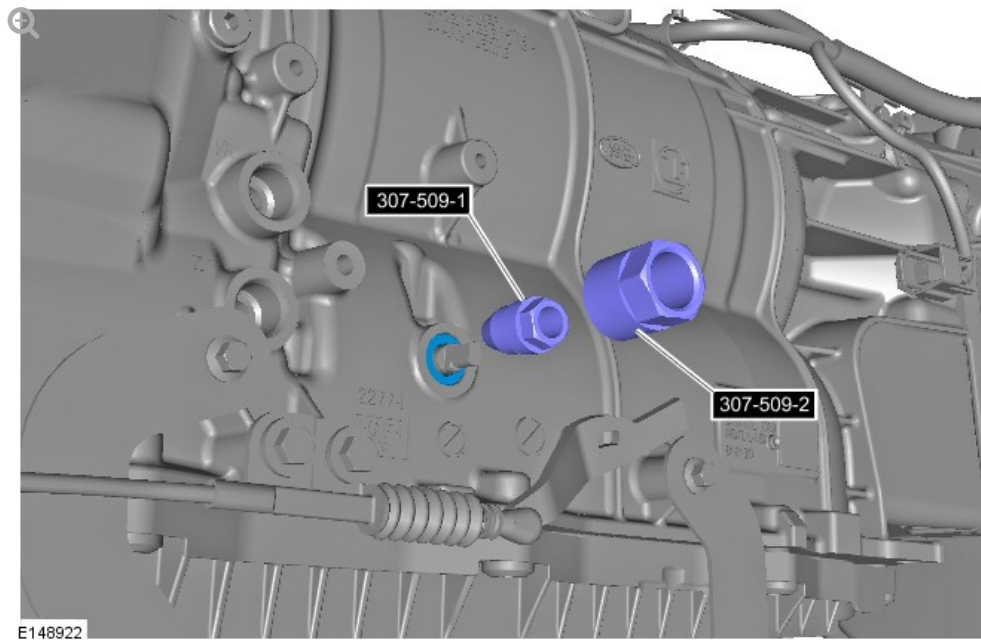


Remove the selector shaft seal.

- Install 307-509-1 to the seal.
- Install 307-509-2 to 307-509-1 and extract the seal.

INSTALLATION


1.

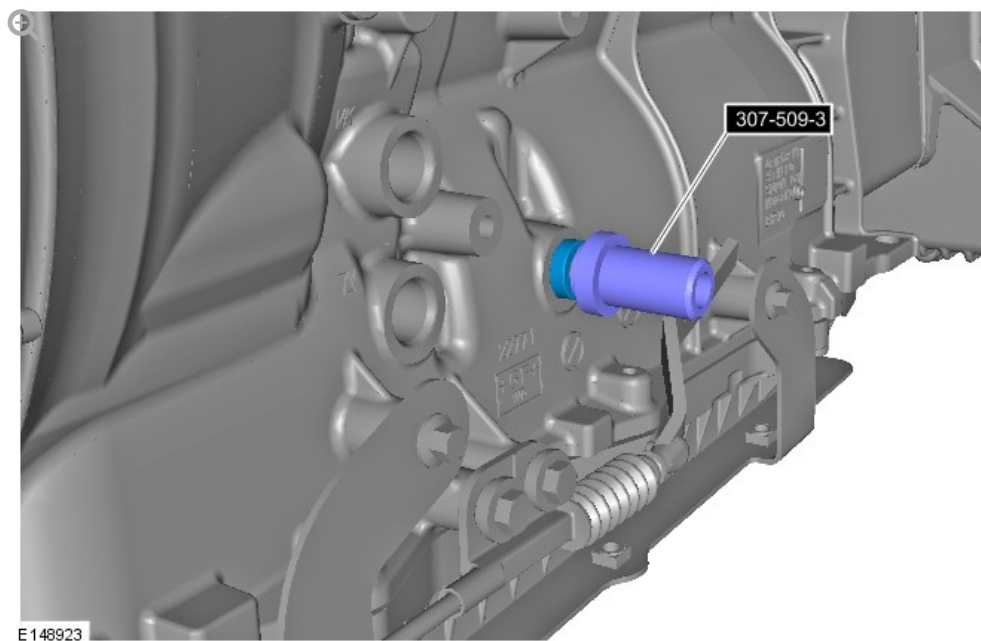

Using 307-509-3, install the selector shaft seal.

- Clean the components.

2.

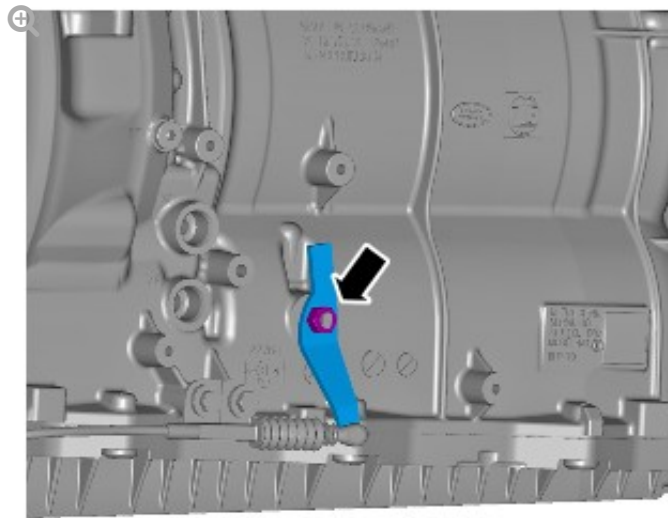

E149590

Install the selector cable and lever.

- Secure with the clip.
- TORQUE: 12 Nm