

PUBLISHED: 07-JUN-2017
2015.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - TDV8 4.4L DIESEL

ENGINE OIL PRESSURE SENSOR (G1509577)

REMOVAL AND INSTALLATION

12.60.50	SWITCH - OIL PRESSURE - RENEW	4400 CC, TDV8	0.1	USED WITHINS	
----------	--	------------------	-----	-----------------	--

REMOVAL



NOTE:

Removal steps in this procedure may contain installation details.

1.

Refer to: [Engine Cover - 4.4L V8 - TdV8](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

2.




CAUTIONS:

- Before disconnecting any components, make sure the area is clean and free from foreign material. When disconnected all openings must be sealed.
- Be prepared to collect escaping oil.



NOTE:

Note the position of the wiring harness.

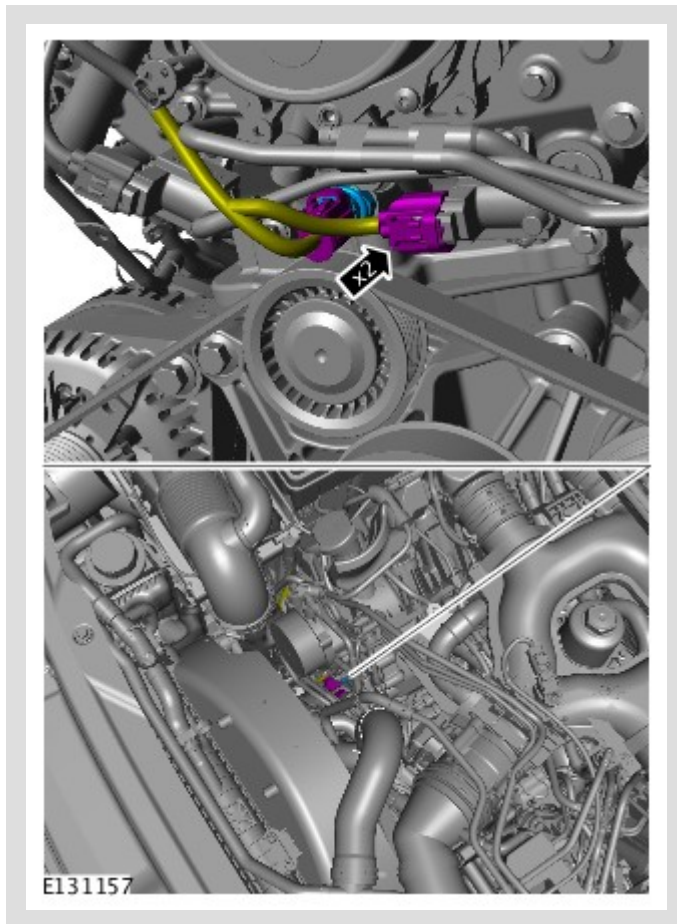

Torque: 14 Nm

INSTALLATION

1.

⚠ CAUTION:

Make sure the wiring harness is installed to its original position.

To install, reverse the removal procedure.

