

PUBLISHED: 31-JUL-2012
2015.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - TDV8 4.4L DIESEL

HEATED OXYGEN SENSOR (G1518050)

REMOVAL AND INSTALLATION

19.22.16	SENSOR - HEATED OXYGEN (HO2S) - FRONT /LEFT /EACH - RENEW	4400 CC, TDV8	0.6	USED WITHINS	
----------	--	------------------	-----	-----------------	--

SPECIAL TOOL(S)



REMOVAL



WARNING:

Observe due care when working near a hot exhaust system.



NOTE:

Removal steps in this procedure may contain installation details.

1.



WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2.


Refer to: [Catalytic Converter](#) (309-00D Exhaust System - TDV8 4.4L Diesel, Removal and Installation).

3.

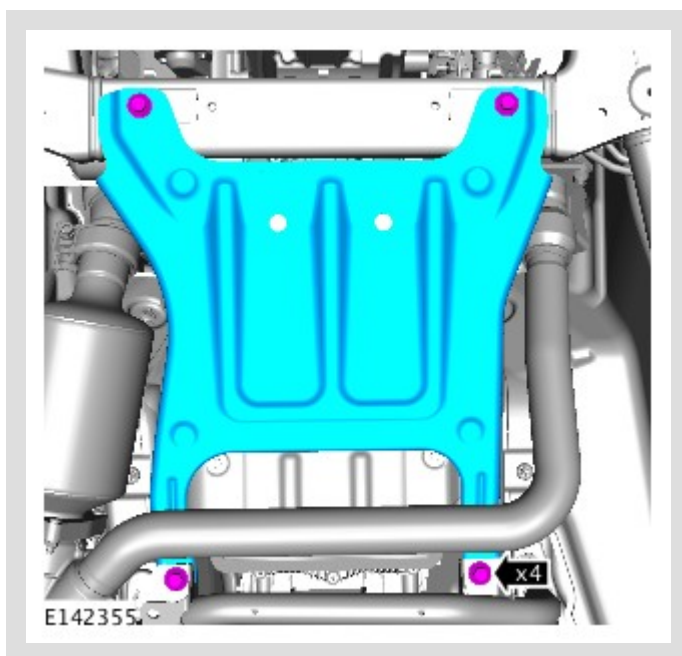


Torque: 60 Nm

4.

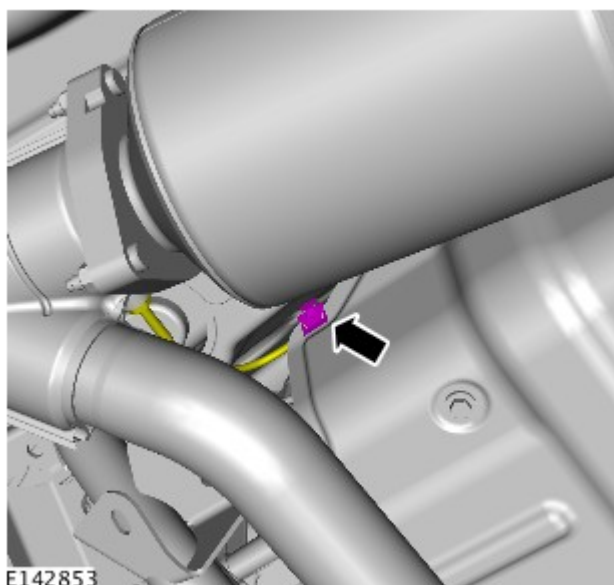


5.

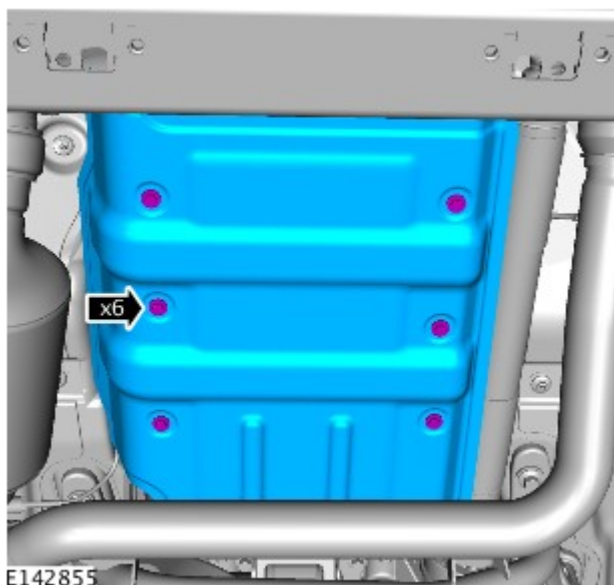

Torque: 10 Nm

6.

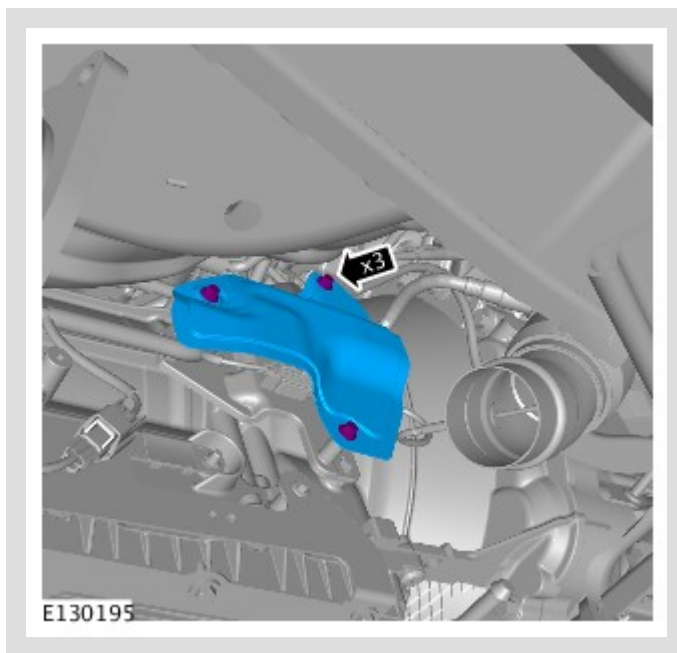


Torque: 10 Nm

7.

⚠ CAUTION:

Make sure that the mating faces are clean and free of foreign material.

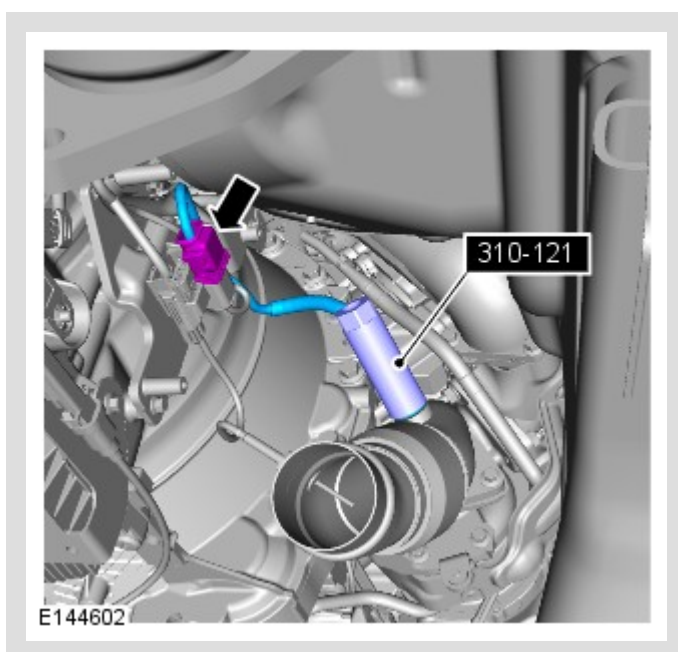

Special Tool(s): [310-121](#)

Torque: 48 Nm

INSTALLATION

1.



CAUTION:

If accidentally dropped or knocked install a new sensor.



NOTE:

If the original sensor is to be installed, apply lubricant meeting specification ESE-M12A4-A to the thread of the sensor.

To install, reverse the removal procedure.

