

2016.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - TDV6 3.0L DIESEL

PRE CATALYTIC CONVERTER TEMPERATURE SENSOR (G1883378)

REMOVAL AND INSTALLATION

18.31.55	CATALYST PRE TEMPERATURE SENSOR - RENEW	3000 CC, TDV6, DIESEL, WITH PARTICULATE FILTER, WITH DIESEL EXHAUST FLUID	1.2	USED WITHINS	+
18.31.55	CATALYST PRE TEMPERATURE SENSOR - RENEW	3000 CC, TDV6, WITH PARTICULATE FILTER	0.7	USED WITHINS	+

REMOVAL

NOTE:

- Some variation in the illustrations may occur, but the essential information is always correct.
- Some components shown removed for clarity.

1.

WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


2. Remove the front driveshaft.

Refer to: [Front Driveshaft - TDV6 3.0L Diesel](#) (205-01 Driveshaft, Removal and Installation).

3.

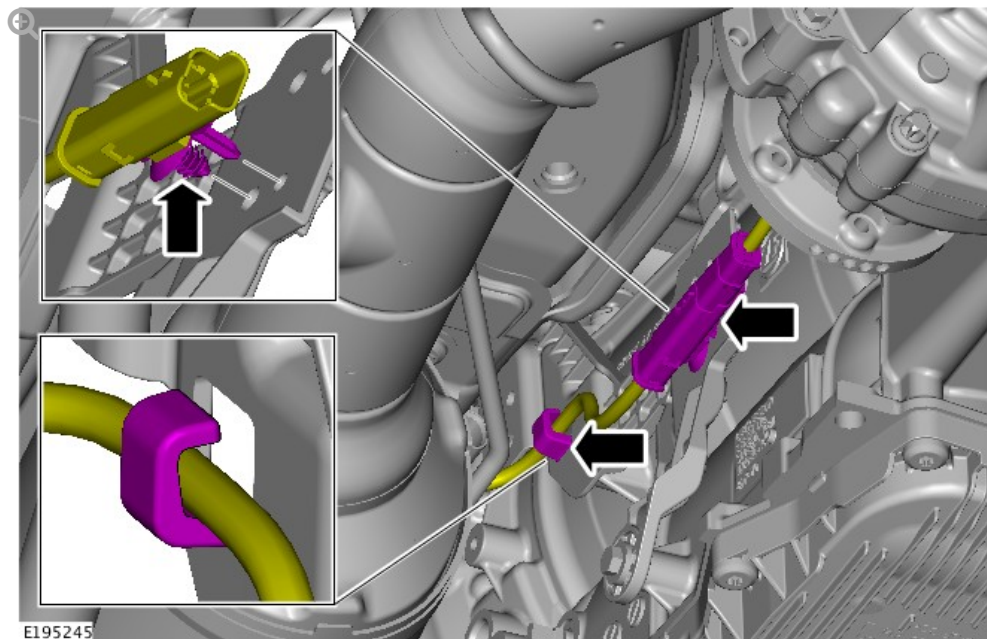

4.

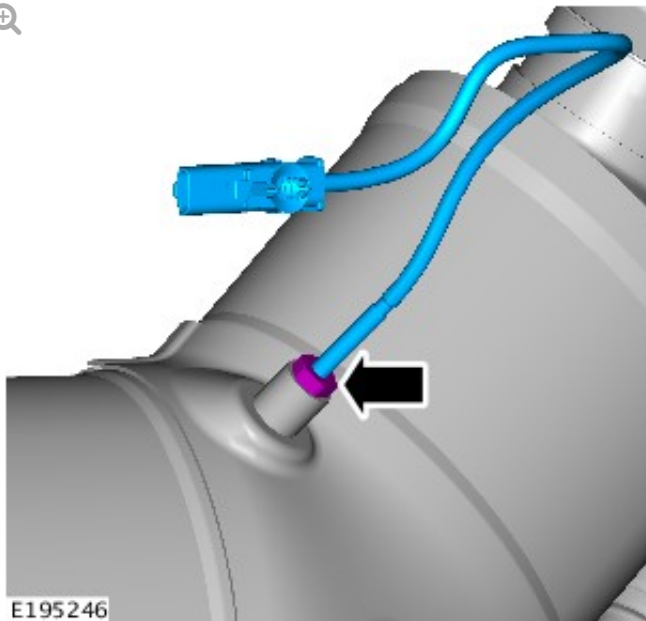

INSTALLATION


1.

CAUTION:

- If accidentally dropped or knocked install a new sensor.
- Make sure that the mating face is clean and free of foreign material.


NOTE:

If the original sensor is to be installed, apply lubricant meeting specification ESE-M12A4-A to the thread of the sensor.

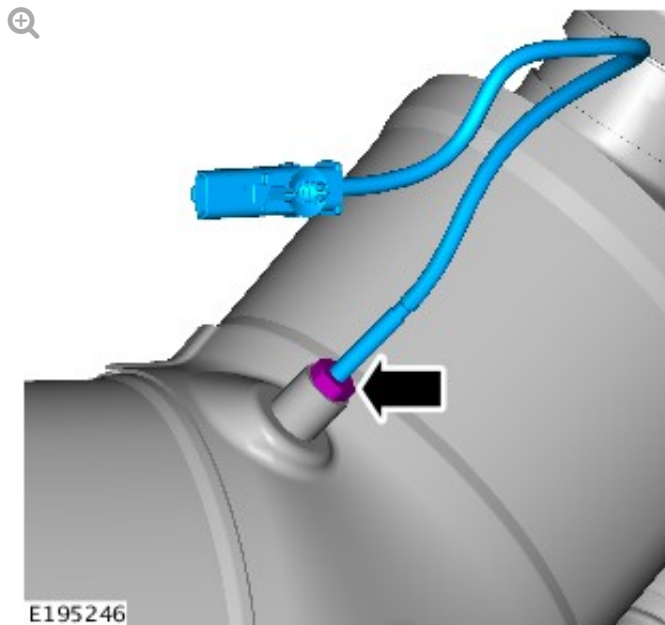

Torque: 35 Nm

2.

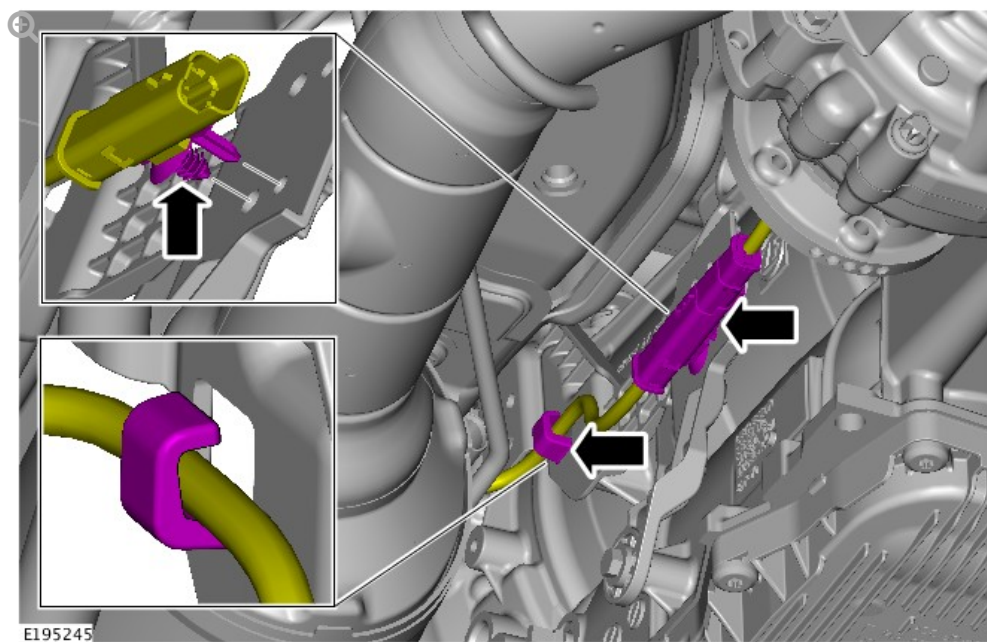

3. Install the front driveshaft.
Refer to: [Front Driveshaft - TDV6 3.0L Diesel](#) (205-01 Driveshaft, Removal and Installation).