

PUBLISHED: 24-AUG-2012
2014.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

ENGINE OIL LEVEL SENSOR (G1509592)

REMOVAL AND INSTALLATION

12.60.51	SWITCH - OIL LEVEL INDICATOR - RENEW	5000 CC, AJ V8, SUPERCHARGED	1.3	USED WITHINS	
----------	---	------------------------------------	-----	-----------------	--

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1. Refer to: Engine Undershield (501-02, Removal and Installation).

2. Refer to: Engine Oil Draining and Filling (303-01, General Procedures).

3. WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

4. CAUTION:

Before the disconnection or removal of any components, make sure the area around joint faces and connections are clean. Plug any open connections to prevent contamination.

NOTE:

Install a new O-ring seal.

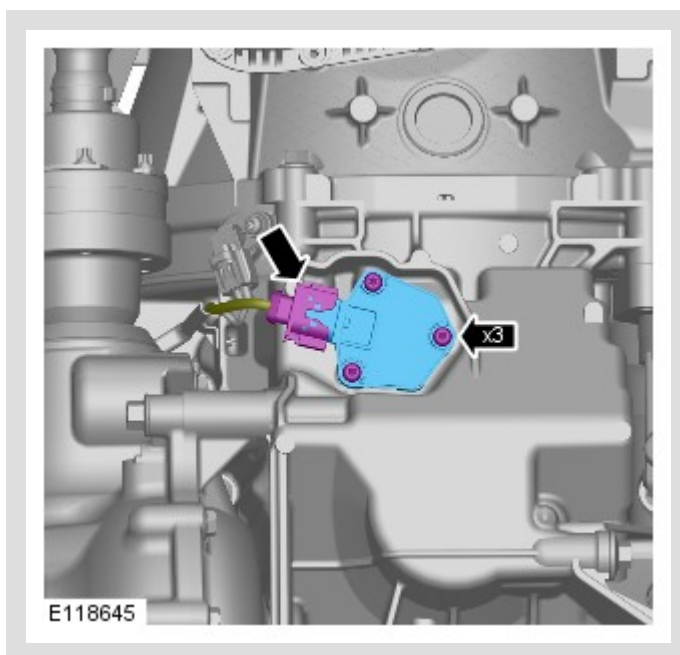

Torque: 12 Nm

INSTALLATION

1. To install, reverse the removal procedure.