

PUBLISHED: 09-APR-2013
2014.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

MANIFOLD ABSOLUTE PRESSURE SENSOR (G1509618)

REMOVAL AND INSTALLATION

18.30.56	SENSOR - MANIFOLD AIR PRESSURE - RENEW	5000 CC, AJ V8, SUPERCHARGED	0.7	USED WITHINS	
----------	--	------------------------------------	-----	-----------------	--

REMOVAL

NOTES:


- Removal steps in this procedure may contain installation details.
- Some variation in the illustrations may occur, but the essential information is always correct.

1. Disconnect the battery ground cable.
Refer to: Specifications (414-00 Battery and Charging System - General Information, Specifications).

2. Refer to: Engine Cover - V8 5.0L Petrol/V8 S/C 5.0L Petrol (501-05 Interior Trim and Ornamentation, Removal and Installation).


3. Refer to: Cowl Panel Grille (501-02, Removal and Installation).

4.

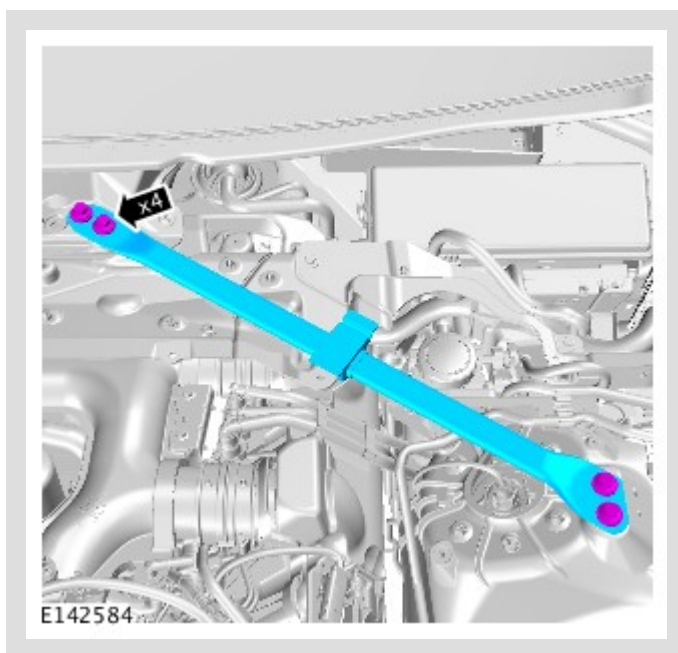


Torque: 55 Nm

5.

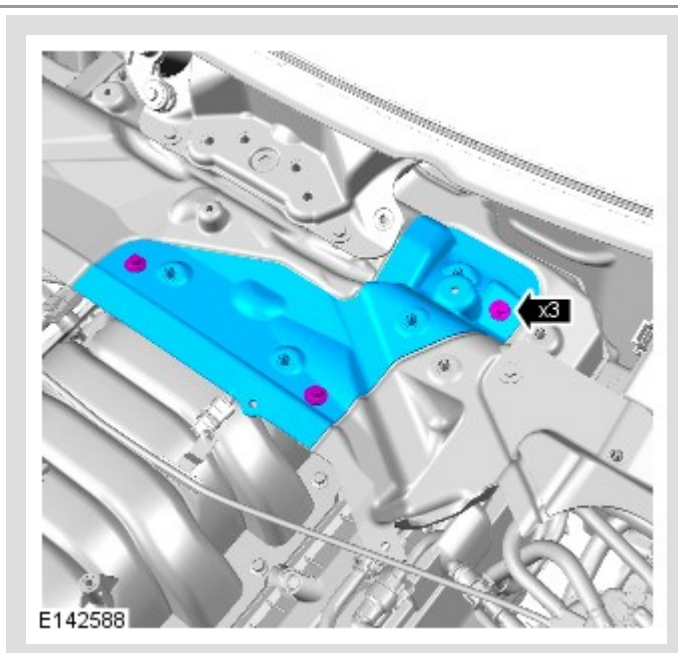


Torque: 6 Nm

6.

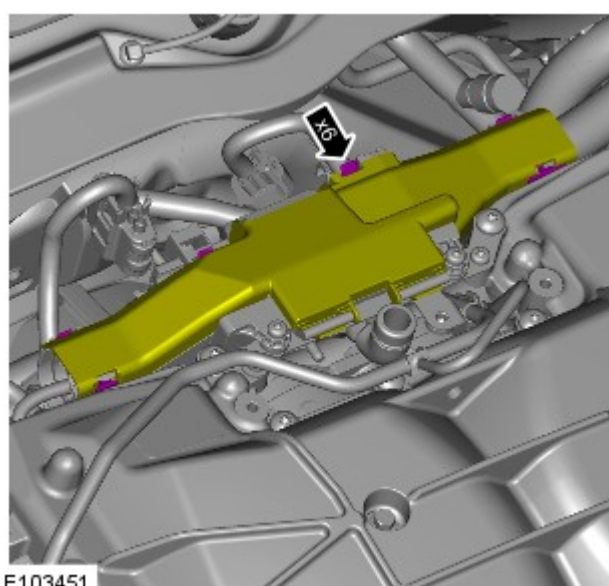


7.

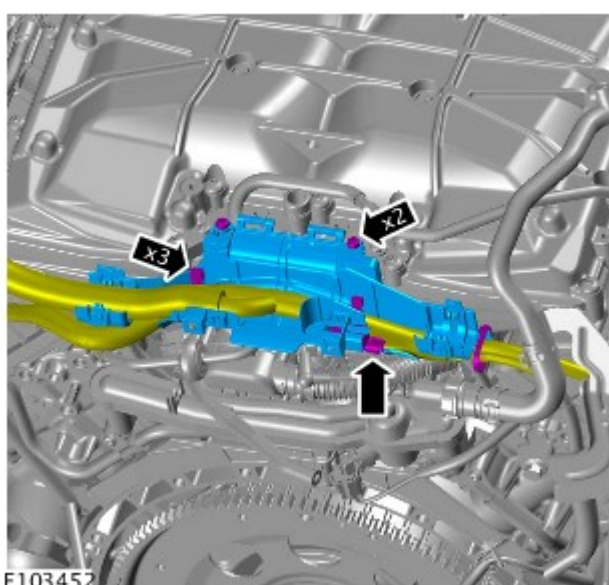


Torque: 10 Nm

8.

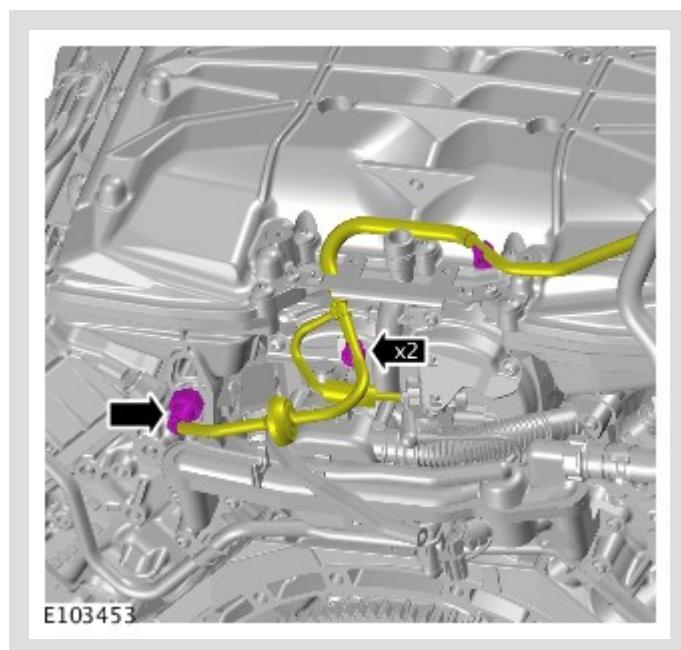

9.

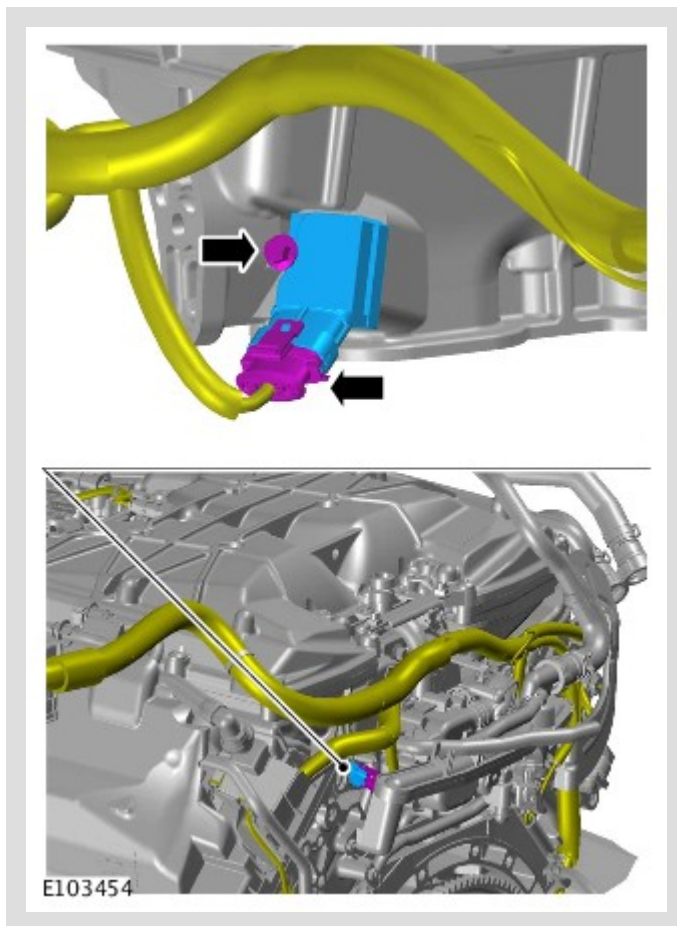

Torque: 5 Nm

INSTALLATION

1. To install, reverse the removal procedure.