

PUBLISHED: 04-APR-2016
2014.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

POST CATALYST HEATED OXYGEN SENSOR (G1535056)

REMOVAL AND INSTALLATION

SPECIAL TOOL(S)



REMOVAL



WARNING:

Observe due care when working near a hot exhaust system.



NOTES:

- Removal steps in this procedure may contain installation details.
- LH illustration shown, RH is similar.

1.




WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2.

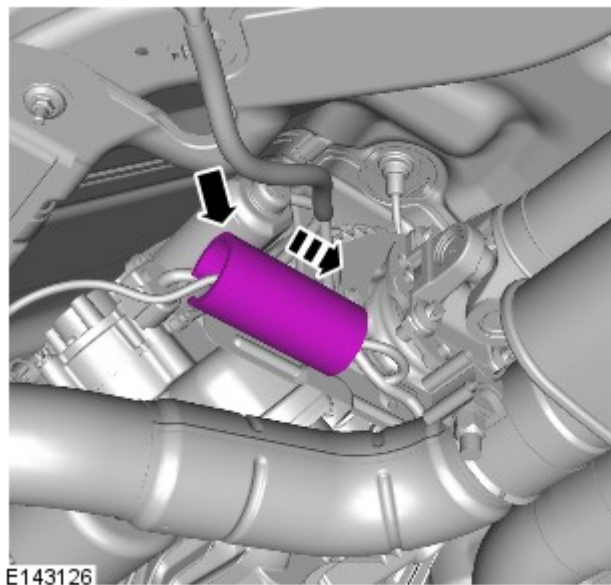


3.

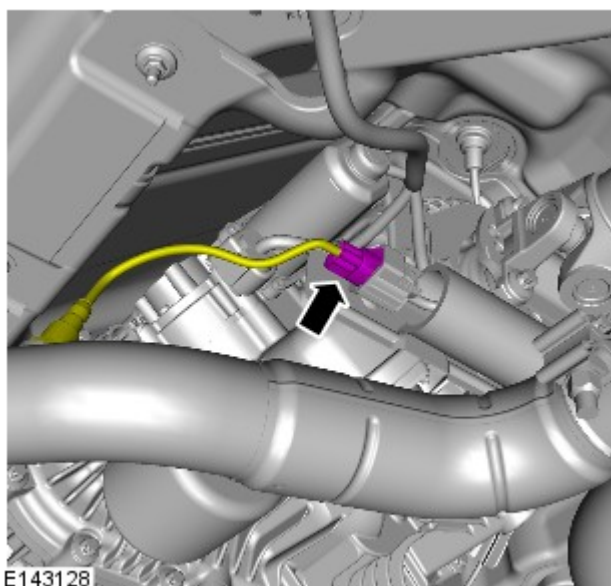

4.

⚠ CAUTION:

Make sure that the mating faces are clean and free of foreign material.

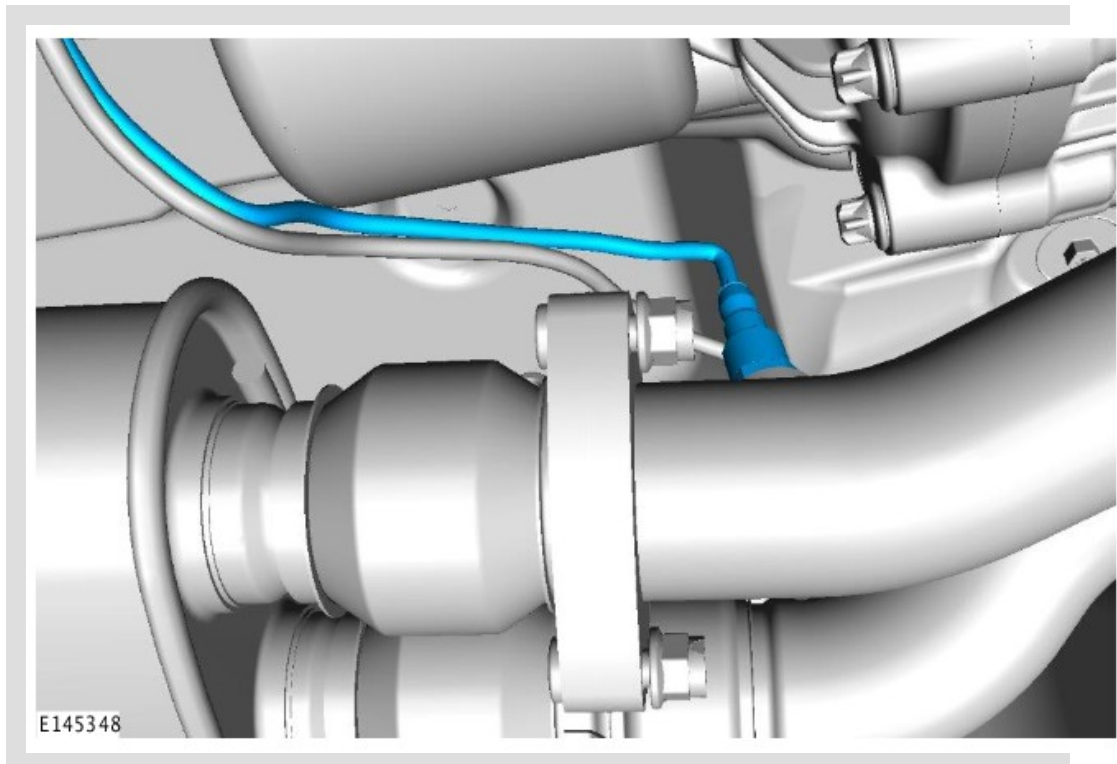

Special Tool(s): [310-121](#)

Torque: **48 Nm**

INSTALLATION

1.

ⓘ CAUTIONS:

- Make sure the anti-seize compound does not contact the HO2S tip.
- If accidentally dropped or knocked install a new sensor.
- Make sure the HO2S wiring harness is not twisted more than 180 degrees and is not in contact with either the exhaust or driveshaft.

 NOTE:

If the original sensor is to be installed, apply lubricant meeting specification ESE-M12A4-A to the thread of the sensor.

To install, reverse the removal procedure.