

PUBLISHED: 24-OCT-2017
2014.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

PRE CATALYST HEATED OXYGEN SENSOR (G1535057)

REMOVAL AND INSTALLATION

17.50.42	SENSOR - HEATED OXYGEN (HO2S) - PRE CATALYST - RIGHT - RENEW	5000 CC, AJ V8	1.9	USED WITHINS	
----------	---	-------------------	-----	-----------------	--

SPECIAL TOOL(S)



REMOVAL



WARNING:

Observe due care when working near a hot exhaust system.



NOTES:

- Removal steps in this procedure may contain installation details.
- LH illustration shown, RH is similar.

1.



WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2.


Refer to: Exhaust System (309-00 Exhaust System - V8 S/C 5.0L Petrol, Removal and Installation).

3.

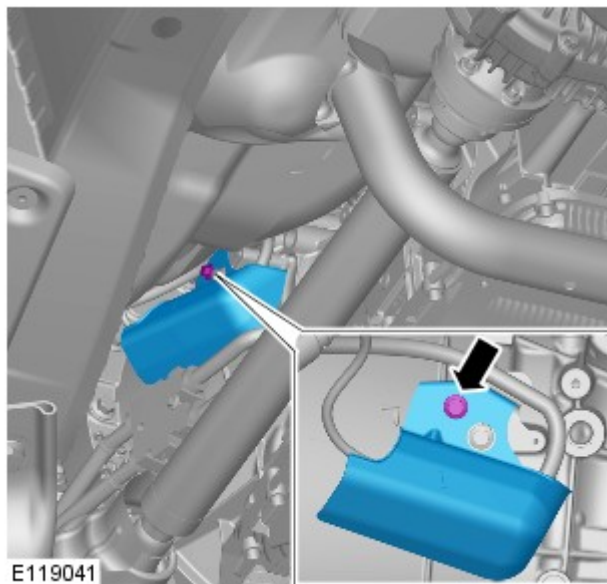

Torque: 11 Nm


4.

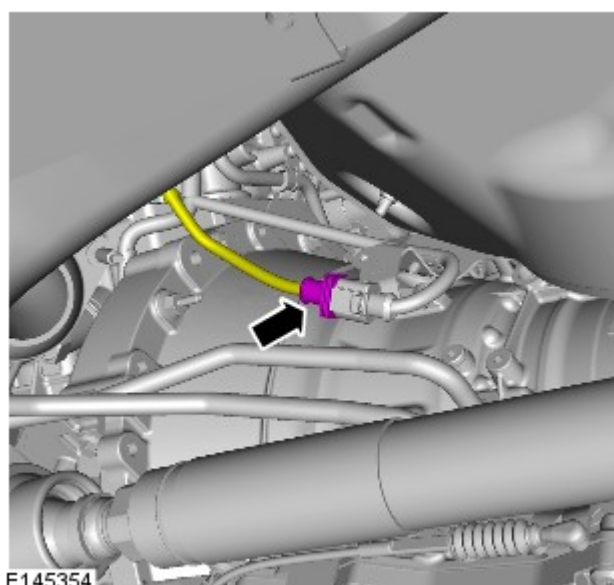

5.

⚠ CAUTION:

Make sure that the mating faces are clean and free of foreign material.

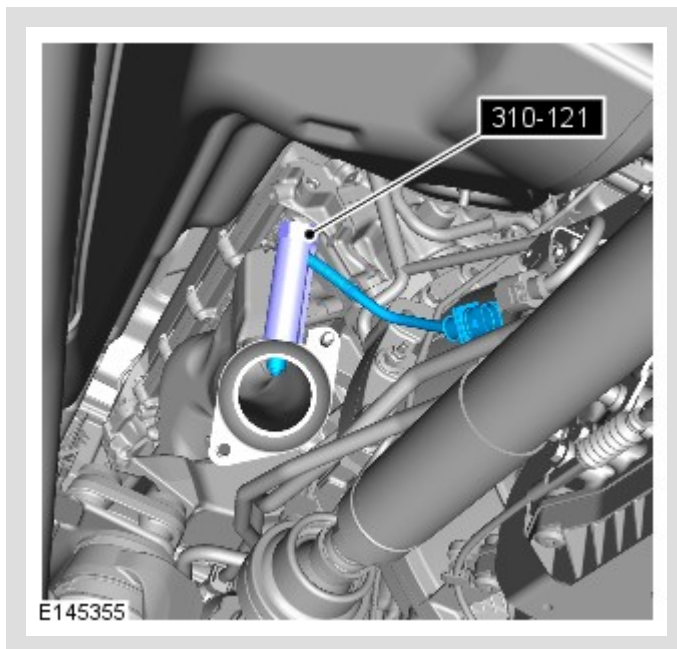

Special Tool(s): [310-121](#)

Torque: 48 Nm

INSTALLATION

1.



CAUTIONS:

- Make sure the anti-seize compound does not contact the HO2S tip.
- If accidentally dropped or knocked install a new sensor.
- Make sure the HO2S wiring harness is not twisted more than 180 degrees and is not in contact with either the exhaust or driveshaft.



NOTE:

If the original sensor is to be installed, apply lubricant meeting specification ESE-M12A4-A to the thread of the sensor.

To install, reverse the removal procedure.

2.

If a new component has been installed, configure using Land Rover approved diagnostic equipment.

