

PUBLISHED: 11-SEP-2012
2014.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

RIGHT CAMSHAFT POSITION SENSOR

(G1509606)

REMOVAL AND INSTALLATION

18.30.23	SENSOR - CAMSHAFT POSITION (CMP) - EXHAUST CAMSHAFT - RENEW	5000 CC, AJ V8, SUPERCHARGED	0.9	USED WITHINS	
----------	---	------------------------------------	-----	-----------------	--

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1. Disconnect the battery ground cable.
Refer to: Specifications (414-00 Battery and Charging System - General Information, Specifications).

2. WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

3. Refer to: Thermostat Housing - V8 S/C 5.0L Petrol (303-03 Engine Cooling - V8 5.0L Petrol/V8 S/C 5.0L Petrol, Removal and Installation).

4. NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.

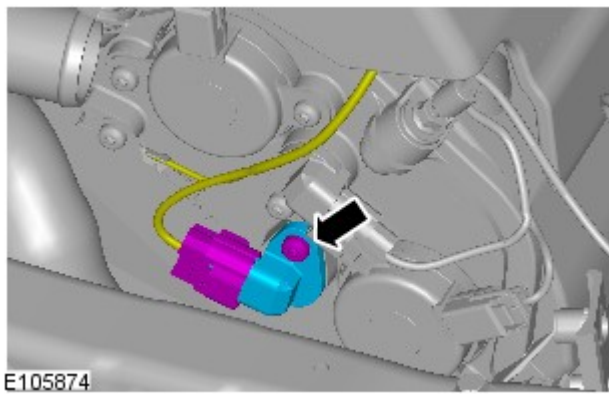

Torque: 10 Nm

INSTALLATION

1.



CAUTIONS:

- Make sure that the mating faces are clean and free of foreign material.
- Make sure that the sensor tip is clean and free of foreign material.



NOTE:

Lubricate the O-ring seal with clean engine oil.

To install, reverse the removal procedure.