

PUBLISHED: 31-JUL-2012
2014.0 RANGE ROVER (LG), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

RIGHT VARIABLE VALVE TIMING OIL CONTROL SOLENOID (G1509623)

REMOVAL AND INSTALLATION

18.31.36	VARIABLE EXHAUST VALVE TIMING SOLENOID - B BANK - RENEW	5000 CC, AJ V8, SUPERCHARGED	1	USED WITHINS	
----------	---	------------------------------------	---	-----------------	--

REMOVAL

NOTES:

- Removal steps in this procedure may contain installation details.
- Some variation in the illustrations may occur, but the essential information is always correct.

1. Disconnect the battery ground cable.
Refer to: Specifications (414-00, Specifications).


2.  **WARNING:**

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

3. Refer to: Thermostat Housing - V8 S/C 5.0L Petrol (303-03, Removal and Installation).

- 4.

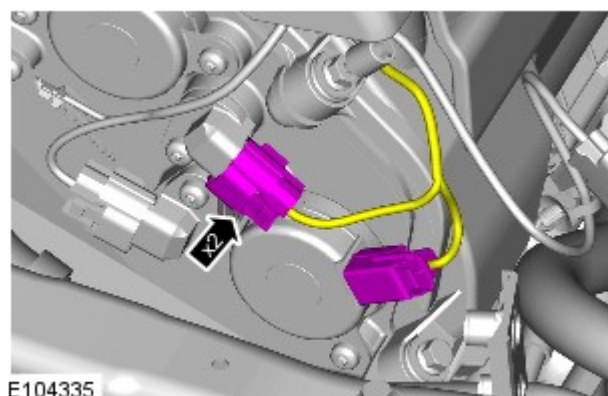

5.

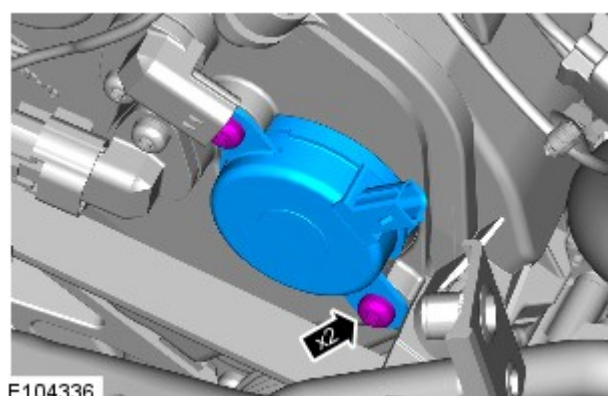


Torque: 10 Nm

6.



CAUTION:

Evenly and progressively, remove the VVT units from each side.

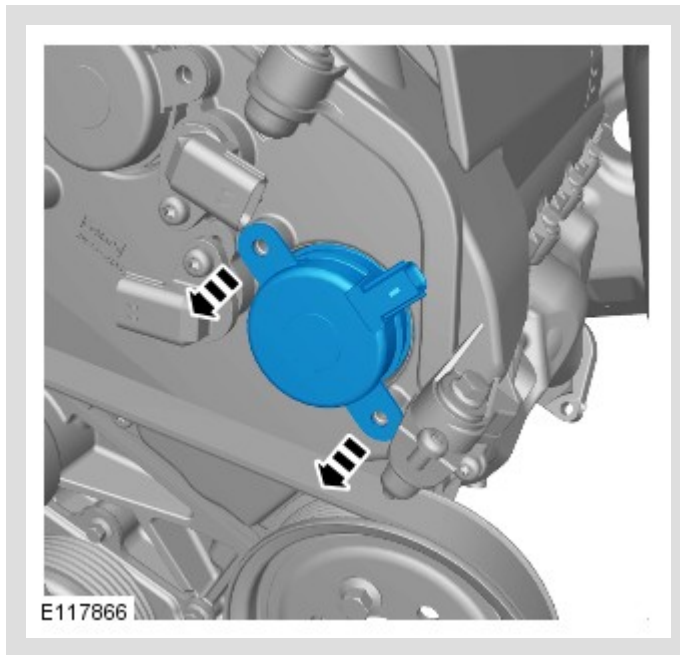

INSTALLATION

1.



CAUTION:

Make sure that the mating faces are clean and free of foreign material.



NOTE:

Lubricate the O-ring seal with clean engine oil.

To install, reverse the removal procedure.

