

2016.0 RANGE ROVER (LG), 303-01

ENGINE - TDV6 3.0L DIESEL - GEN 2/TDV6 3.0L DIESEL

CAMSHAFT REAR SEAL (G1509138)

REMOVAL AND INSTALLATION

12.13.06	OIL SEAL - REAR - CAMSHAFT - RENEW	3000 CC, TDV6	3.3	USED WITHINS	+
----------	---	------------------	-----	-----------------	---

REMOVAL

NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.


1. Refer to: [Rear End Accessory Drive](#) (303-05A Accessory Drive - TDV6 3.0L Diesel, Removal and Installation).

2.



Install the special tool.

3.

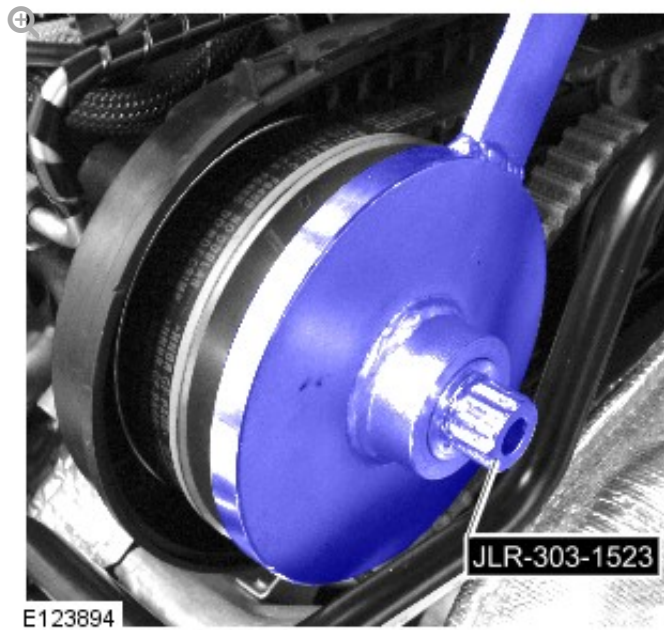

Install the special tool.


4.



Using the special tool, remove the rear camshaft pulley retaining bolt.

5. Remove the special tools.


6.

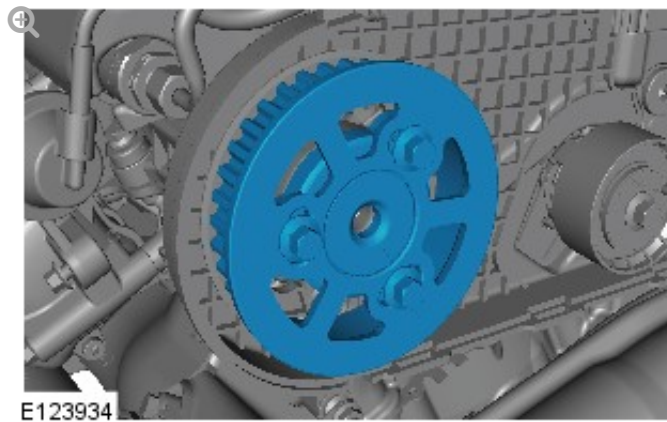

7.


CAUTION:

Make sure the special tool is correctly seated behind the camshaft seal. Failure to follow this instruction may result in damage to the special tool.

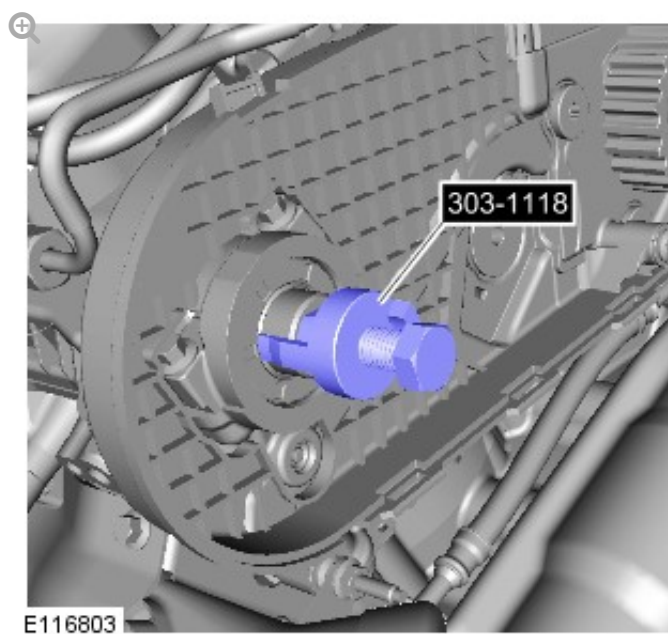


Install the special tool.

8.

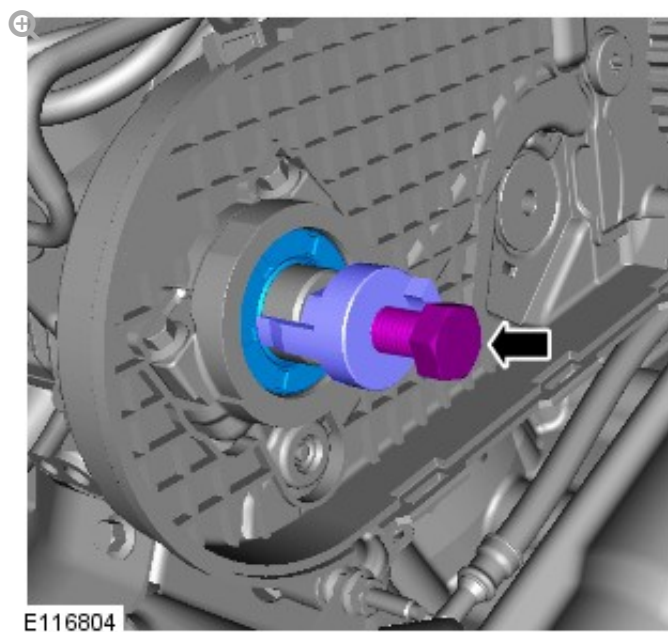

INSTALLATION

1.

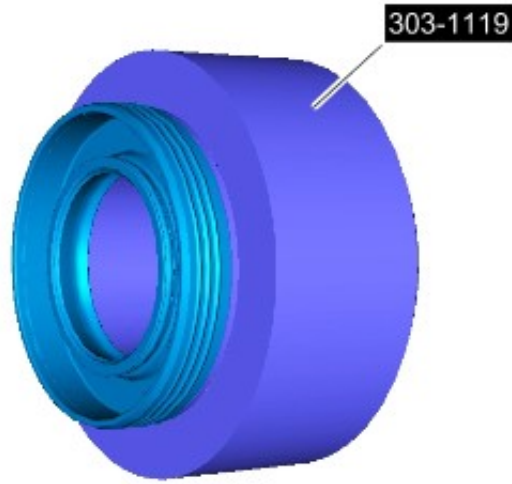

E116805

Install with the special tool.


2.

CAUTIONS:


- Make sure the seal is installed correctly.
- Make sure that the mating faces are clean and free of corrosion and foreign material.
- Do not use any lubricant on the camshaft rear seal or the camshaft. Failure to follow this instruction may result in damage to the vehicle.

NOTE:

Make sure that the seal is 1mm below the face of the cylinder head.

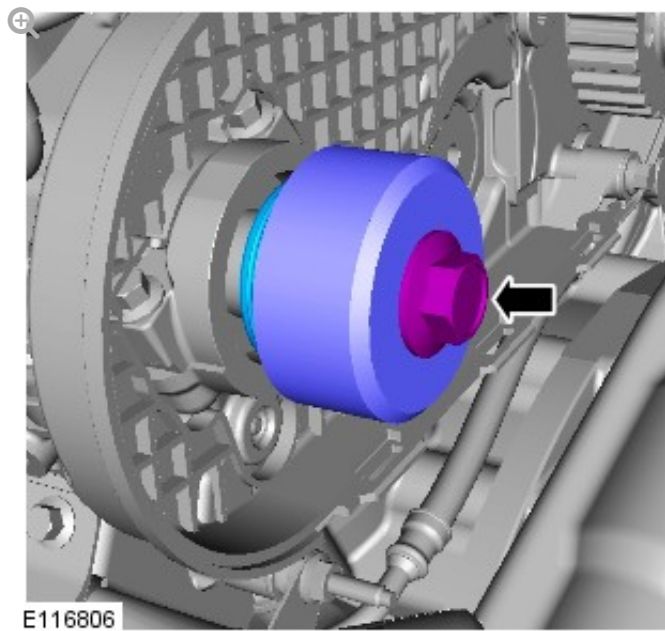

3.

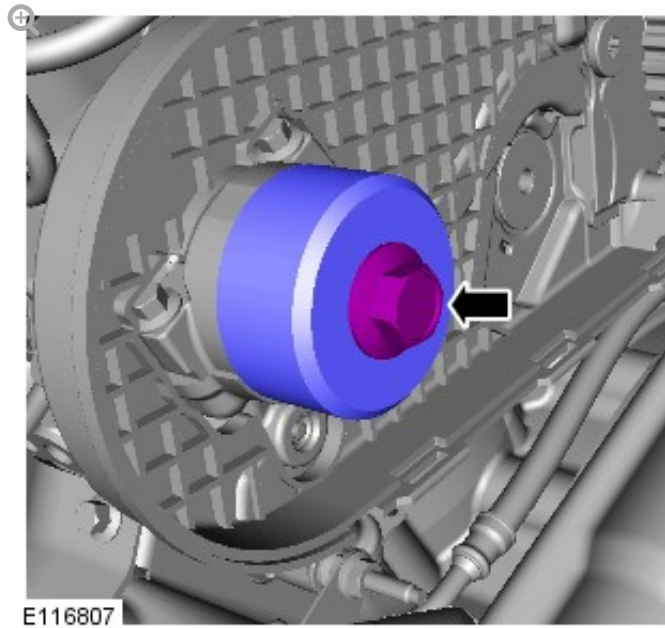


Remove the special tool.

4.

CAUTION:

Only tighten the bolt finger-tight at this stage.

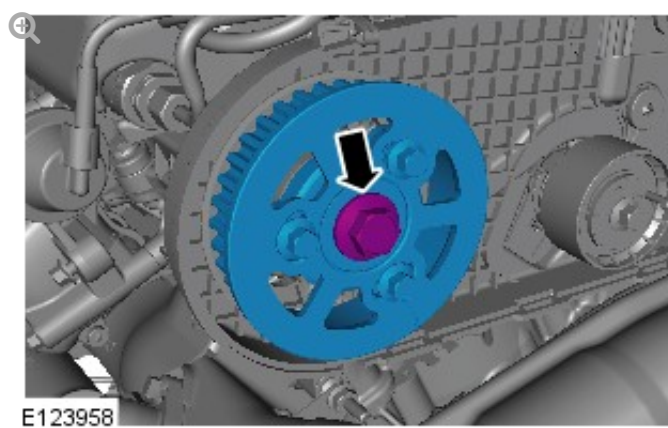


5.



Install the special tool.

6.

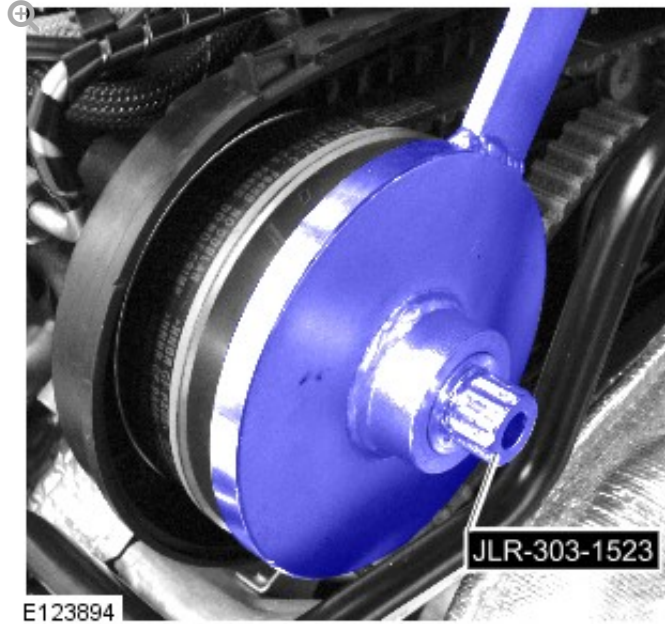


Install the special tool.

7.

CAUTION:

Make sure the torque wrench setting procedure is followed correctly. Failure to follow this instruction may result in damage to the vehicle.

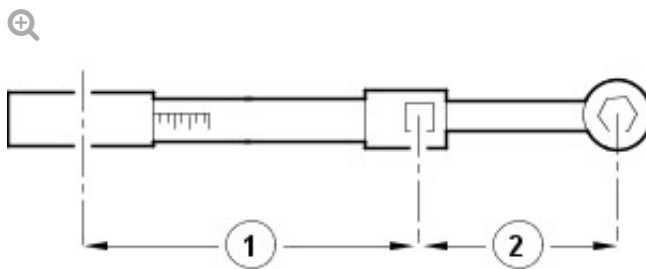

E37107

Calculate the setting for the torque wrench.

8.

CAUTION:

Make sure the torque wrench setting procedure is followed correctly. Failure to follow this instruction may result in damage to the vehicle.



- Using the special tool, install the camshaft rear pulley retaining bolt.
 - Stage one: Tighten to 80 Nm (59 lb.ft).
 - Stage two: Tighten a further 80 degrees.
9. Refer to: [Rear End Accessory Drive](#) (303-05A Accessory Drive - TDV6 3.0L Diesel, Removal and Installation).
10. Remove the special tools.