

2016.0 RANGE ROVER (LG), 303-01

ENGINE - TDV6 3.0L DIESEL - GEN 2/TDV6 3.0L DIESEL

TIMING COVER (G1509154)

REMOVAL AND INSTALLATION

12.65.03	COVER - TIMING BELT - RENEW	3000 CC, TDV6	2.3	USED WITHINS	+
----------	--------------------------------------	------------------	-----	-----------------	---

PART(S)


STEP	REPLACE PART / RENEW PART	PART NAME
Removal Step 13	Renew Part	Engine coolant pump pulley bolts

REMOVAL

1. Disconnect the battery ground cable.
Refer to: [Specifications](#) (414-00 Battery and Charging System - General Information, Specifications).
2. Refer to: [Cooling System Partial Draining and Vacuum Filling](#) (303-03C Engine Cooling - V8 N/A 5.0L Petrol/V8 S/C 5.0L Petrol, General Procedures).
3. Refer to: [Secondary Bulkhead Centre Panel - TDV6 3.0L Diesel](#) (501-02 Front End Body Panels, Removal and Installation).
4. Refer to: [Accessory Drive Belt Idler Pulley](#) (303-05E Accessory Drive - SDV6 3.0L Diesel - Hybrid Electric Vehicle, Removal and


Installation).

5.

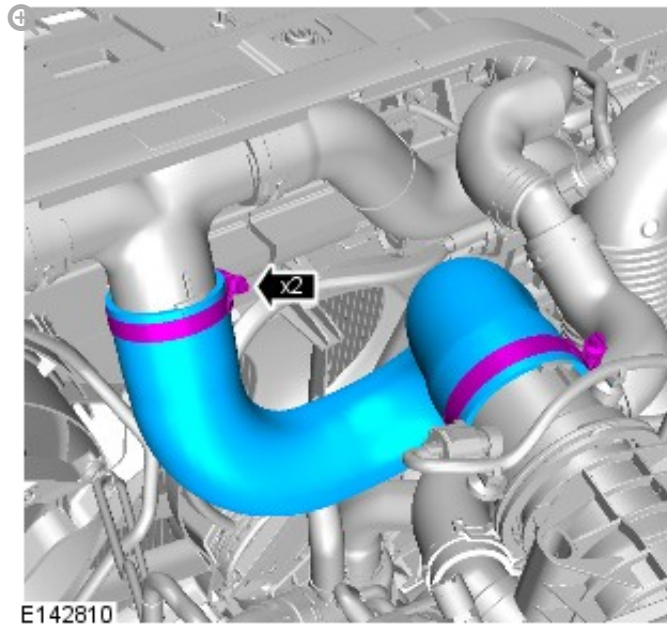


Torque: 3 Nm


6.

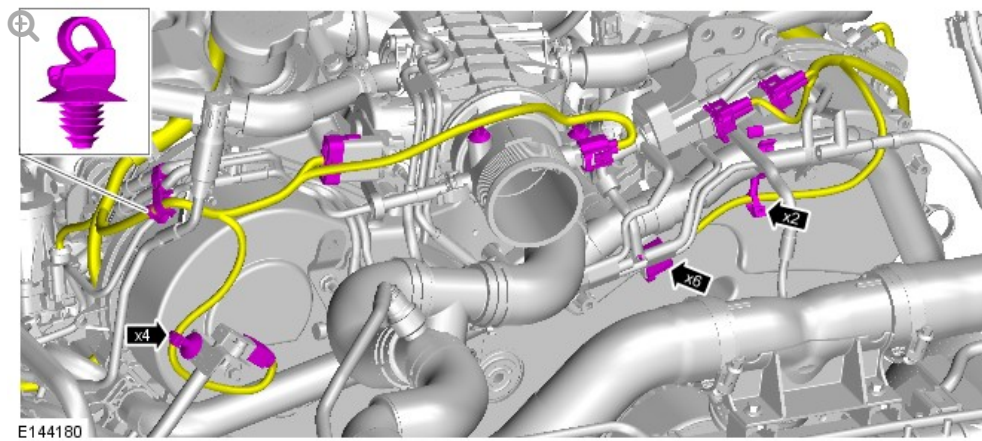

7.

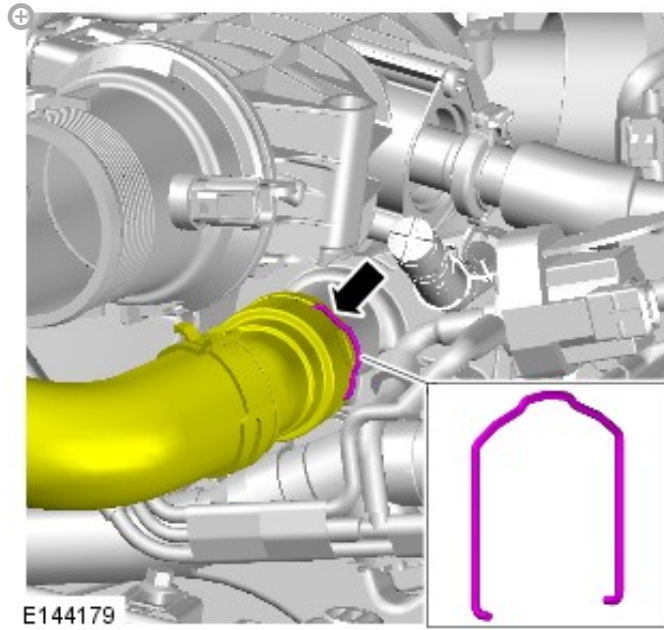


8.

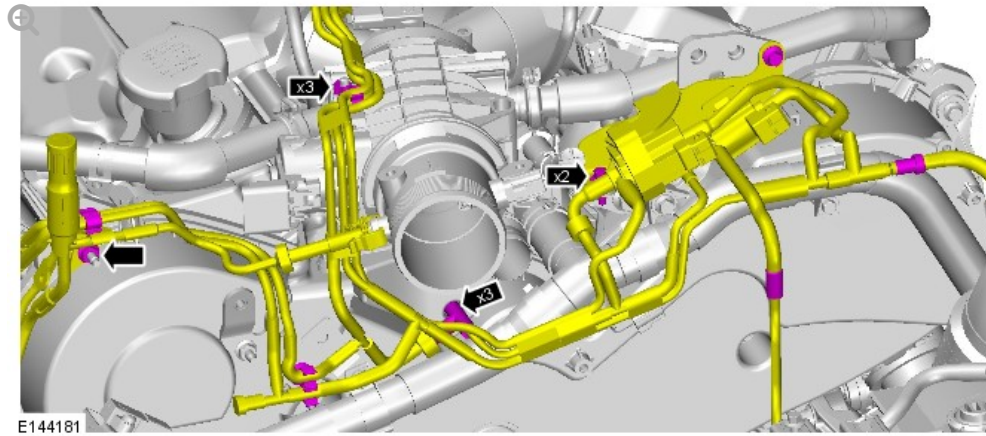


Torque: 8 Nm

9.

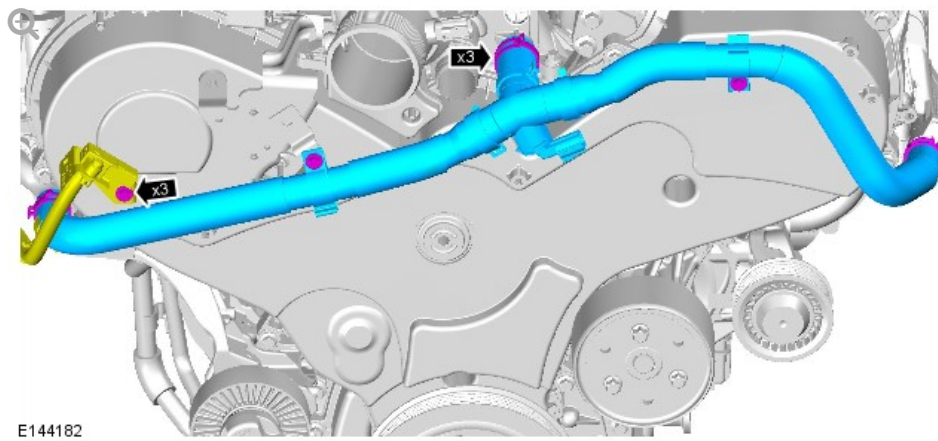


Torque: 8 Nm

10.

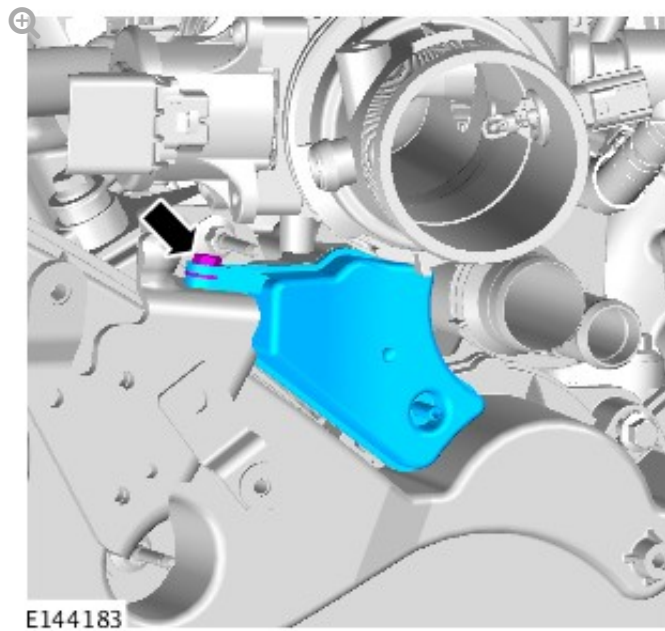


Torque: 8 Nm

11.

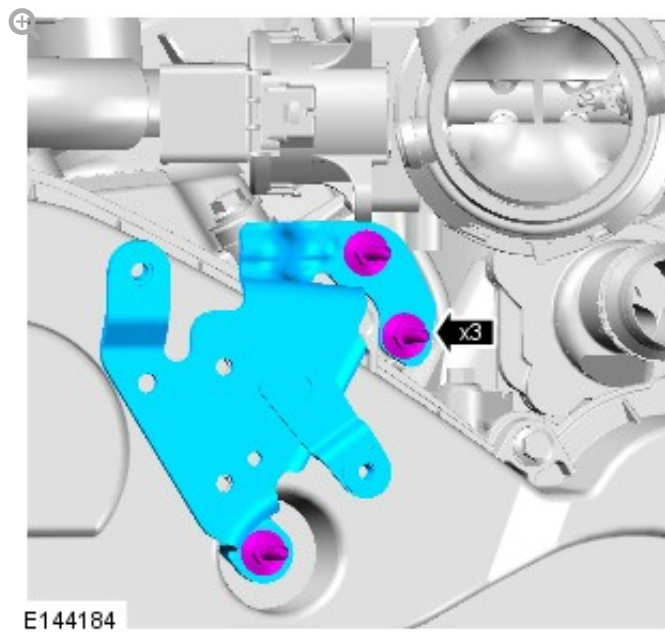

Torque: 8 Nm

12.

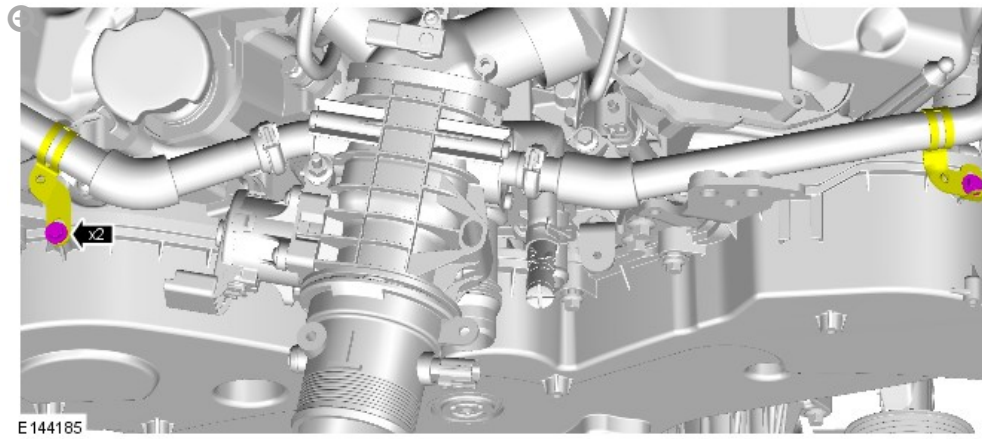


Torque: 8 Nm

13.


CAUTION:

Discard the bolts.

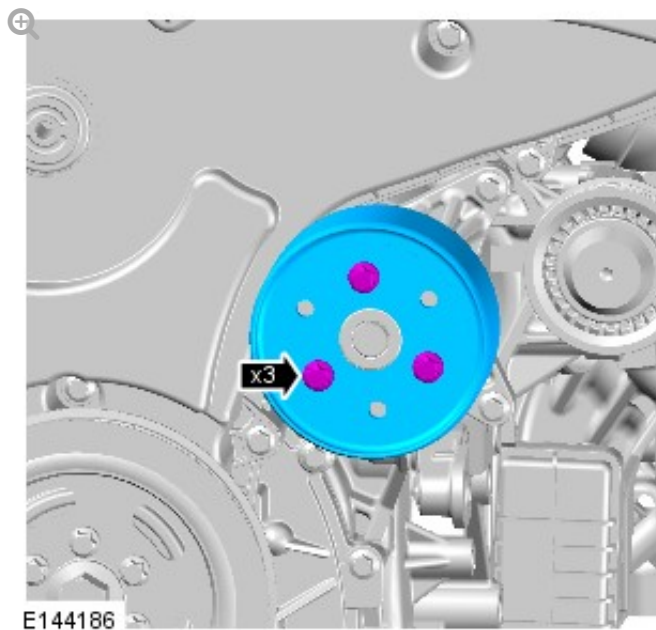


- Using a suitable 6mm bar, retain the coolant pump pulley.
- *Renew Part: [Engine coolant pump pulley bolts](#).*
Torque: 25 Nm

14.

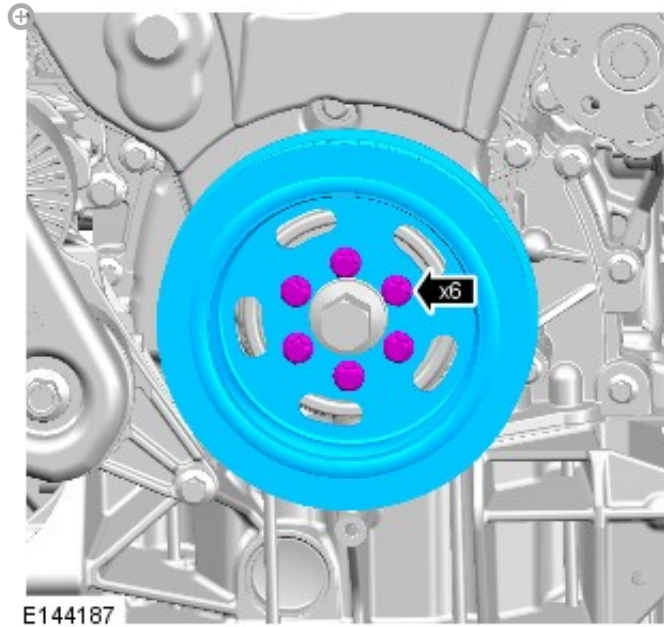

Torque: 25 Nm

15.

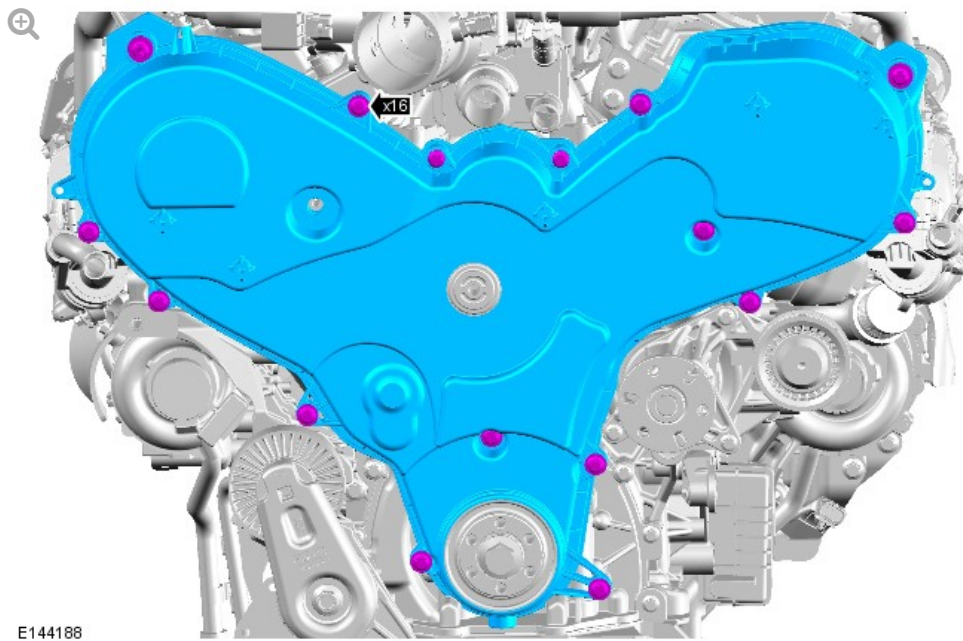

Torque: 10 Nm

INSTALLATION

1. To install, reverse the removal procedure.

