

PUBLISHED: 14-JUL-2017
2015.0 RANGE ROVER (LG), 303-01

ENGINE - TDV8 4.4L DIESEL

EXHAUST MANIFOLD CROSS-OVER PIPE (G1509171)

REMOVAL AND INSTALLATION

30.15.29	PIPE - CROSS- OVER - EXHAUST MANIFOLD - RENEW	4400 CC, TDV8	1.8	USED WITHINS	
----------	--	------------------	-----	-----------------	--

PART(S)

STEP	REPLACE PART / RENEW PART	PART NAME	
Installation Step 1	Renew Part	Exhaust manifold cross-over pipe studs	1

REMOVAL

1. Disconnect the battery ground cable.
Refer to: [Specifications](#) (414-01 Battery, Mounting and Cables, Specifications).
2. Refer to: [Engine Cover - 4.4L V8 - TdV8](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
3. Refer to: [Intake Manifold Plenum Chamber](#) (303-01E Engine - TDV8 4.4L Diesel, Removal and Installation).

4.  **WARNING:**

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

5. Refer to: [Exhaust System - Vehicles With: Diesel Particulate Filter \(DPF\)](#) (309-00D Exhaust System - TDV8 4.4L Diesel, Removal and Installation).

- 6.

Refer to: [Exhaust System - Vehicles Without: Diesel Particulate Filter \(DPF\)](#)
(309-00D Exhaust System - TDV8 4.4L Diesel, Removal and Installation).

7.

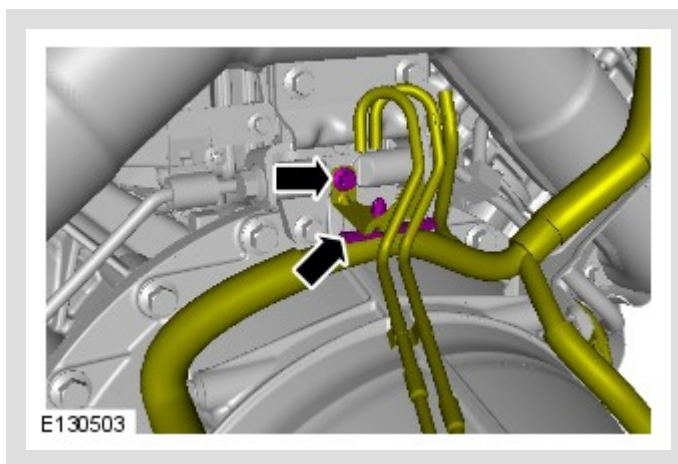


8.




NOTE:

Loosen the bolt, but do not fully remove.

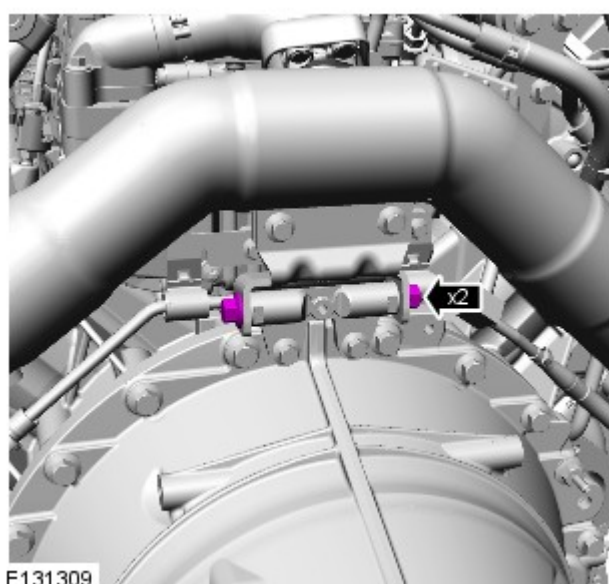



E131309

9.

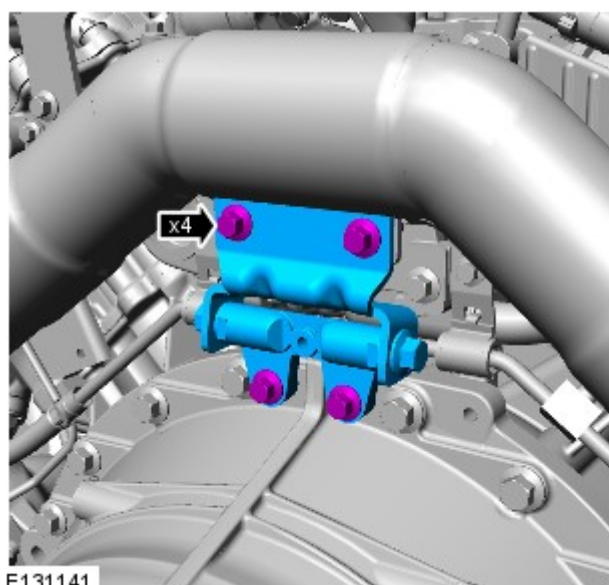


E131141

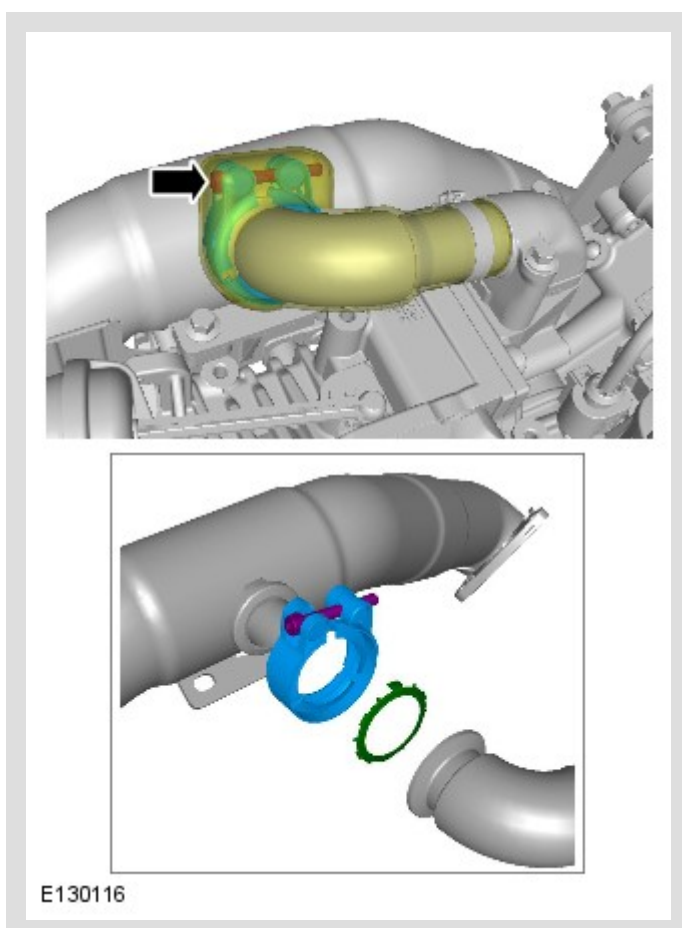


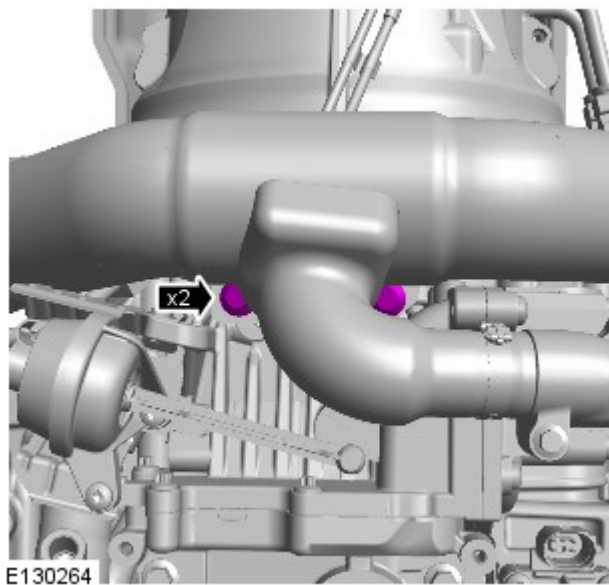

12.

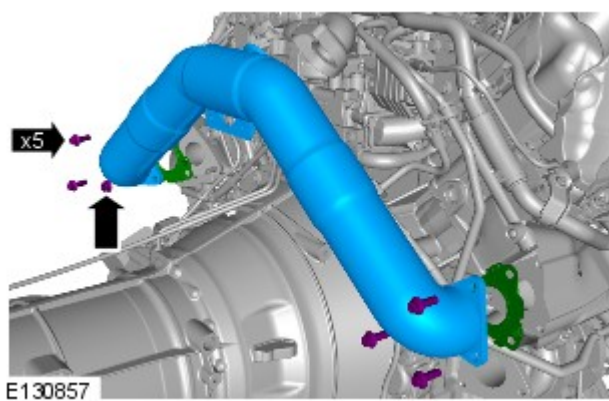

13.

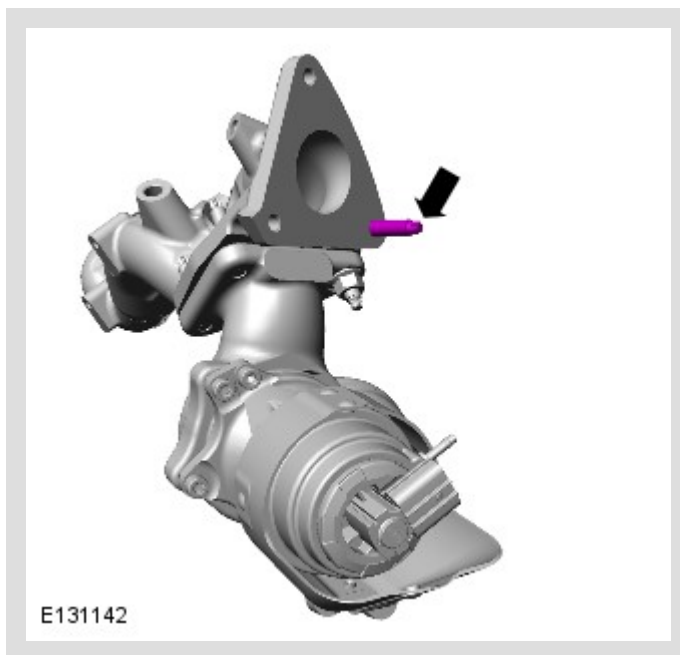

Remove and discard the stud.


INSTALLATION

1.



CAUTION:

Make sure a new stud is installed

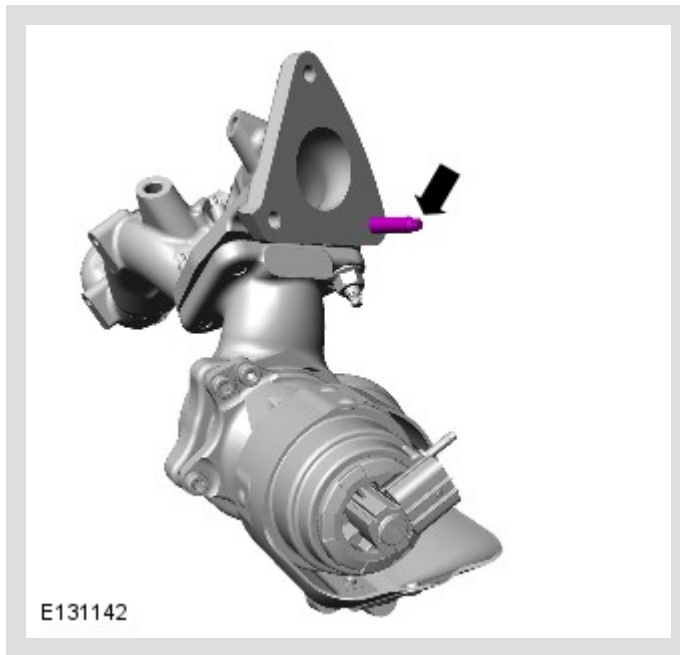


Renew Part: *Exhaust manifold cross-over pipe studs : 1 .*

Torque: 13 Nm

2.

ⓘ CAUTIONS:

- Make sure that the mating faces are clean and free of foreign material.
- The bolts and nut must be re-torqued after 20 minutes.
- Install the nut and bolts finger tight before final tightening.

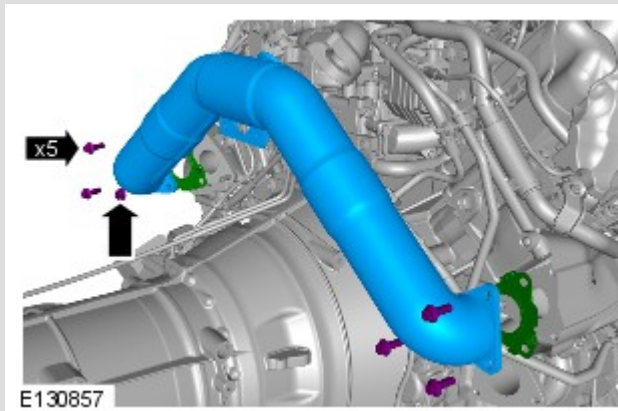


Torque:

Bolts 23 Nm



nut 28 Nm

3.

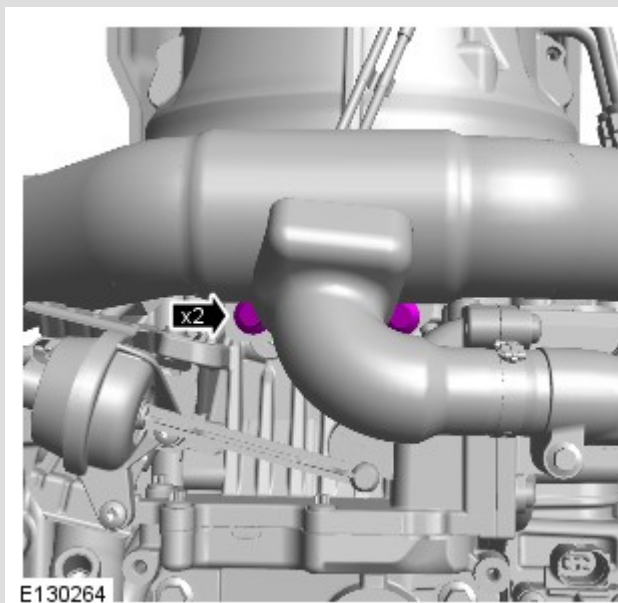


Torque: 23 Nm

4.

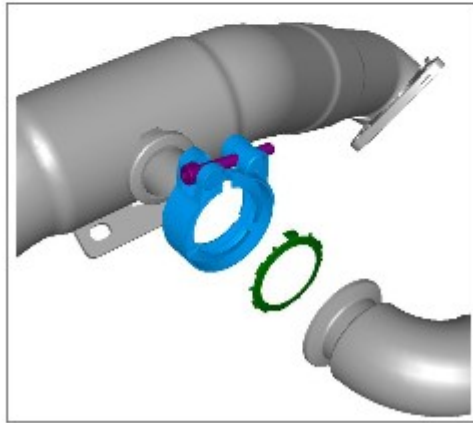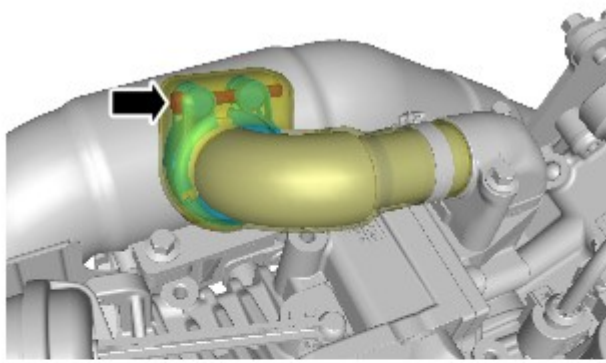


E130116

Torque: 7 Nm

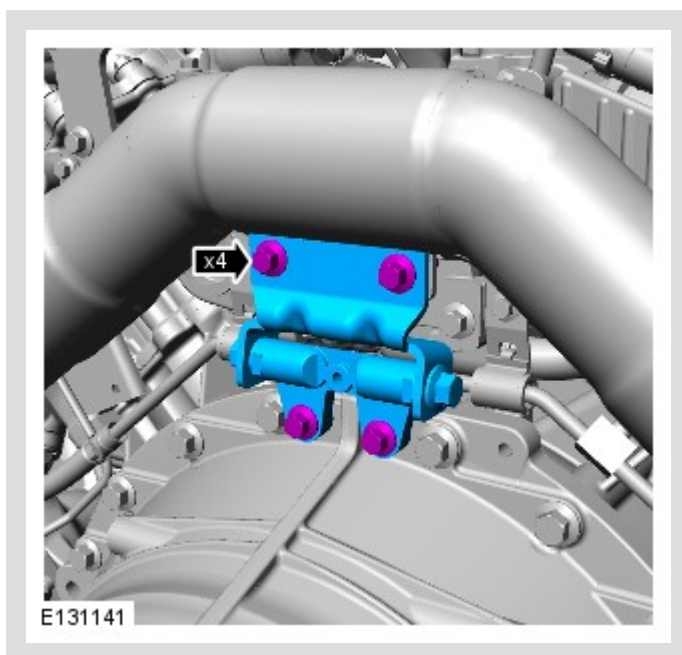


Torque: 23 Nm

6.

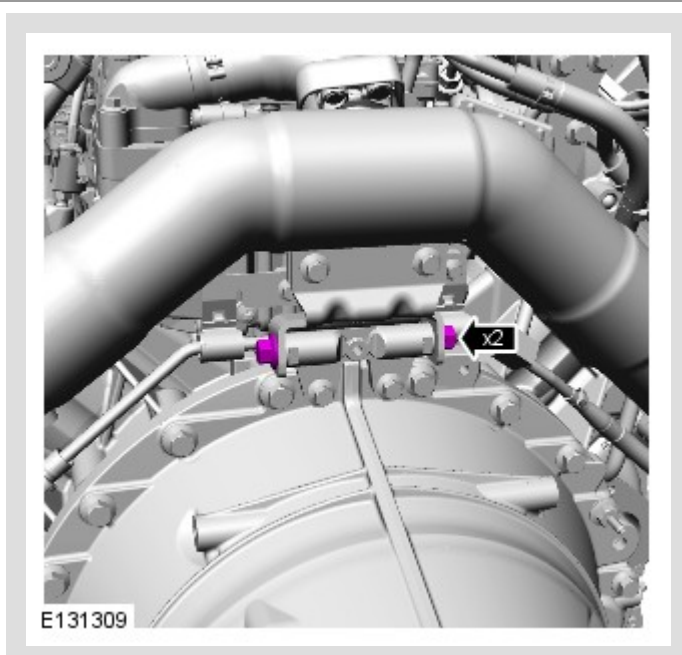

Torque: 23 Nm

7.

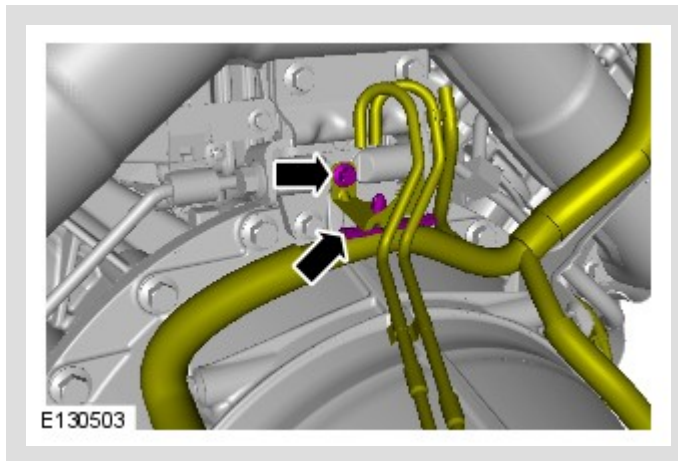

Torque: 10 Nm

8.

Refer to: [Exhaust System - Vehicles Without: Diesel Particulate Filter \(DPF\)](#) (309-00D Exhaust System - TDV8 4.4L Diesel, Removal and Installation).

9.

Refer to: [Exhaust System - Vehicles With: Diesel Particulate Filter \(DPF\)](#) (309-00D Exhaust System - TDV8 4.4L Diesel, Removal and Installation).

10.

Refer to: [Intake Manifold Plenum Chamber](#) (303-01E Engine - TDV8 4.4L Diesel, Removal and Installation).

11.

Refer to: [Engine Cover - 4.4L V8 - TdV8](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

12.

Connect the battery ground cable.

Refer to: [Specifications](#) (414-01 Battery, Mounting and Cables, Specifications).