

PUBLISHED: 24-AUG-2017
2015.0 RANGE ROVER (LG), 303-01


ENGINE - TDV8 4.4L DIESEL

FLEXPLATE (G1509174)

REMOVAL AND INSTALLATION

12.53.13	DRIVE PLATE - AUTOMATIC - RENEW	4400 CC, TDV8, WITH PARTICULATE FILTER	6.8	USED WITHINS	
----------	--	---	-----	-----------------	--

SPECIAL TOOL(S)

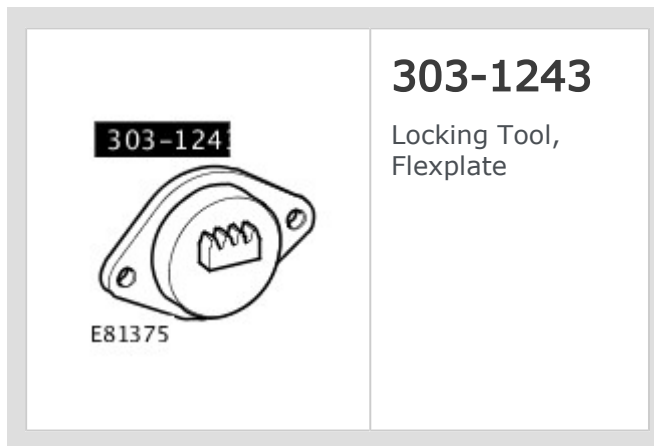

PART(S)

STEP	REPLACE PART / RENEW PART	PART NAME	
Installation Step 1	Renew Part	Flexplate bolts	8

REMOVAL



NOTES:

- Removal steps in this procedure may contain installation details.
- Some variation in the illustrations may occur, but the essential information is always correct.

1.



WARNING:


Do not work on or under a vehicle supported only by a jack. Always support the vehicle on safety stands.

Raise and support the vehicle.

2.


Refer to: [Transmission - TDV8 4.4L Diesel](#) (307-01B Automatic Transmission /Transaxle - Vehicles With: 8HP70 8-Speed Automatic Transmission AWD, Removal).

3.

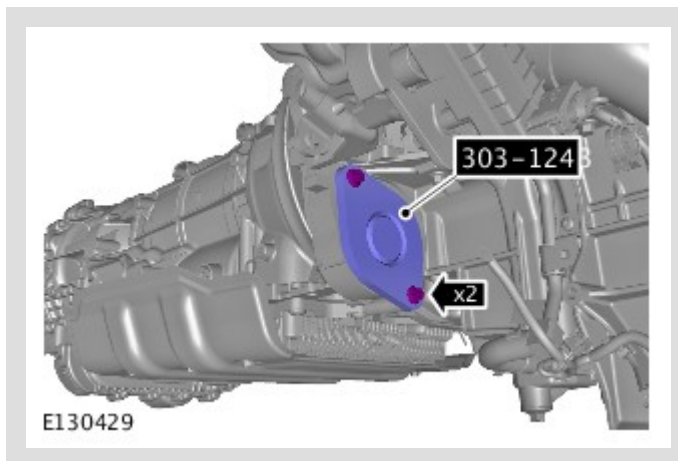

Special Tool(s): [303-1243](#)

4.

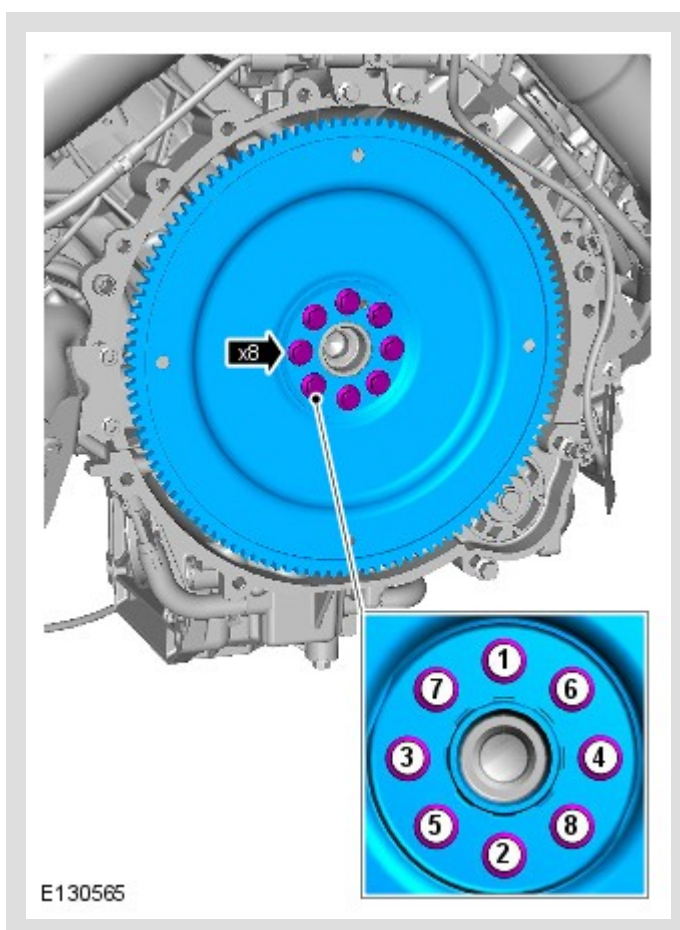

- Discard the bolts.


INSTALLATION

1.



NOTE:

Make sure that new bolts are installed.

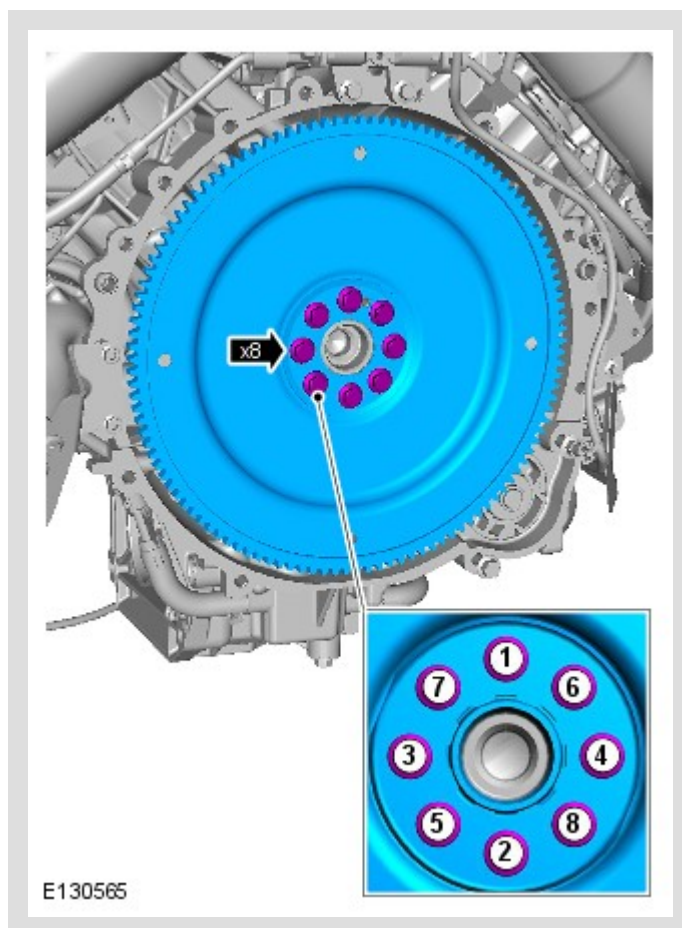

To install, reverse the removal procedure.

Renew Part: *Flexplate bolts* : 8 .

Torque:

Stage 1: 15 Nm

Stage 2: 35°

Stage 3: 15°