

PUBLISHED: 16-AUG-2017
2015.0 RANGE ROVER (LG), 303-01

ENGINE - TDV8 4.4L DIESEL

LEFT ENGINE MOUNT (G1509169)

REMOVAL AND INSTALLATION

12.45.11	MOUNTING - LH - RENEW	4400 CC, TDV8	4.4	USED WITHINS	
----------	-----------------------------	------------------	-----	-----------------	--

PART(S)

STEP	REPLACE PART / RENEW PART	PART NAME	
Installation Step 6	Renew Part	Engine mounting bracket to subframe bolts	1

REMOVAL



NOTES:

- Removal steps in this procedure may contain installation details.
- Some variation in the illustrations may occur, but the essential information is always correct.
- Engine shown removed for clarity.

1. Disconnect the battery ground cable.

Refer to: [Specifications](#) (414-00 Battery and Charging System - General Information, Specifications).

2.



WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


3.

Refer to: [Fender Splash Shield](#) (501-02 Front End Body Panels, Removal and Installation).


4.

Refer to: [Air Conditioning Compressor - TDV8 4.4L Diesel](#) (412-01A Climate Control, Removal and Installation).


5.

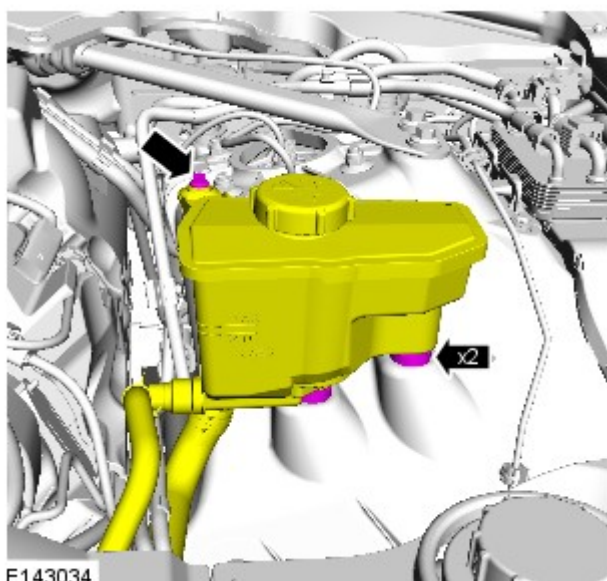


6.

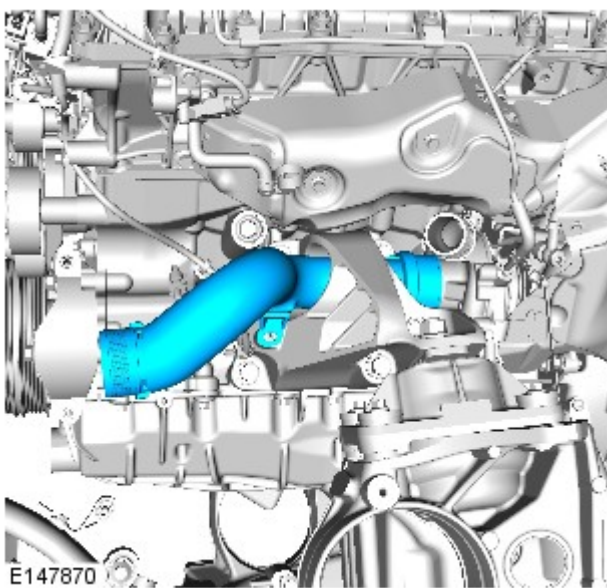


7.

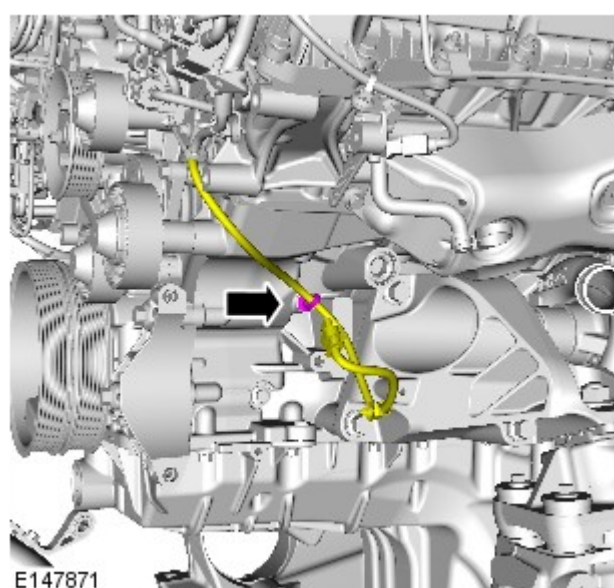

8.

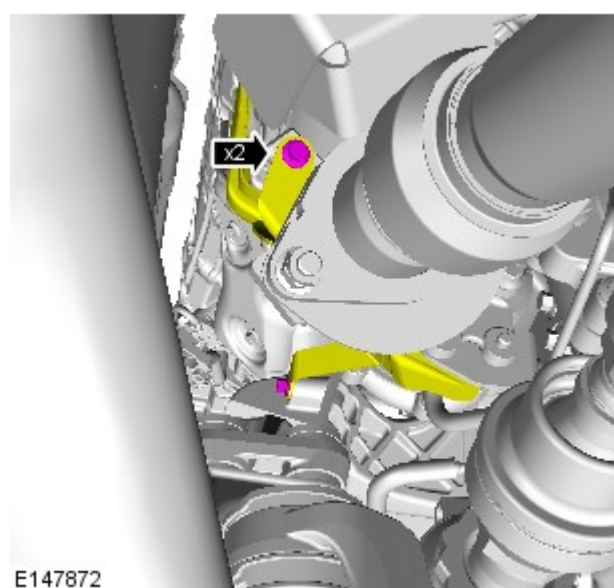


9.

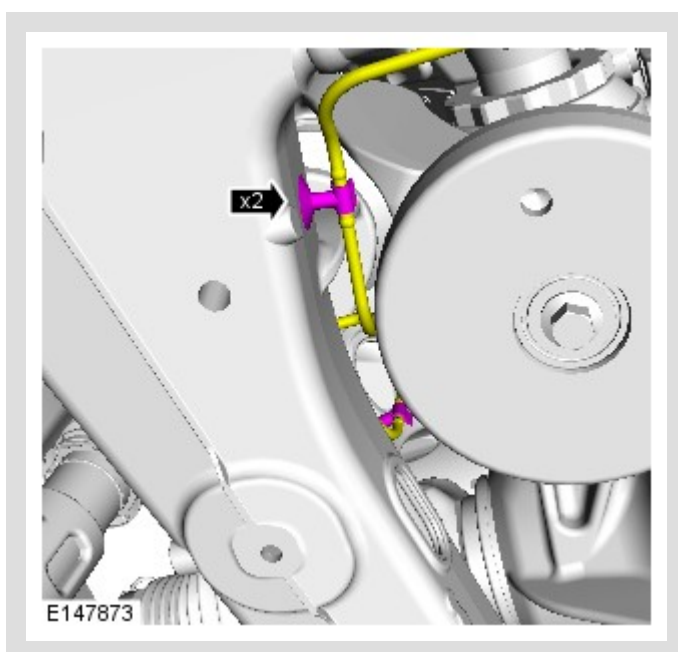

10.

⚠ CAUTION:


Discard the bolts.

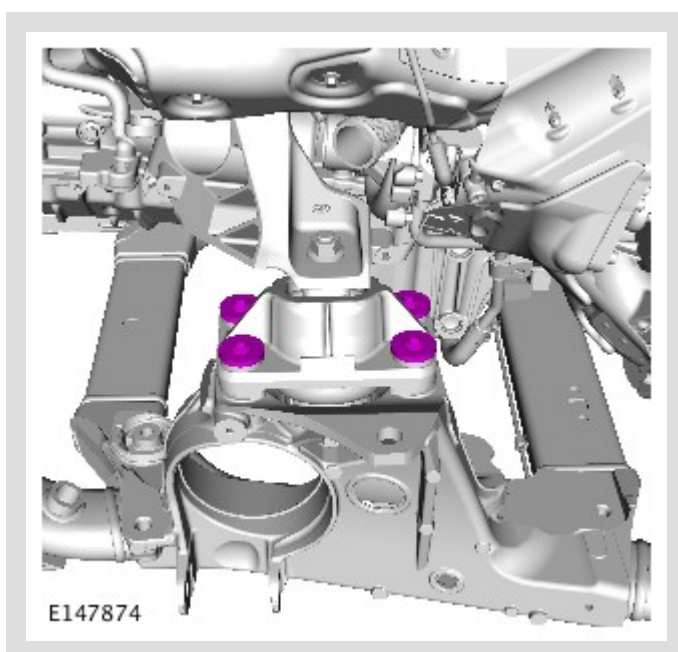

11.

ⓘ CAUTION:


Use a wooden block to protect the oil pan when supporting the engine.

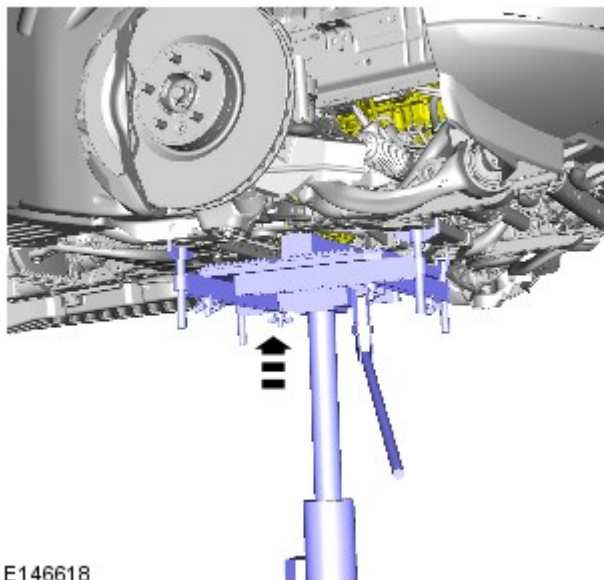

E146618


Using a suitable hydraulic jack, raise and support the engine.

12.

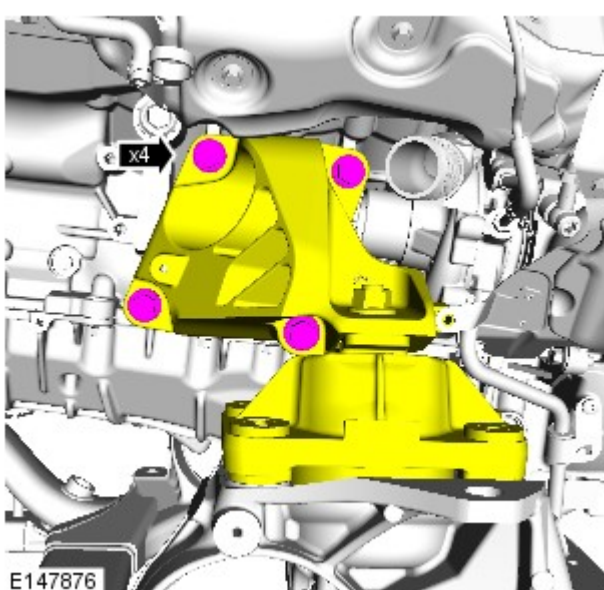


E147876


13.

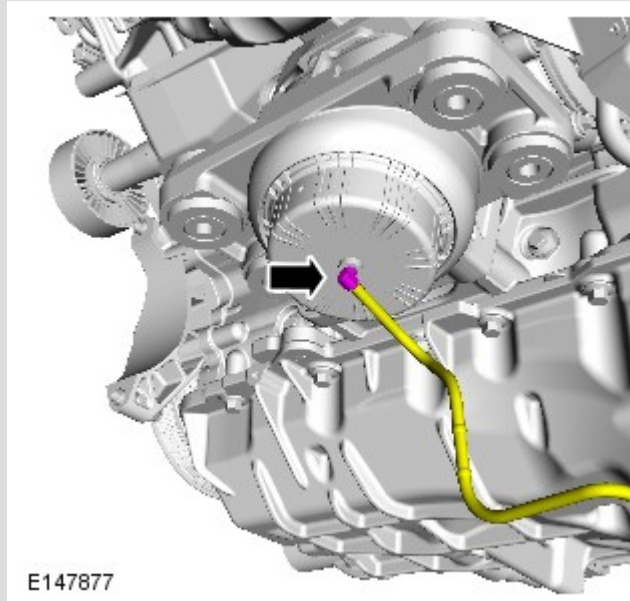

14.

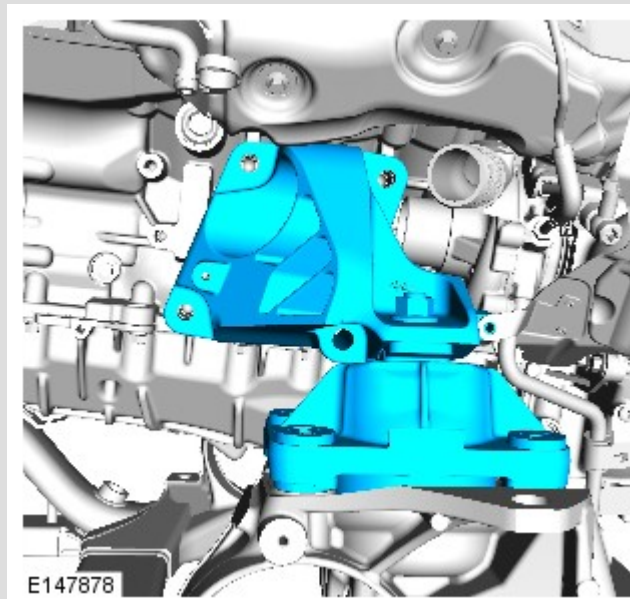

15.

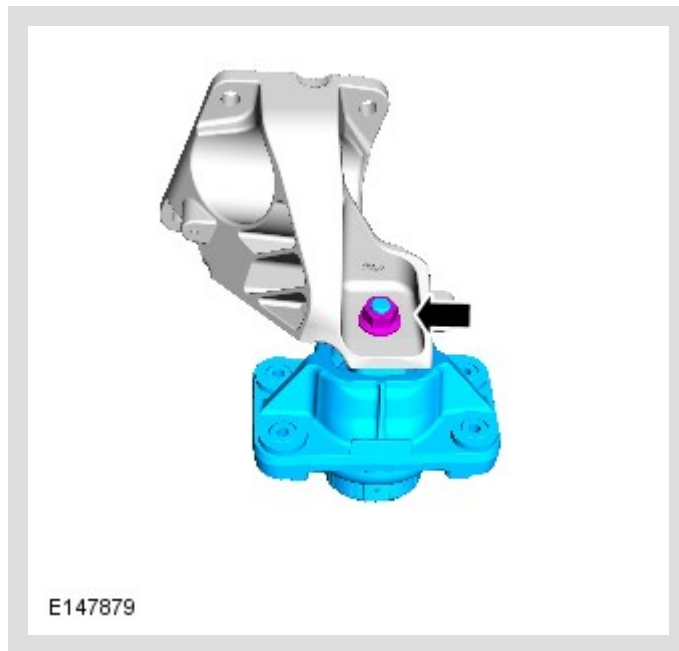


INSTALLATION

1.


⚠ CAUTION:

Only tighten the nut finger tight at this stage.

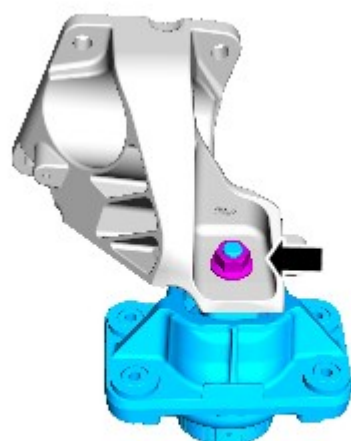


E147879

2.

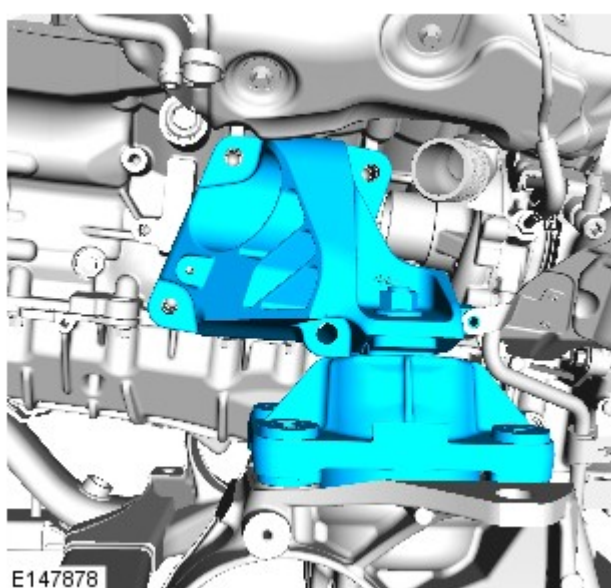


E147878

3.

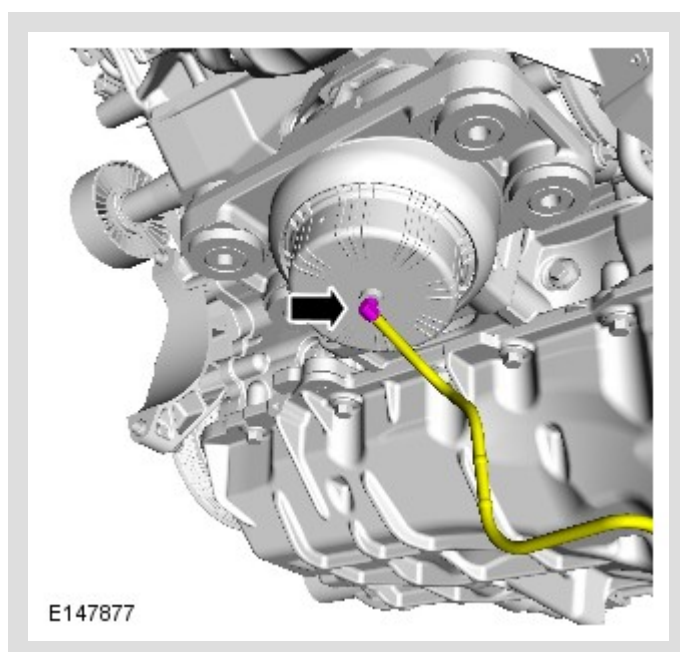

4.

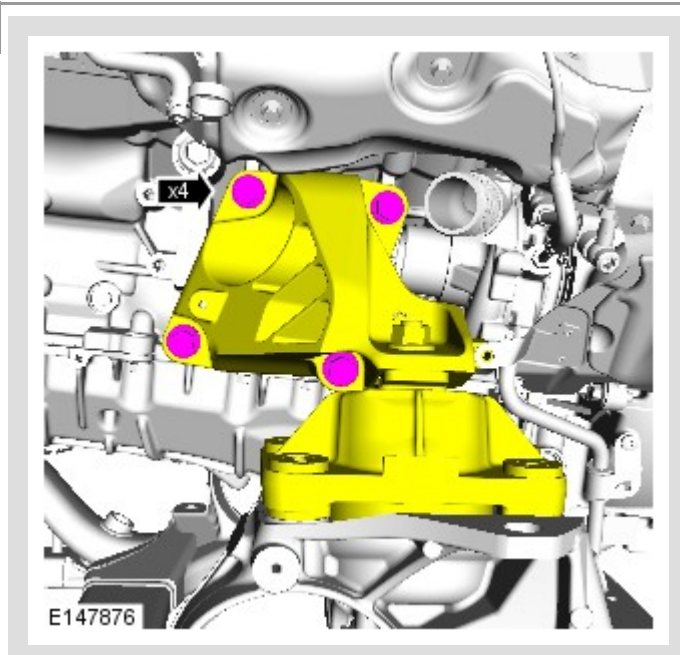

Torque: 115 Nm

5.


Lower the engine onto the mount.

6.



CAUTIONS:

- Make sure new bolts are installed.
- Only tighten the bolts finger tight at this stage.

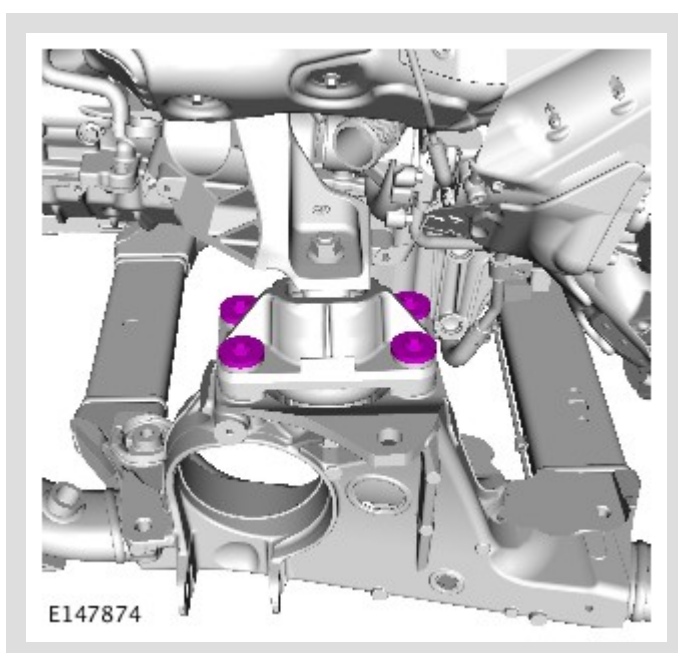


Renew Part: *Engine mounting bracket to subframe bolts : 1* .

7.




NOTE:

Tighten the bolts in the sequence shown.

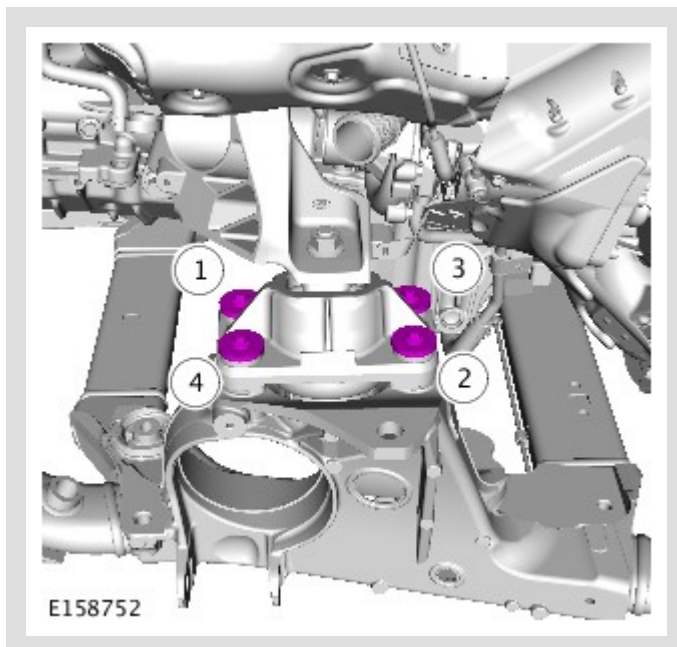


Torque: 40 Nm

8.

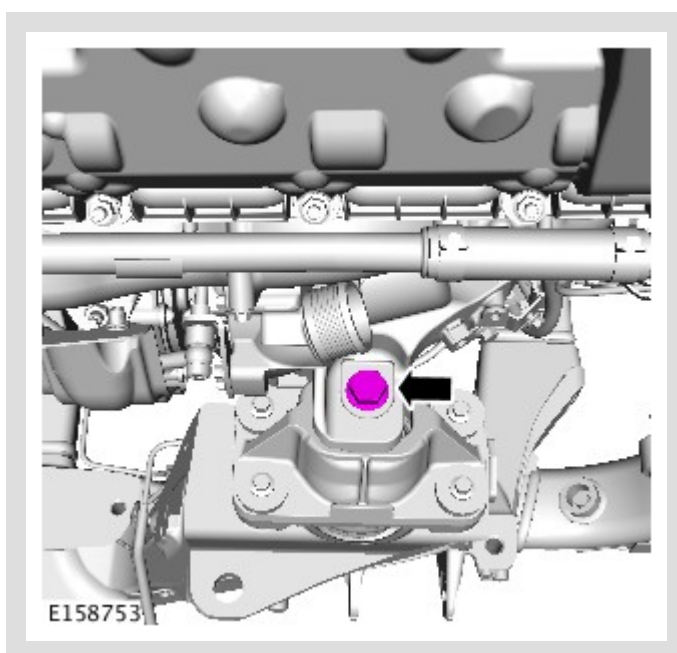


Torque: 130 Nm

9.

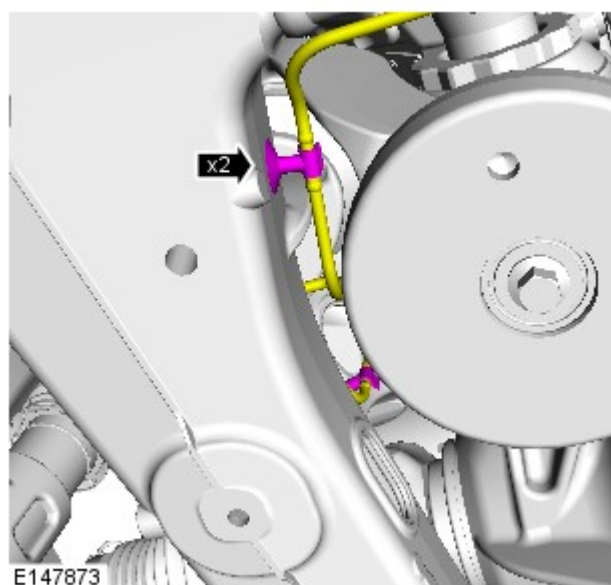


10.

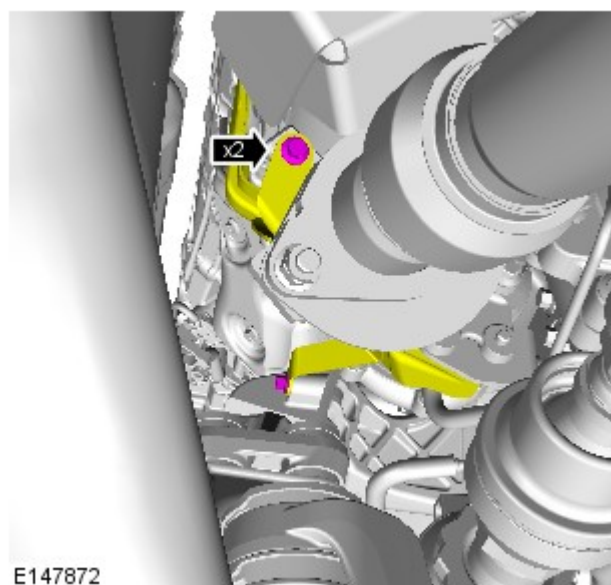


Torque: 9 Nm


11.

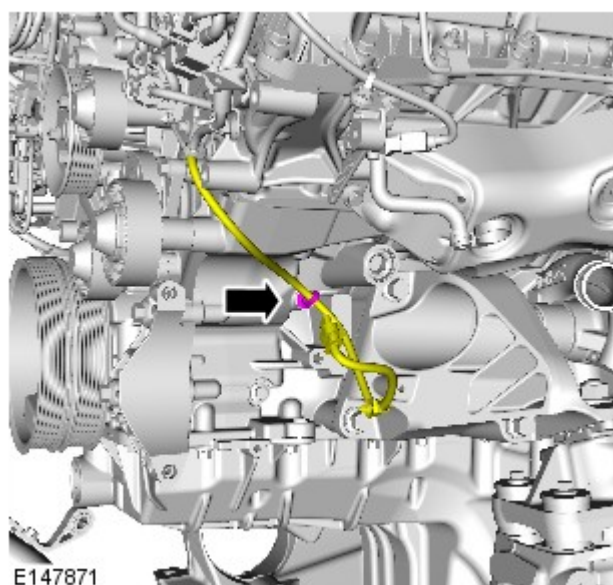

12.

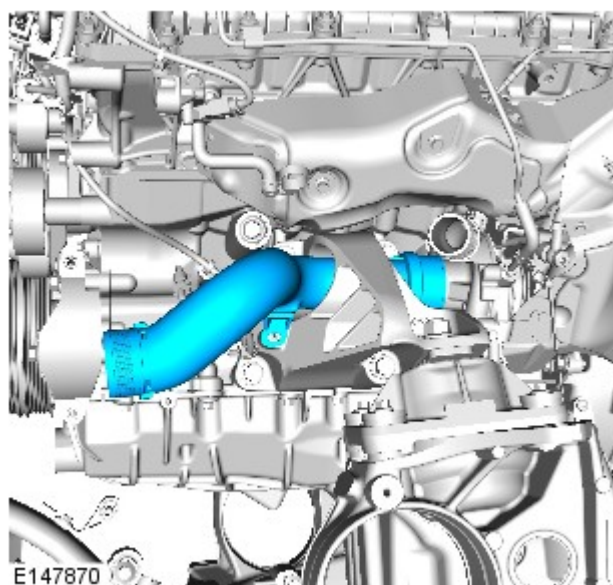

13.

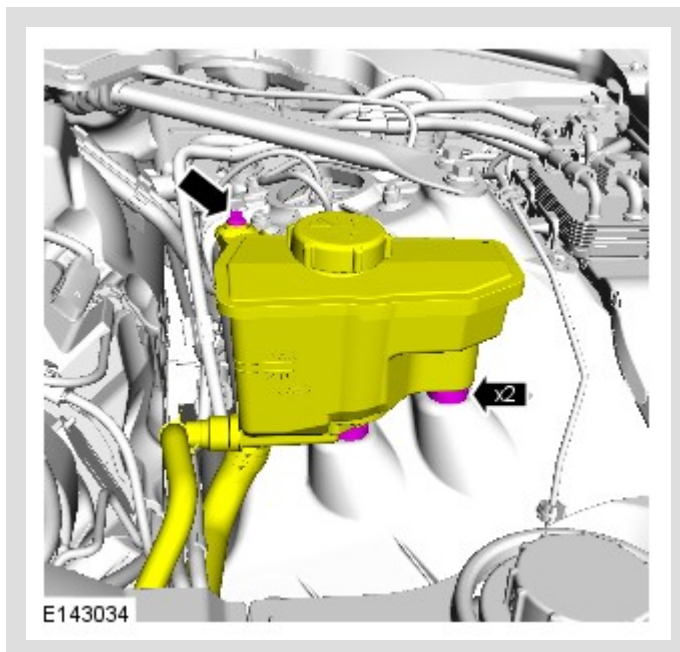

Torque: 9 Nm

14. Refer to: [Air Conditioning Compressor - TDV8 4.4L Diesel](#) (412-01A Climate Control, Removal and Installation).

15. Refer to: [Fender Splash Shield](#) (501-02 Front End Body Panels, Removal and Installation).

16. Connect the battery ground cable.
Refer to: [Specifications](#) (414-00 Battery and Charging System - General Information, Specifications).