

PUBLISHED: 14-AUG-2017
2014.0 RANGE ROVER (LG), 303-01

ENGINE - V8 S/C 5.0L PETROL

FLEXPLATE (G1509350)

REMOVAL AND INSTALLATION

12.53.13

DRIVE
PLATE -
AUTOMATIC
- RENEW

5000 CC, AJ
V8,
SUPERCHARGED

5.6

USED
WITHINS

PART(S)

STEP	PART NAME	QUANTITY
Removal Step 4	Flexplate bolts	10

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1. Disconnect the battery ground cable.
Refer to: Specifications (414-00 Battery and Charging System - General Information, Specifications).

WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

3. Refer to: Transmission - V8 N/A 5.0L Petrol/V8 S/C 5.0L Petrol (307-01 Automatic Transmission/Transaxle - Vehicles With: 8HP70 8-Speed Automatic Transmission AWD, Removal).


CAUTIONS:

- Install all the bolts finger tight before final tightening.

- The bolts can only be used 3 times, mark the bolts with a center punch. If 2 punch marks are visible, discard the bolts.
- Make sure that no components fall off during removal.
- Install the bolts in the noted position.

NOTES:

- Make sure the crankshaft and flexplate mating faces are clean before installation.
- Make sure that the crankshaft is not rotated.
- Tighten the retaining bolts working diagonally.

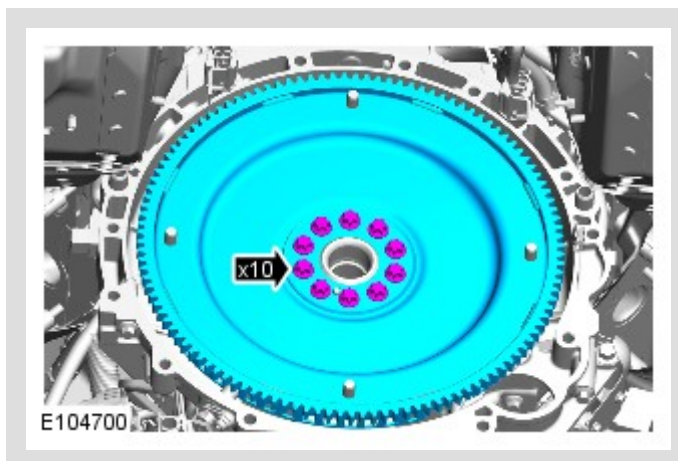

Renew Part: *Flexplate bolts* Quantity: 10 .

Torque:

Stage 1: 45 Nm

Stage 2: 90°

INSTALLATION

1. To install, reverse the removal procedure.