

PUBLISHED: 10-SEP-2012
2014.0 RANGE ROVER (LG), 303-01

ENGINE - V8 S/C 5.0L PETROL

FUEL PUMP CAMSHAFT (G1509359)

REMOVAL AND INSTALLATION

12.65.13	TIMING CHAIN, GEARS AND TENSIONER - RENEW	5000 CC, AJ V8, SUPERCHARGED	12.5	USED WITHINS	
----------	--	------------------------------------	------	-----------------	--

REMOVAL

NOTE:

Some illustrations may show the engine removed for clarity.

1. Disconnect the battery ground cable.
Refer to: Specifications (414-00 Battery and Charging System - General Information, Specifications).


2. WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

3. Refer to: Oil Pan Extension (303-01 Engine - V8 S/C 5.0L Petrol, Removal and Installation).


4.

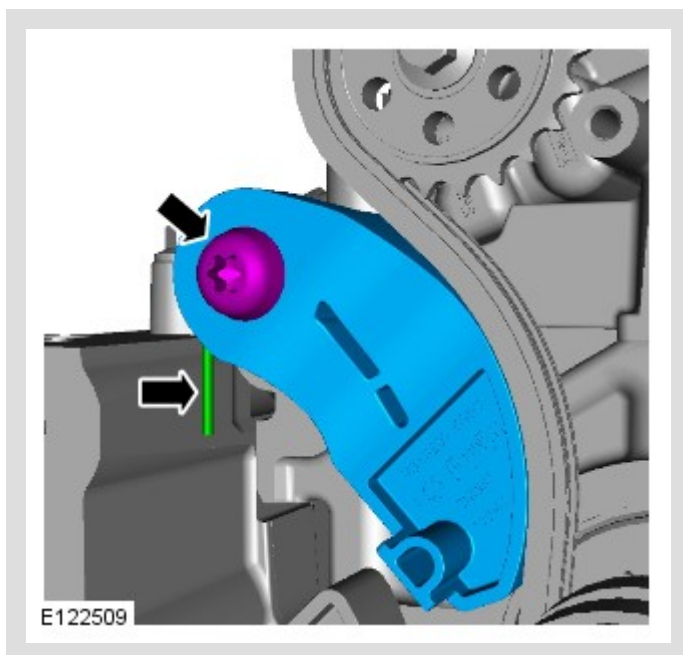

5.

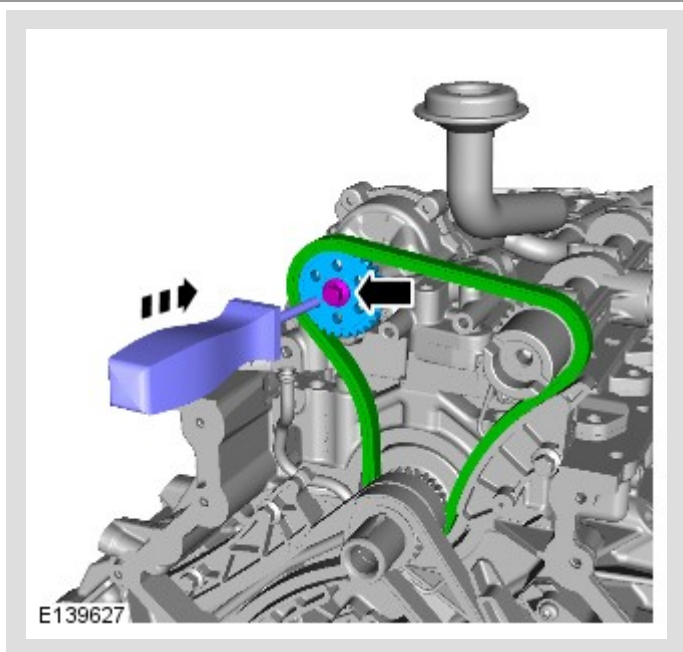


6.

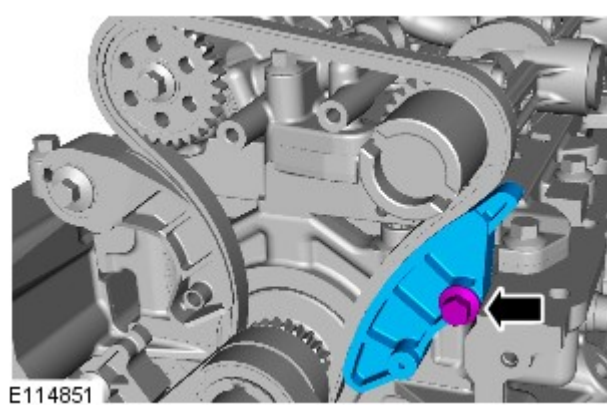

7.

⚠ CAUTION:

Take extra care when removing the component, prevent damage to the mating faces.

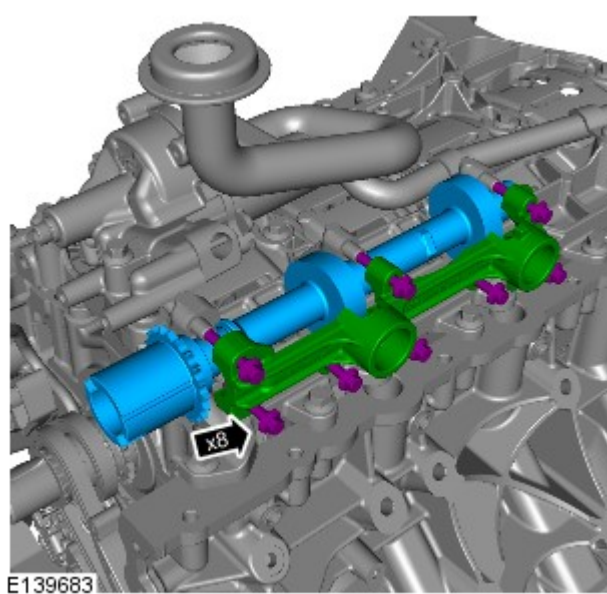


INSTALLATION

1.

⚠ CAUTION:


Make sure that the mating faces are clean and free of foreign material.

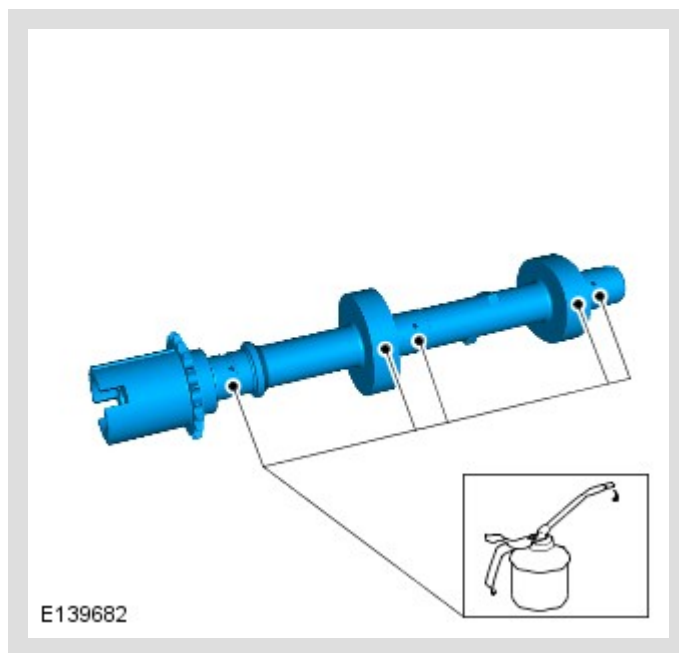

2.


⚠ CAUTION:

Take extra care not to damage the mating faces.

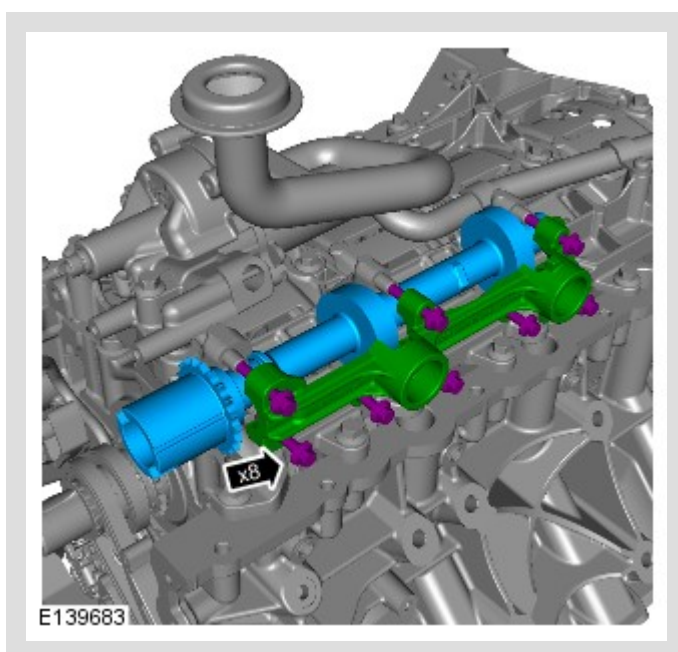


Torque: 12 Nm

3.

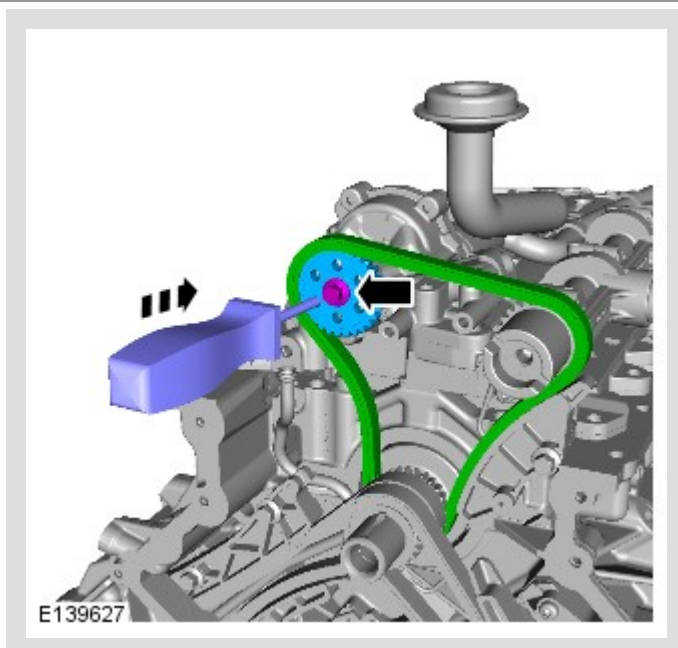


Torque: 21 Nm

4.

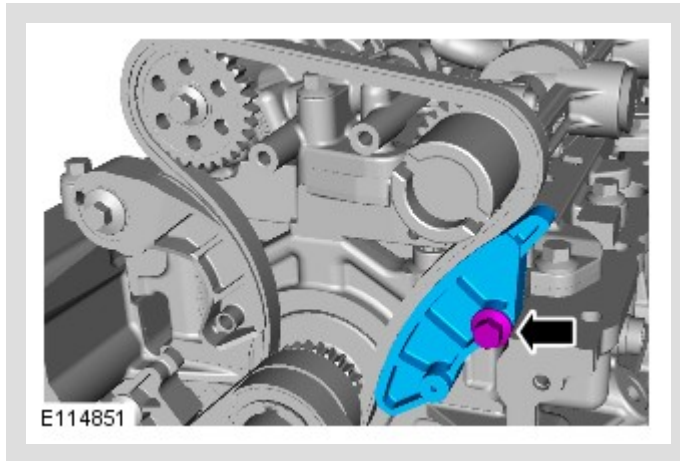

Torque: 12 Nm

5.

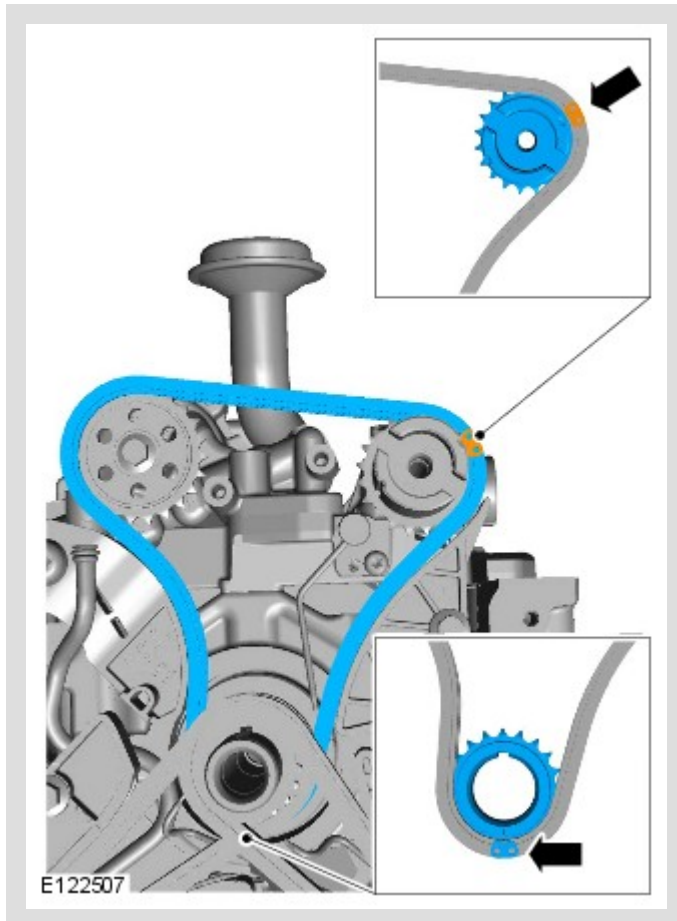


Install the lower timing chain making sure the coloured chain links align

correctly with the fuel rail high-pressure fuel pumps camshaft and crankshaft sprocket markings.

6.

⚠ CAUTION:

Make sure that the tensioner spring is correctly located.

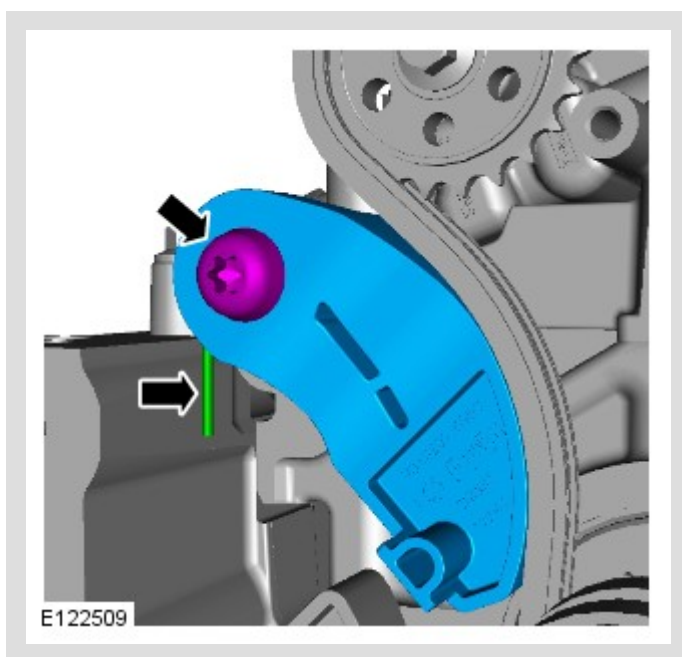

Torque: 21 Nm

7.

Refer to: Oil Pan Extension (303-01 Engine - V8 S/C 5.0L Petrol, Removal and Installation).

8.

Connect the battery ground cable.

Refer to: Specifications (414-00 Battery and Charging System - General Information, Specifications).

