

PUBLISHED: 10-SEP-2012
2014.0 RANGE ROVER (LG), 303-01

ENGINE - V8 S/C 5.0L PETROL

OIL COOLER (G1509351)

REMOVAL AND INSTALLATION

12.60.68

COOLER -
OIL -
RENEW

5000 CC, AJ
V8,
SUPERCHARGED

5.1

USED
WITHINS

REMOVAL

NOTES:

- Removal steps in this procedure may contain installation details.
- Some variation in the illustrations may occur, but the essential information is always correct.

1. Disconnect the battery ground cable.

Refer to: Specifications (414-00 Battery and Charging System - General Information, Specifications).

2.



WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


3.

Refer to: Engine Oil Draining and Filling (303-01 Engine - V8 S/C 5.0L Petrol, General Procedures).


4.

Refer to: Supercharger (303-12 Intake Air Distribution and Filtering - V8 S/C 5.0L Petrol, Removal and Installation).

5.

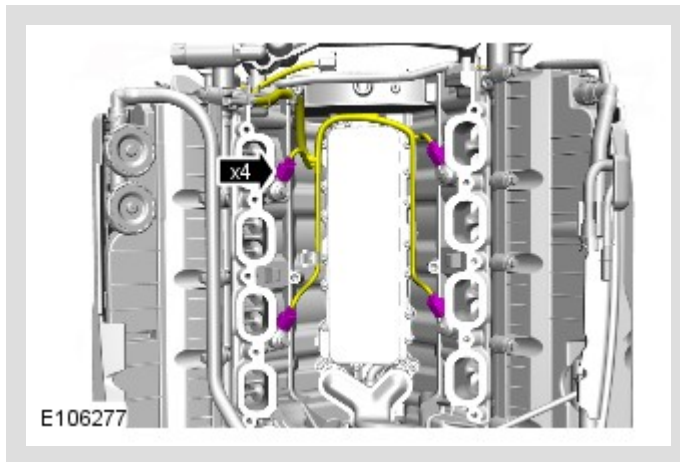

6.

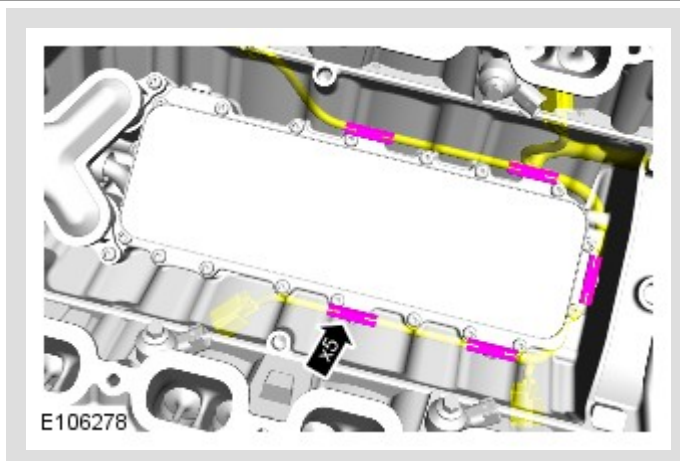


7.



CAUTIONS:

- Be prepared to collect escaping oil.
- Be prepared to collect escaping coolant.

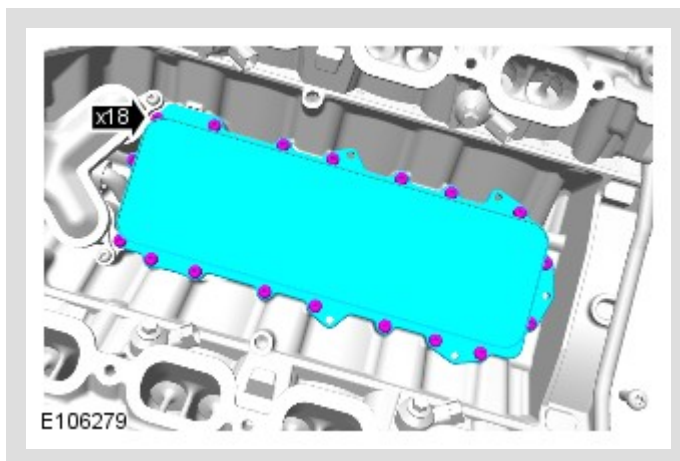

Torque: 13 Nm



8.

⚠ CAUTION:

Make sure that these components are installed to the noted removal position.

⚠ NOTE:

Install a new gasket.

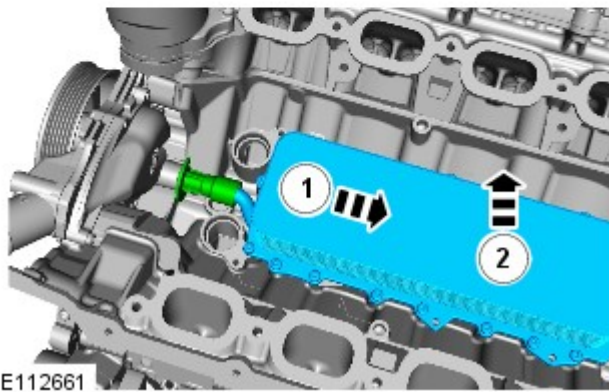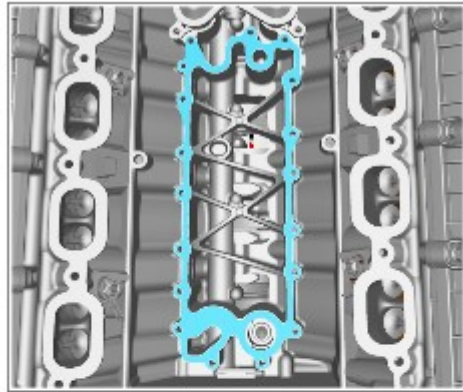


9.



CAUTIONS:

- Make sure that these components are installed to the noted removal position.
- Install new o-ring seals

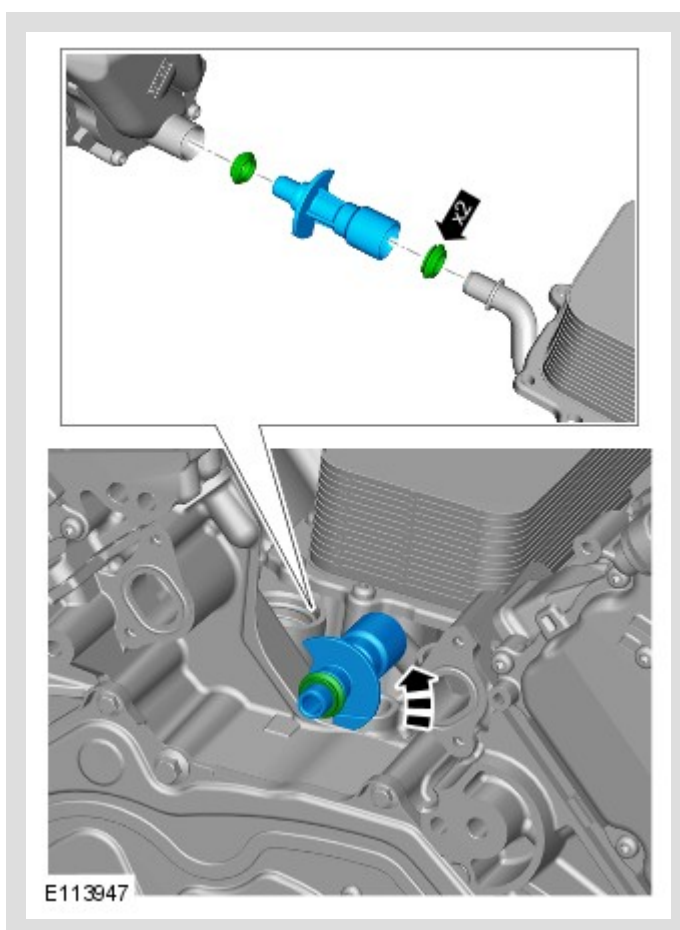

INSTALLATION

1.




CAUTIONS:

- Install all the bolts finger tight before final tightening.
- Make sure that the area around the component is clean and free of foreign material.
- Install the new seals.

 NOTE:

Tighten the bolts in the indicated sequence.

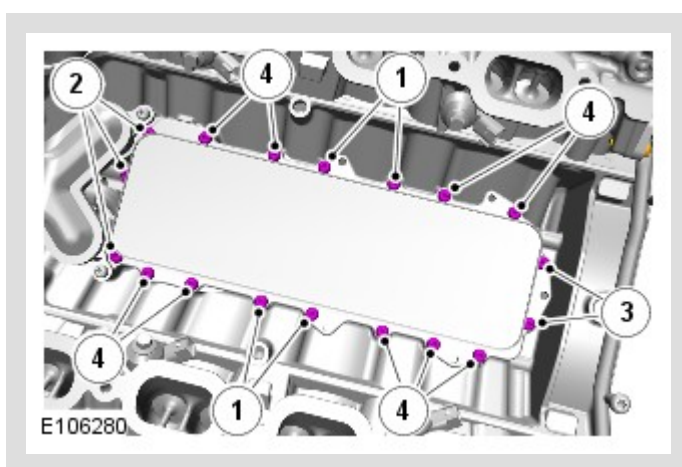

To install, reverse the removal procedure.