

PUBLISHED: 07-JUL-2014  
2014.0 RANGE ROVER (LG), 303-03

ENGINE COOLING - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

# COOLING FAN SHROUD (G1551343)

## REMOVAL AND INSTALLATION

|          |                            |                                    |     |                 |  |
|----------|----------------------------|------------------------------------|-----|-----------------|--|
| 26.25.11 | SHROUD<br>- FAN -<br>RENEW | 5000 CC, AJ<br>V8,<br>SUPERCHARGED | 0.8 | USED<br>WITHINS |  |
|----------|----------------------------|------------------------------------|-----|-----------------|--|

## REMOVAL

### NOTES:


- Removal steps in this procedure may contain installation details.
- Some variation in the illustrations may occur, but the essential information is always correct.
- Components shown removed for clarity.

1. Refer to: Cooling Fan (303-03 Engine Cooling - V8 5.0L Petrol/V8 S/C 5.0L Petrol, Removal and Installation).

2.

### NOTE:


Be prepared to collect escaping coolant.

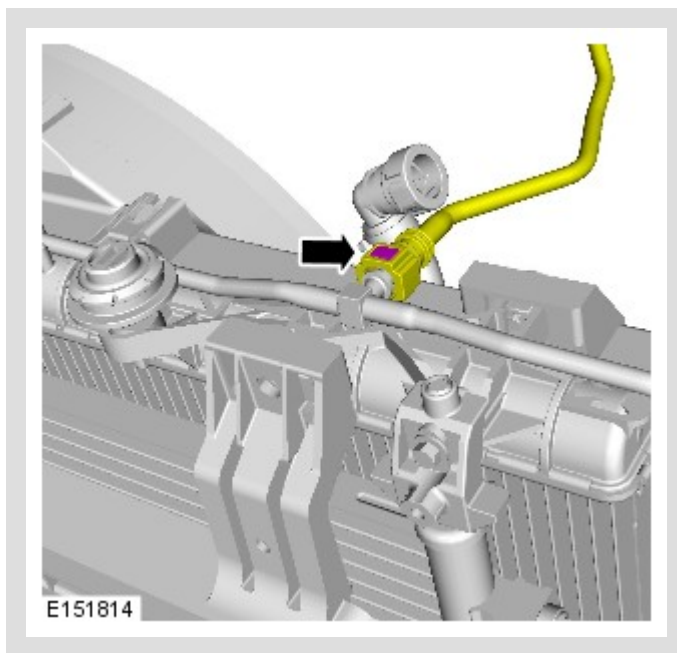


3.

 **NOTE:**

Be prepared to collect escaping coolant.

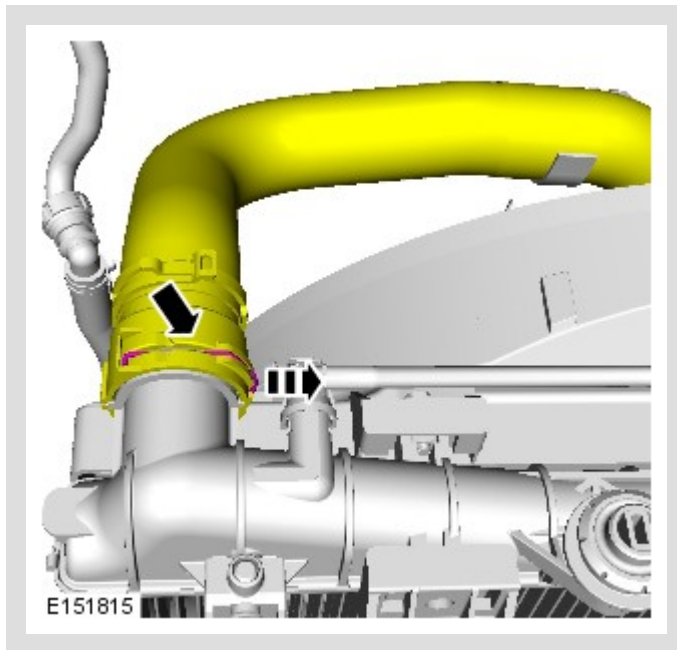

4.

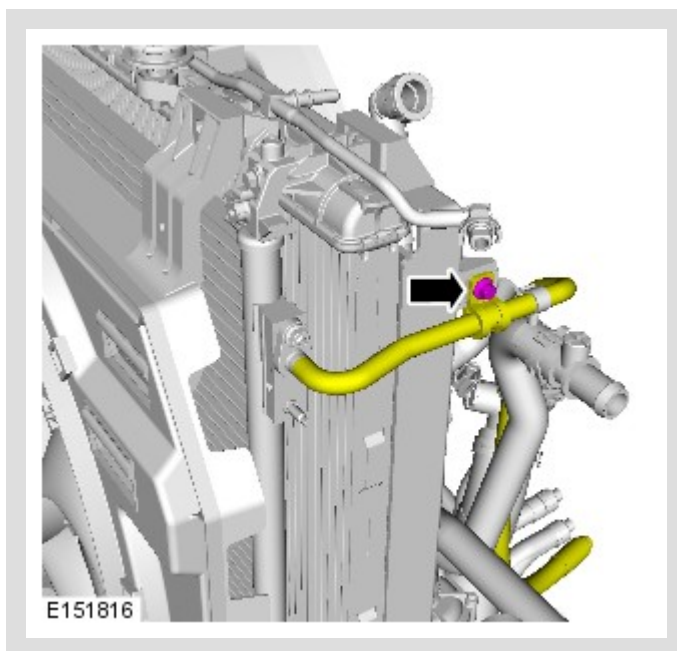


*Torque: 7 Nm*

5.

 **NOTE:**


Supercharged only

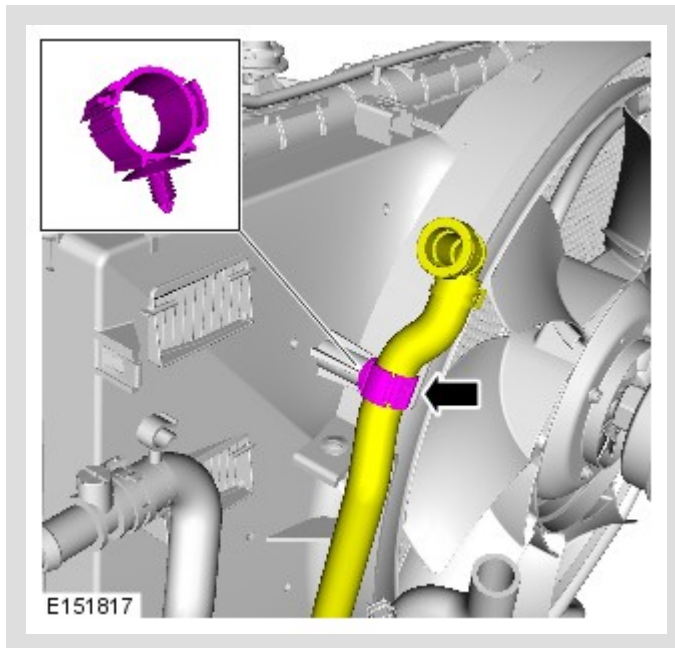

6.


△ NOTE:

Supercharged only

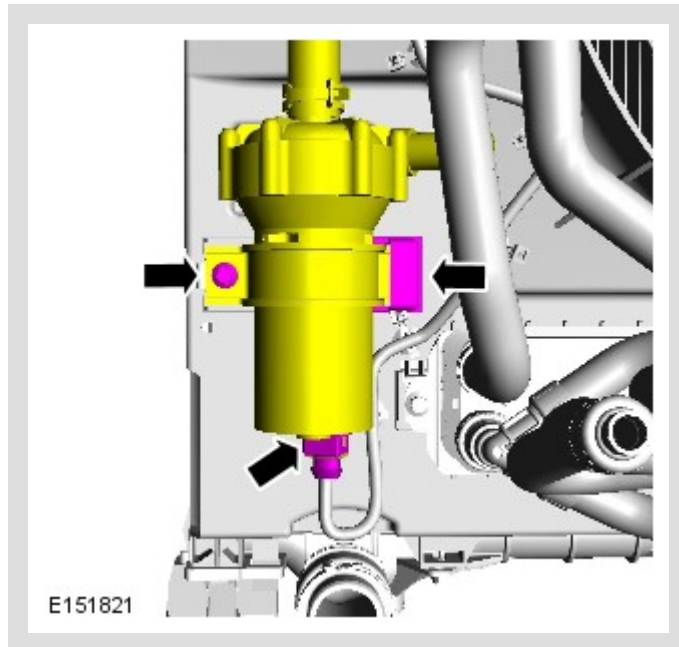


*Torque: 5 Nm*

7.

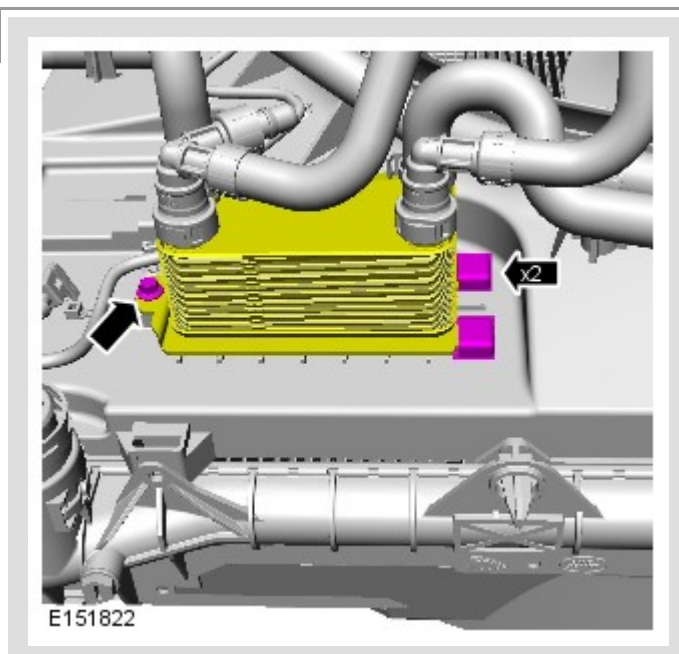


*Torque: 7 Nm*


8.

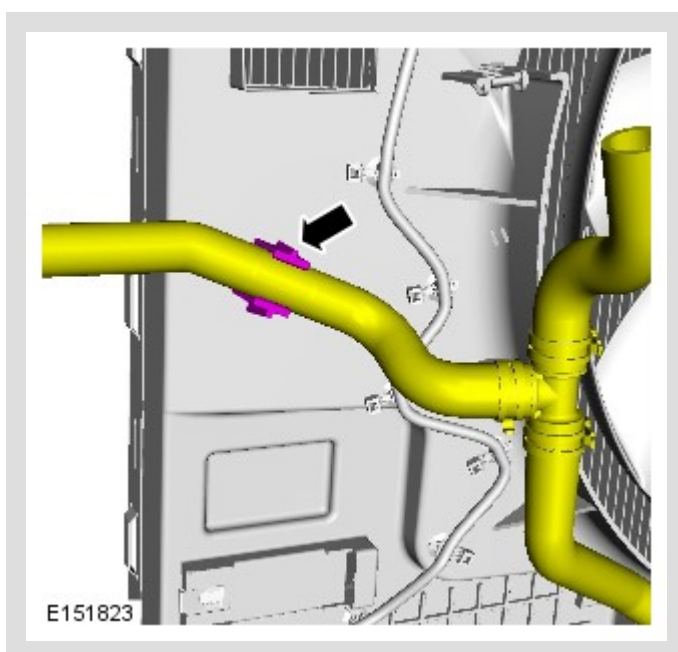

9.

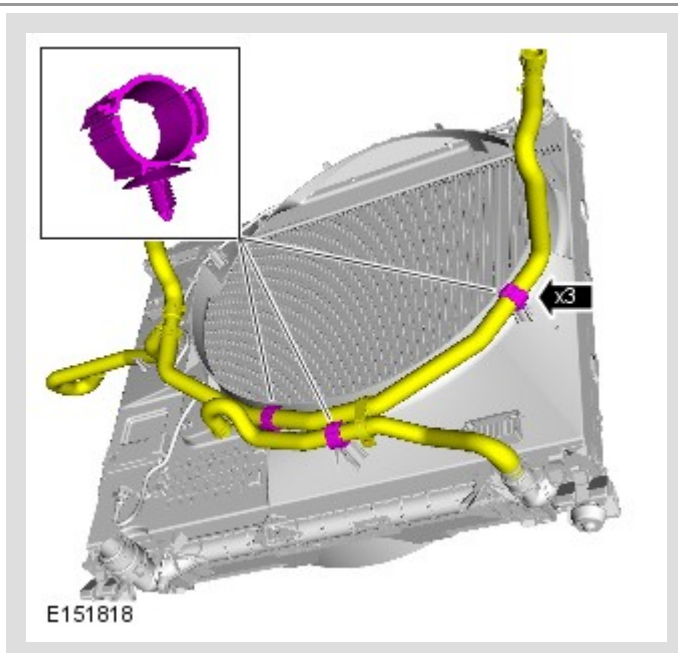


10.

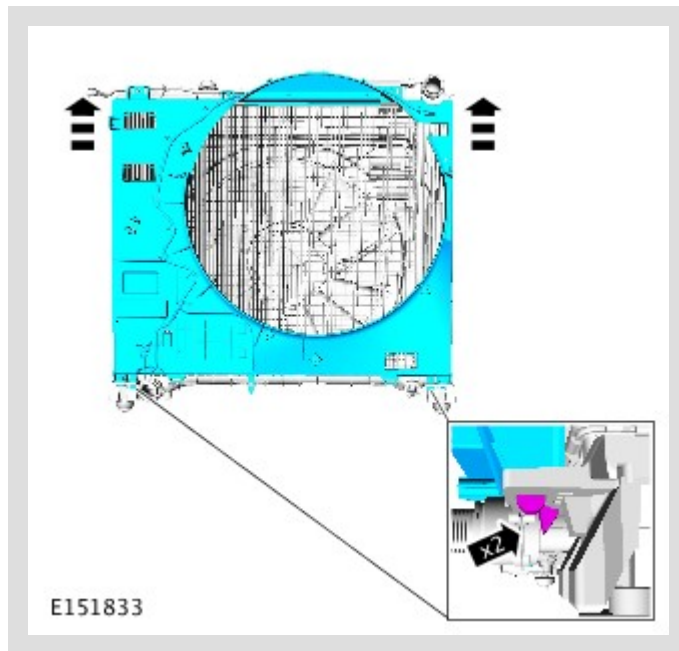

 NOTE:

Do not disassemble further if component is removed for access only.



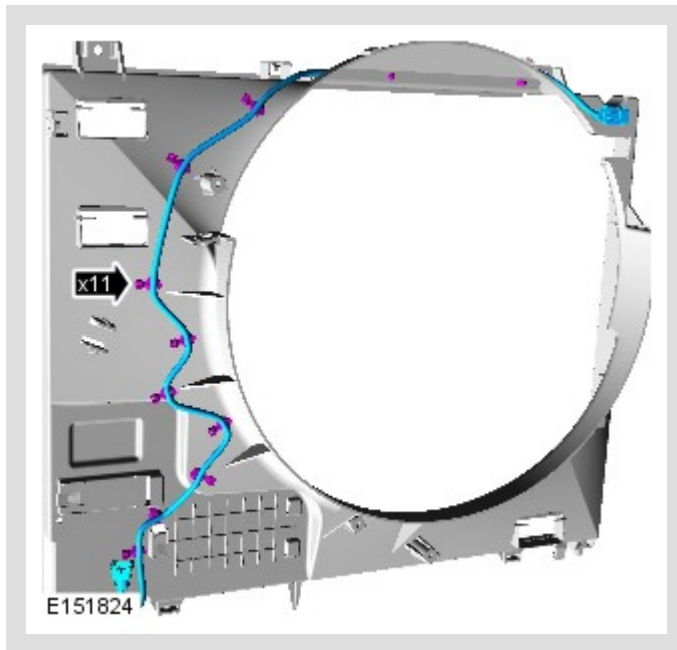

## INSTALLATION

1. To install, reverse the removal procedure.
2. Check and top up coolant level.