

PUBLISHED: 08-AUG-2012  
2014.0 RANGE ROVER (LG), 303-03

ENGINE COOLING - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

# COOLANT EXPANSION TANK (G1509367)

## REMOVAL AND INSTALLATION

26.15.01

TANK -  
RENEW

ALL  
DERIVATIVES

0.3

USED  
WITHINS


### REMOVAL



#### WARNING:

Since injury such as scalding could be caused by escaping steam or coolant, make sure the vehicle cooling system is cool prior to carrying out this procedure.

1.

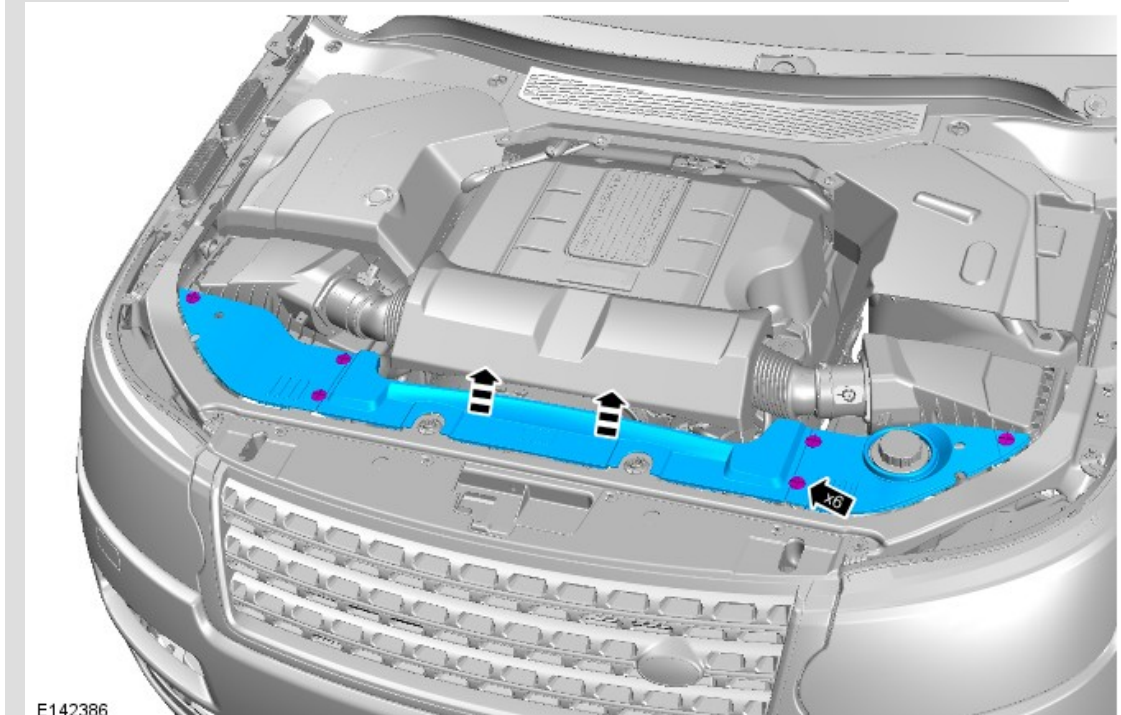


2.



#### WARNING:

When releasing the cooling system pressure, cover the coolant expansion tank cap with a thick cloth.

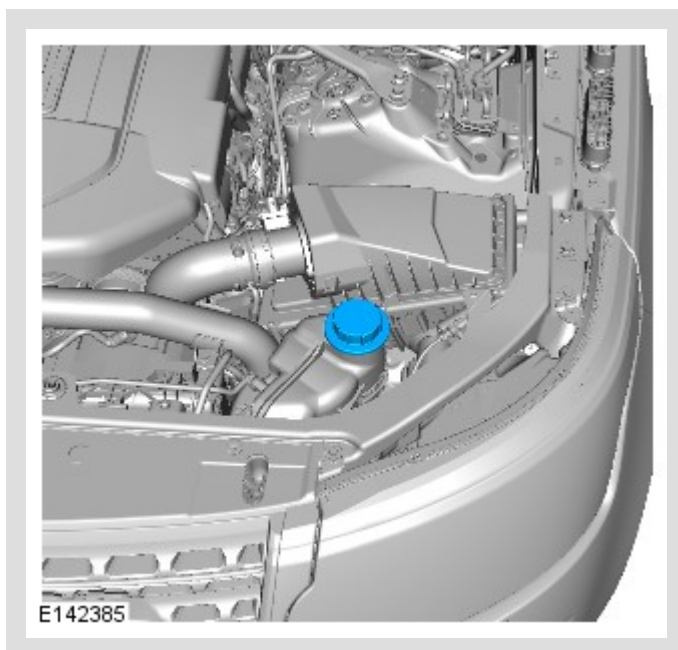

- 
3. Using a syringe, remove the cooling fluid from the expansion tank.


---

4.



**CAUTION:**

Clamp the hoses to minimize coolant loss.

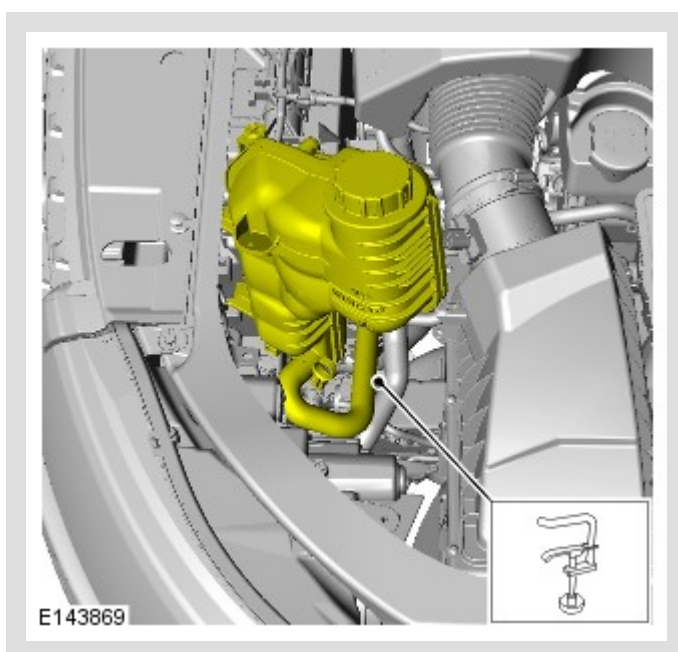


5.




**CAUTION:**

Be prepared to collect escaping coolant.

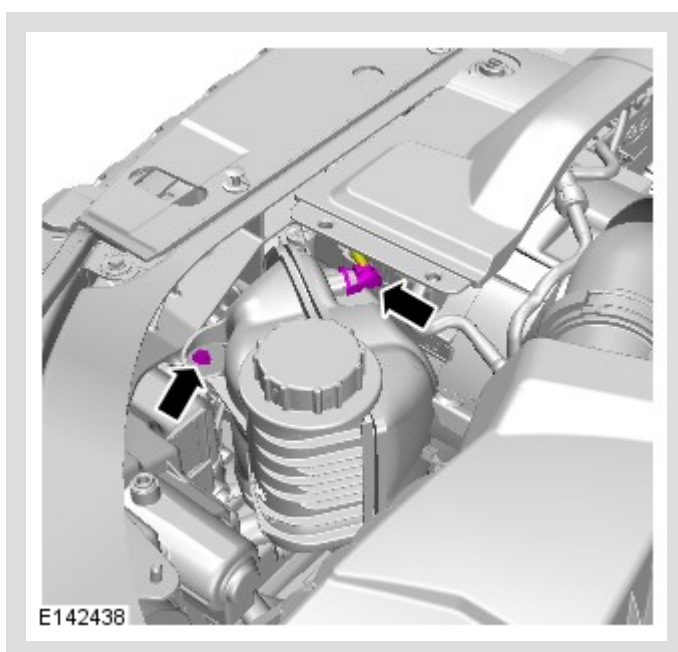

6.

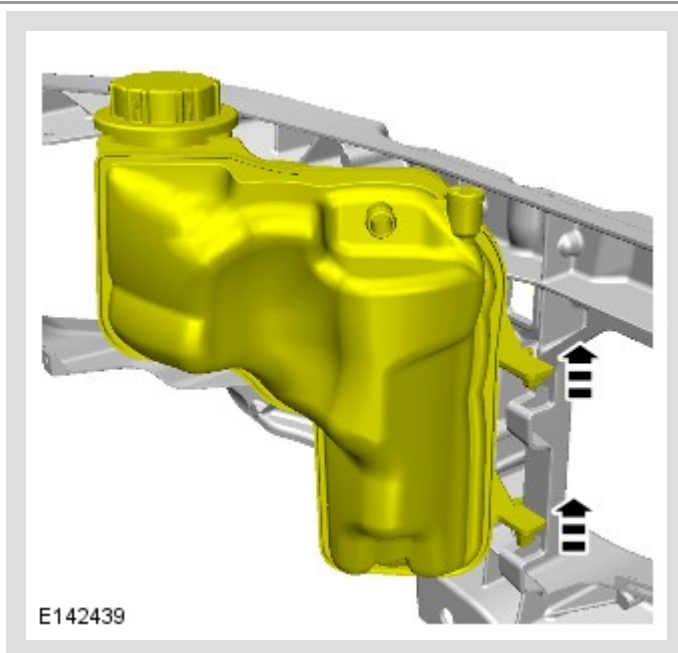


7.




**CAUTION:**

Be prepared to collect escaping coolant.

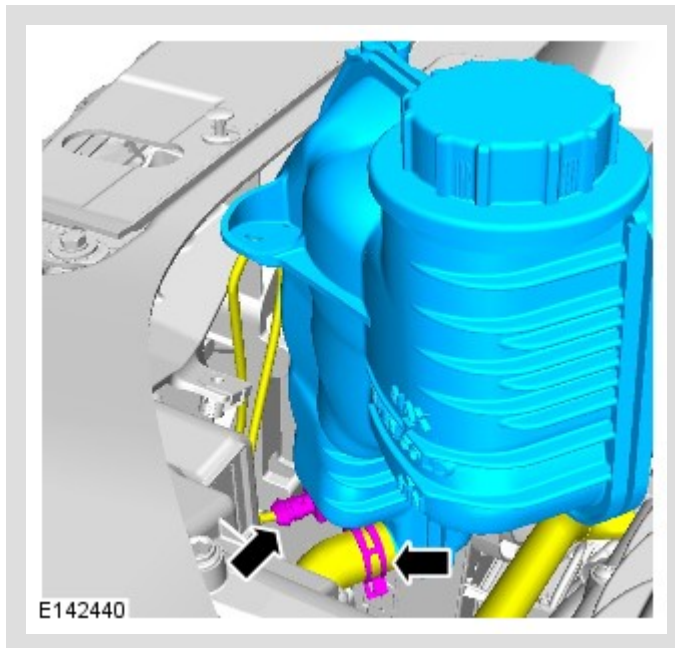


## INSTALLATION

1.

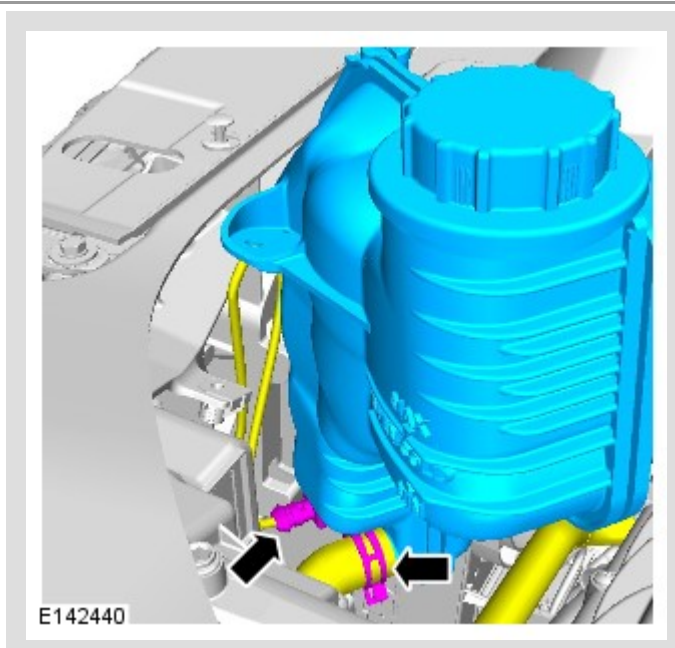


2.

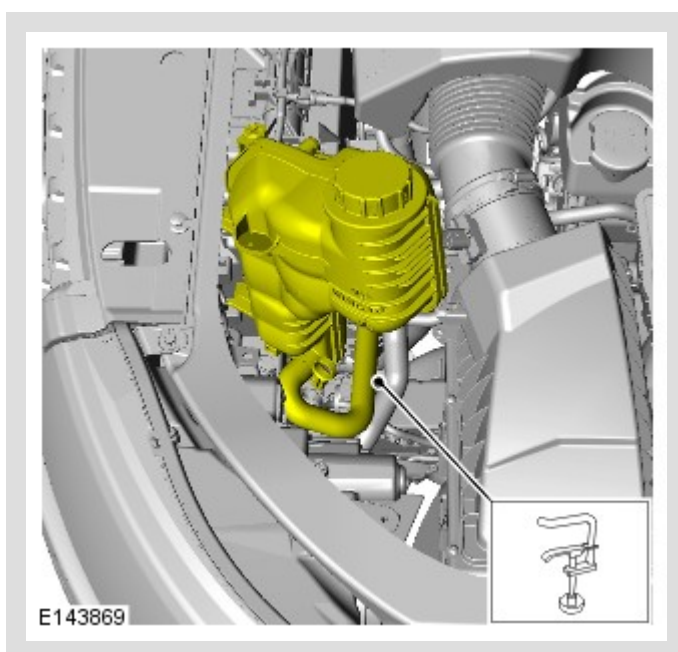

3.

 **NOTE:**


Keep the coolant expansion tank vertically.

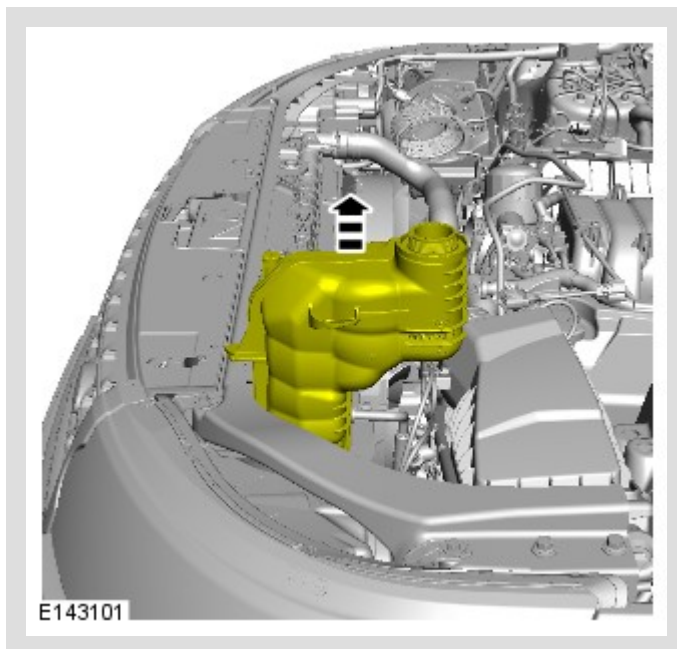

Raise the coolant expansion tank minimum 110mm from its original position.

- 
4. Fill the cooling system, keeping coolant to the upper level mark of the expansion tank, until a steady stream of coolant is seen returning to the tank.
- 


5.

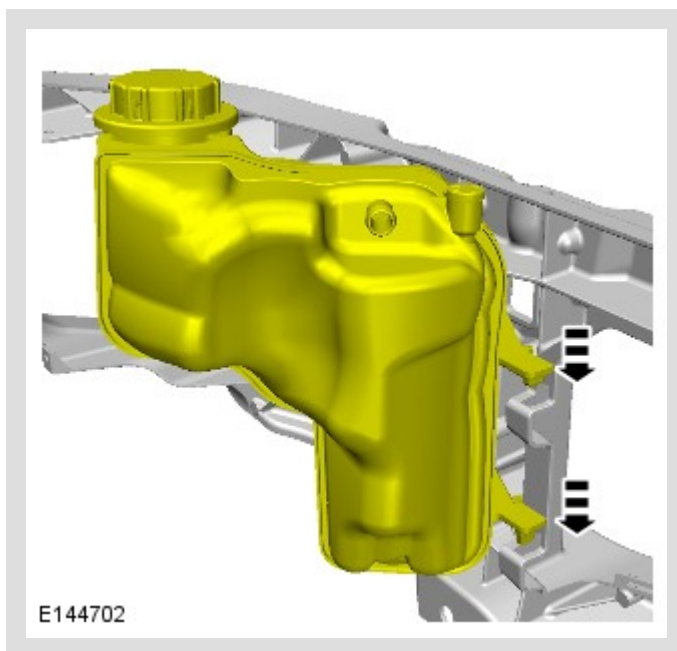

---

6.



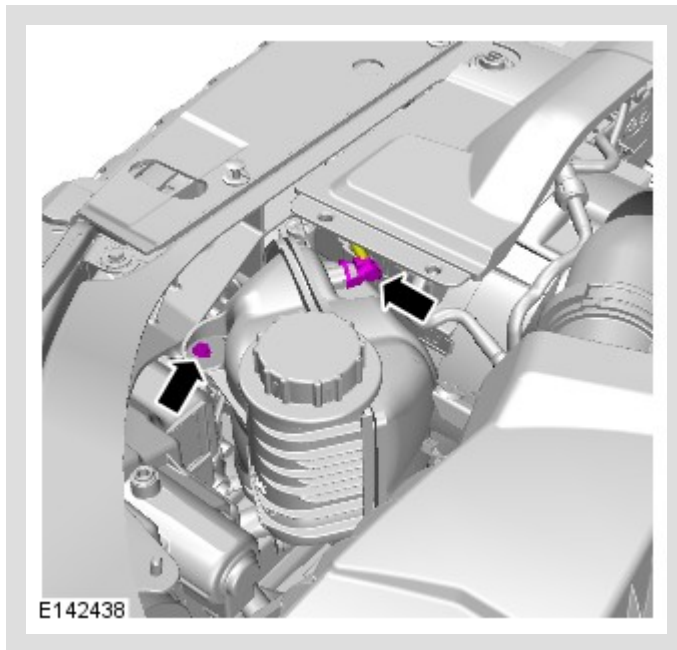

*Torque: 2.8 Nm*

7.



**CAUTION:**

Make sure the coolant level remains above the "COLD FILL RANGE" lower level mark.

Check and top up the cooling system as required.

8.

