

PUBLISHED: 08-DEC-2014
2014.0 RANGE ROVER (LG), 303-03

SUPERCHARGER COOLING - V8 S/C 5.0L PETROL

COOLANT PUMP (G1509405)

REMOVAL AND INSTALLATION

26.50.01	PUMP - WATER - RENEW	5000 CC, AJ V8, SUPERCHARGED	1.6	USED WITHINS	
26.50.26	AUXILIARY COOLANT PUMP - RENEW	5000 CC, AJ V8, SUPERCHARGED	0.9	USED WITHINS	

REMOVAL

NOTE:

Removal steps in this procedure may contain installation details.

1.



WARNING:


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.


2.

Refer to: Cooling System Partial Draining and Vacuum Filling (303-03B, General Procedures).

3.

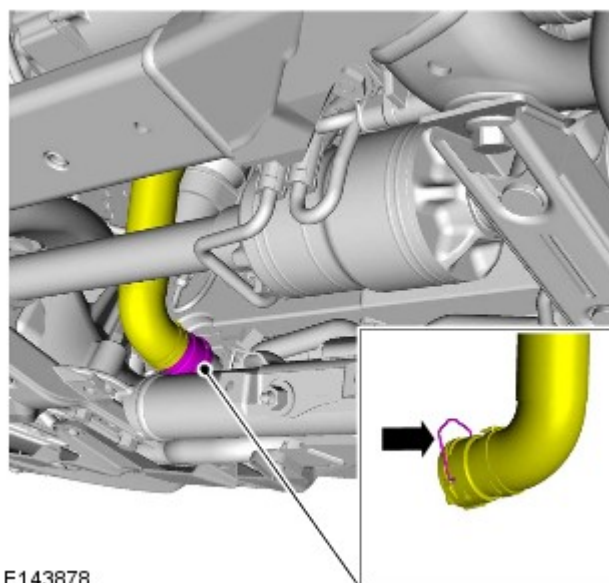


4.

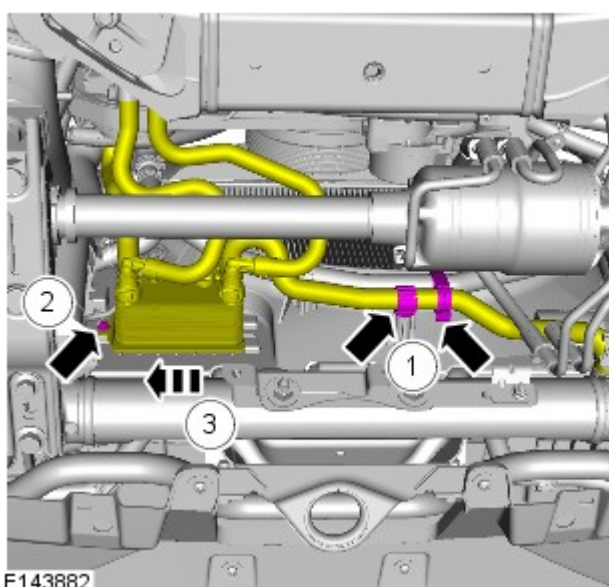

Tie aside.


Torque: 7 Nm

5.

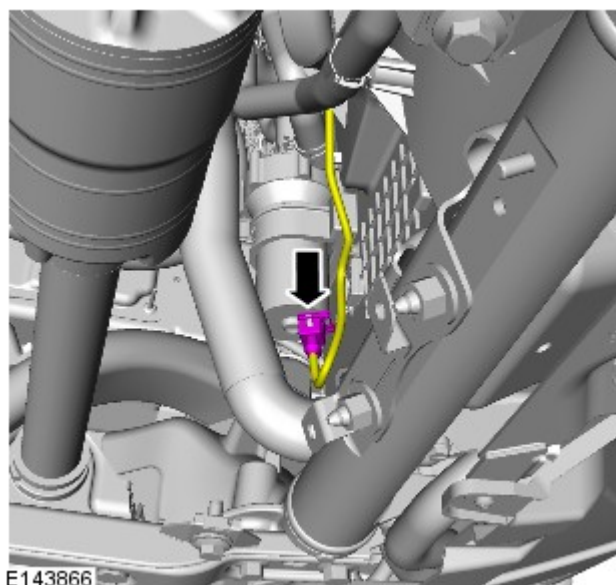

E143866

6.

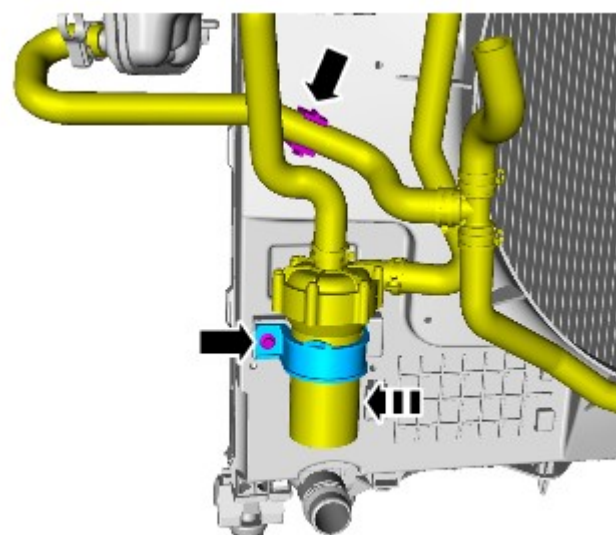

E143865


Torque: 7 Nm

7.



CAUTION:

Be prepared to collect escaping coolant.

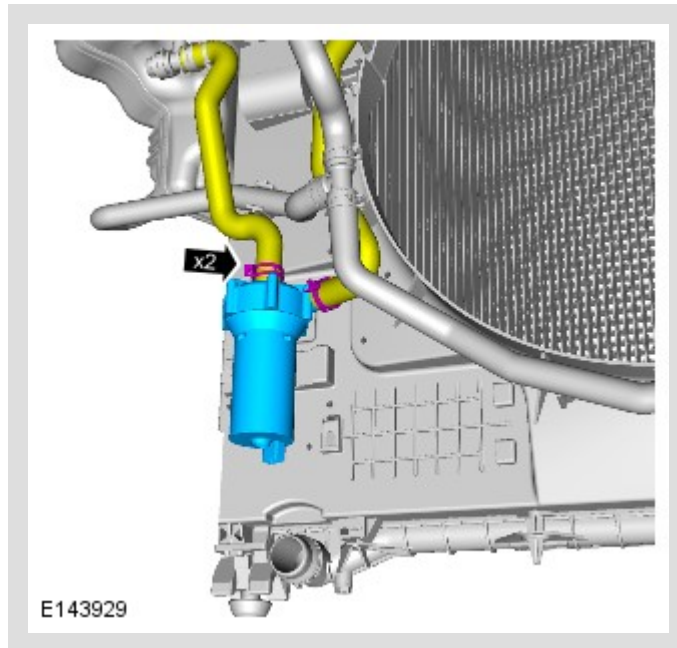

INSTALLATION

1.



CAUTIONS:

- Damage to the charge air coolant pump will occur if the pump is allowed to cavitate.
- Make sure the charge air coolant pump is primed prior to running the pump.
- If accidentally dropped install a new charge air coolant pump.

To install, reverse the removal procedure.

