

2016.0 RANGE ROVER (LG), 309-00

EXHAUST SYSTEM - TDV6 3.0L DIESEL

DIESEL PARTICULATE FILTER - VEHICLES WITH: DIESEL EXHAUST FLUID

[G1875942]

REMOVAL AND INSTALLATION

SPECIAL TOOL(S)



310-121

Wrench, H02S

GENERAL EQUIPMENT

EQUIPMENT NAME

Land Rover diagnostic equipment

REMOVAL

WARNING:

Observe due care when working near a hot exhaust system.

CAUTION:

Removal steps in this procedure contains installation details.



All vehicles

1.


WARNING:

Make sure to support the vehicle with axle stands.


Raise and support the vehicle.

2. Refer to: [Front Driveshaft - TDV6 3.0L Diesel](#) (205-01 Driveshaft, Removal and Installation).


3.

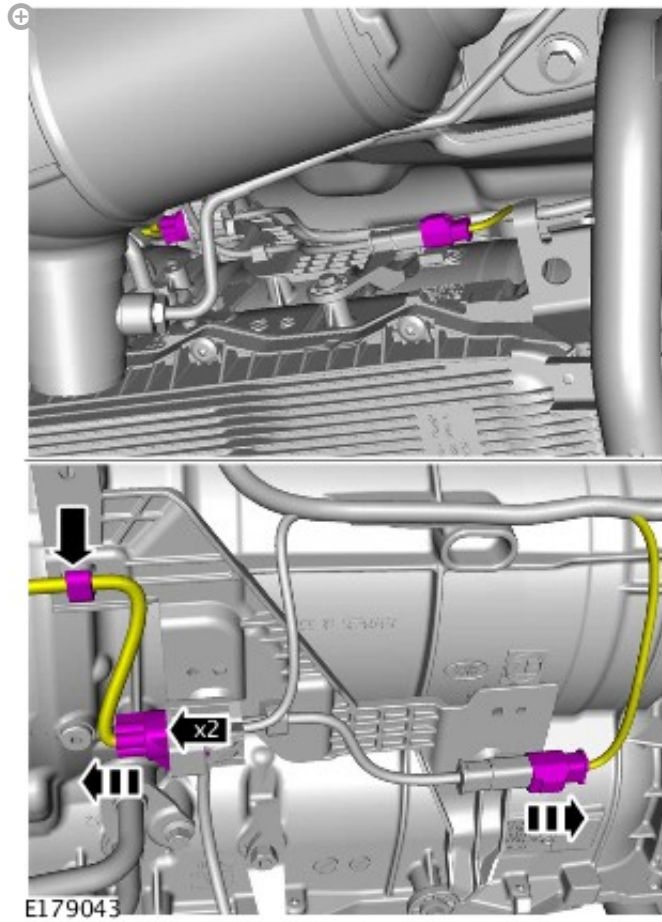


4.

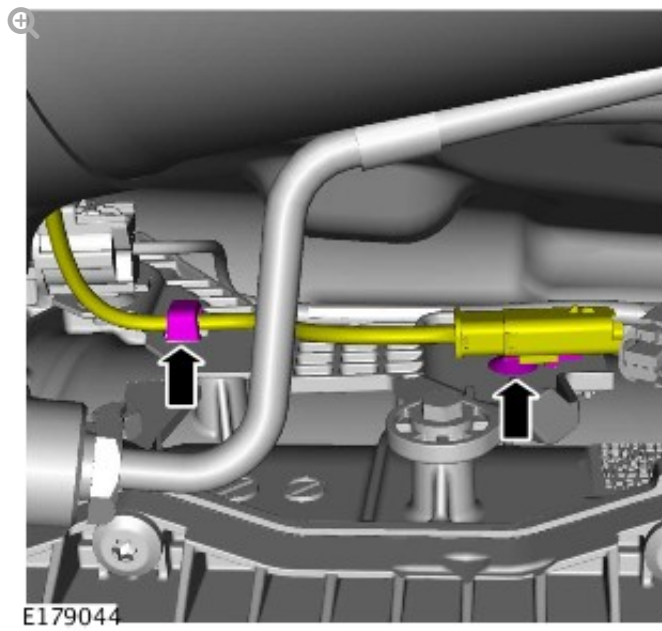


5.

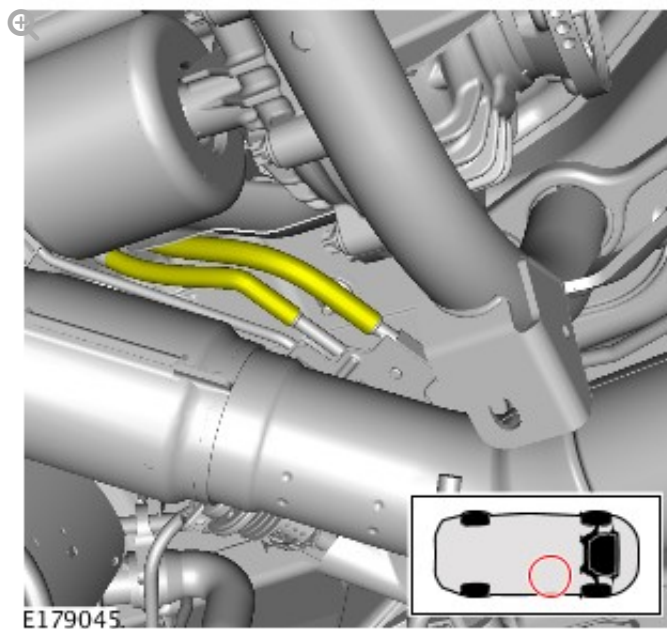

6.

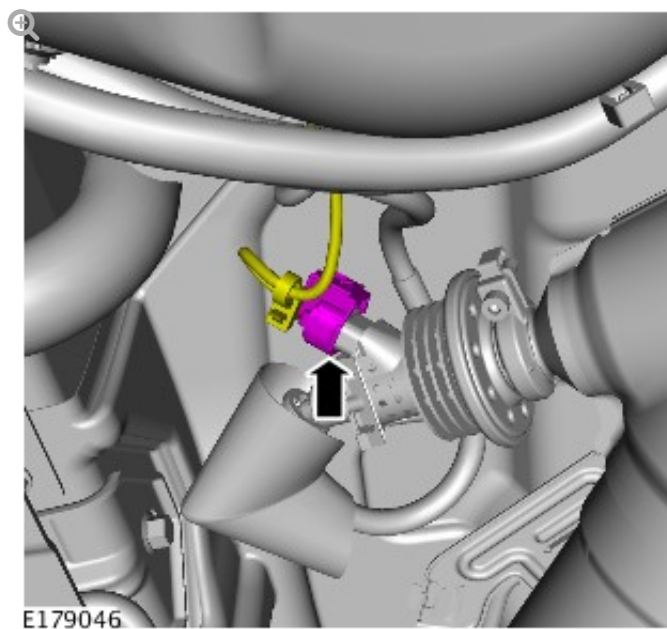

7.

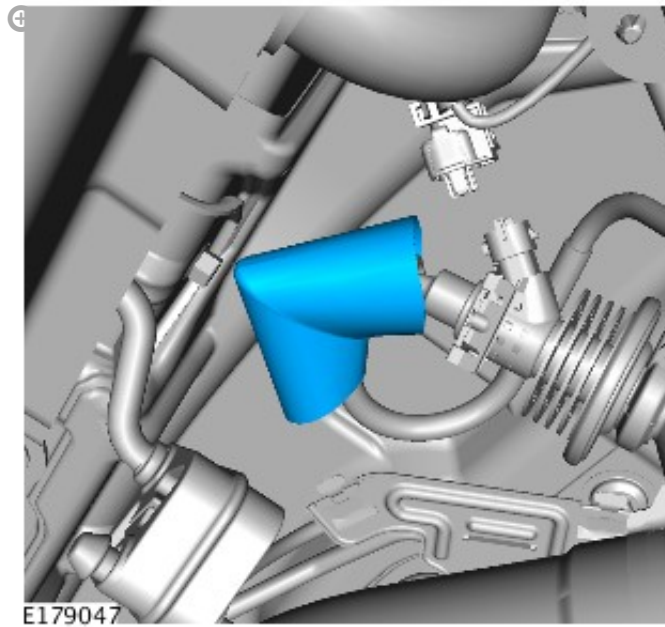


8.

CAUTIONS:


- Be prepared to collect escaping fluids.
- Make sure that the area around the component is clean and free of foreign material.

NOTE:


Make sure that all openings are sealed. Use new blanking caps.

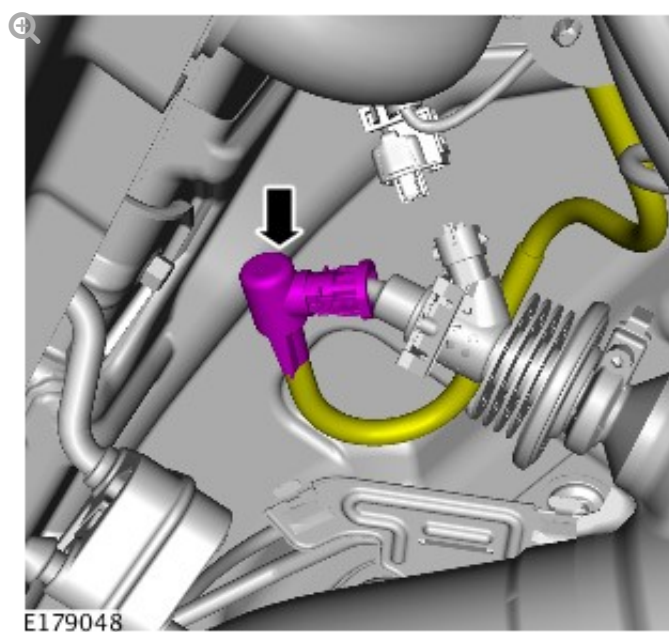


9.

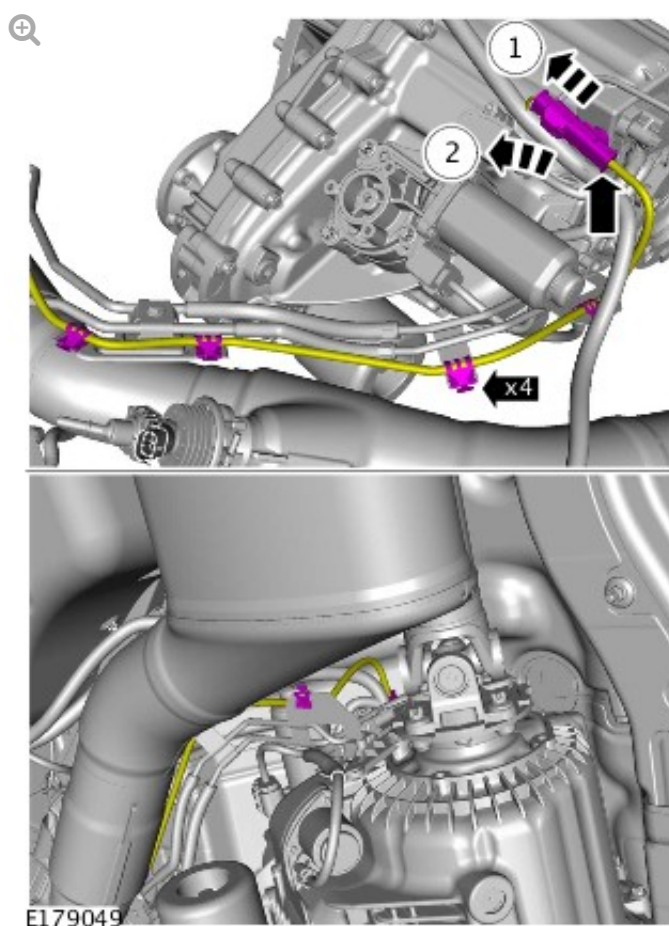

10.

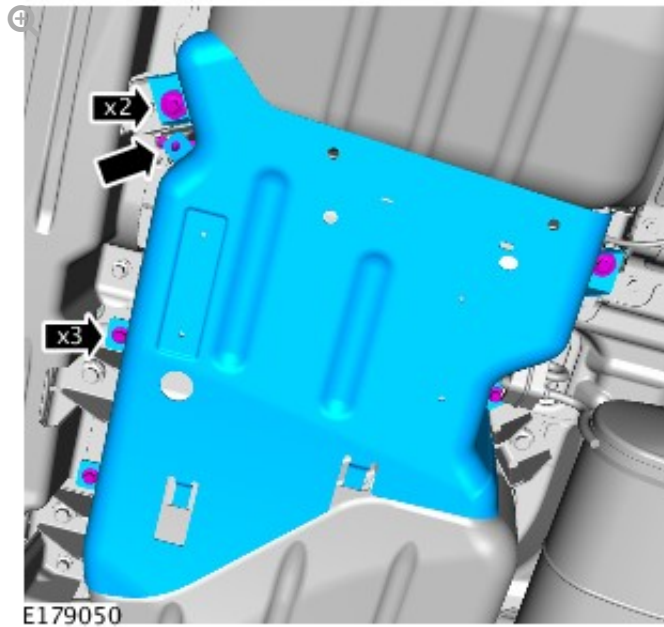

11.

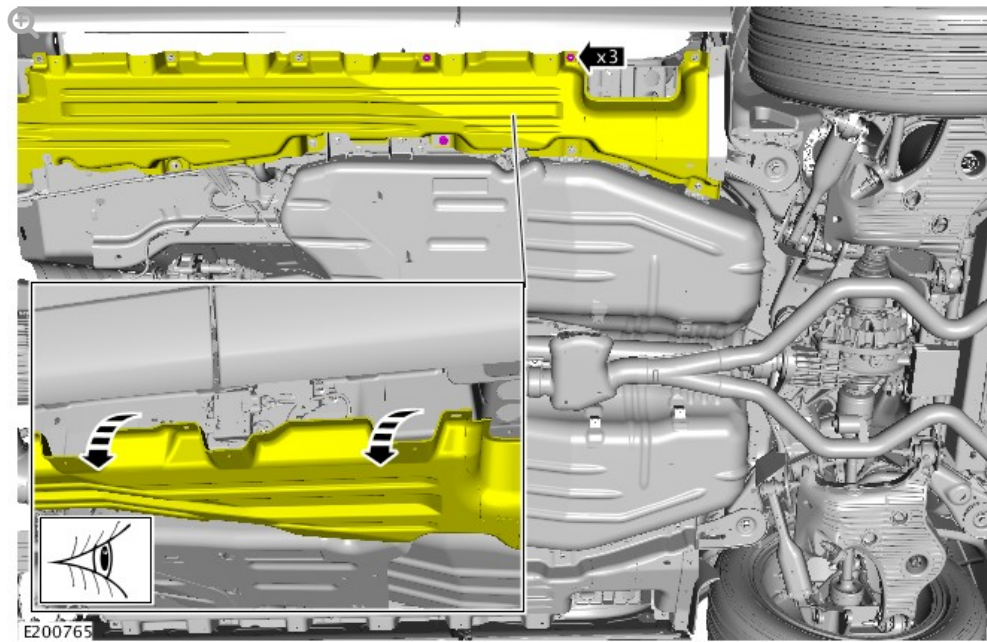


- Remove the nuts.
- Using a suitable tool move the aeroshield down to gain access to the Nitrogen Oxide (NOx) sensor control module.



All vehicles


12.

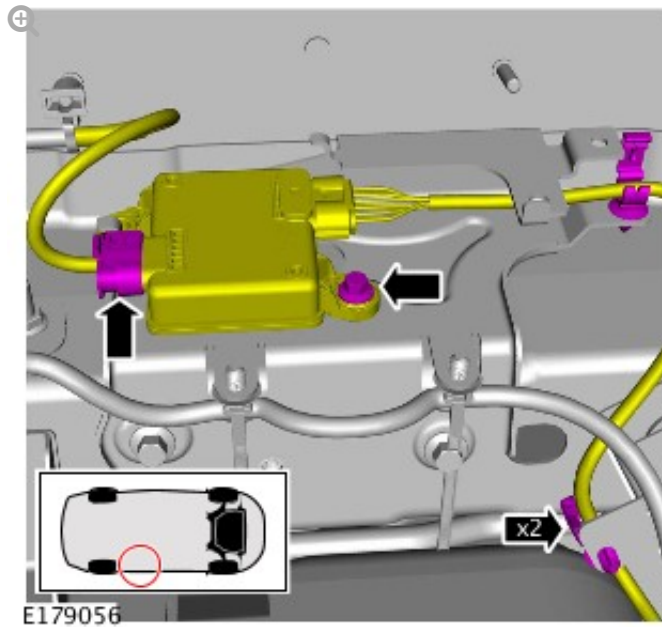

13.

CAUTION:


Take extra care not to damage the component.

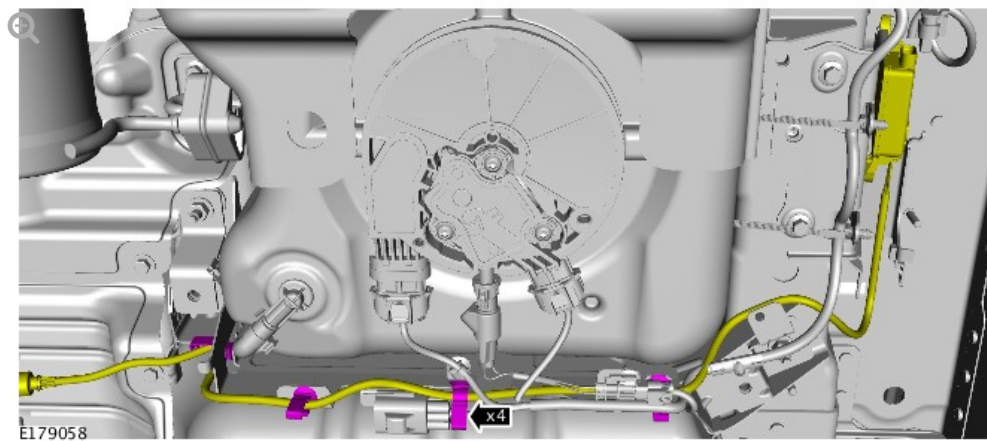

14.

CAUTION:


Take extra care not to damage the component.

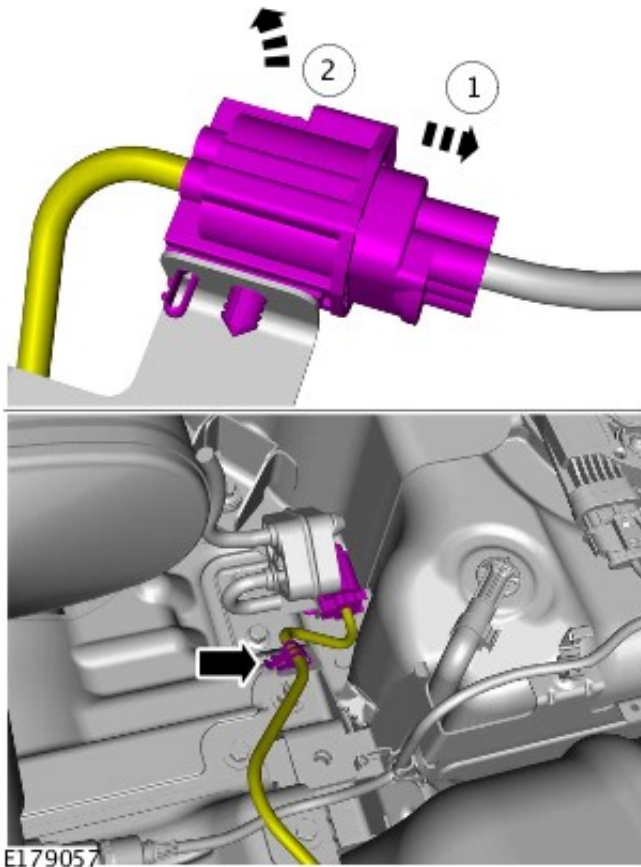

15.

CAUTION:


Make sure to support the rear muffler assembly with a suitable stand.

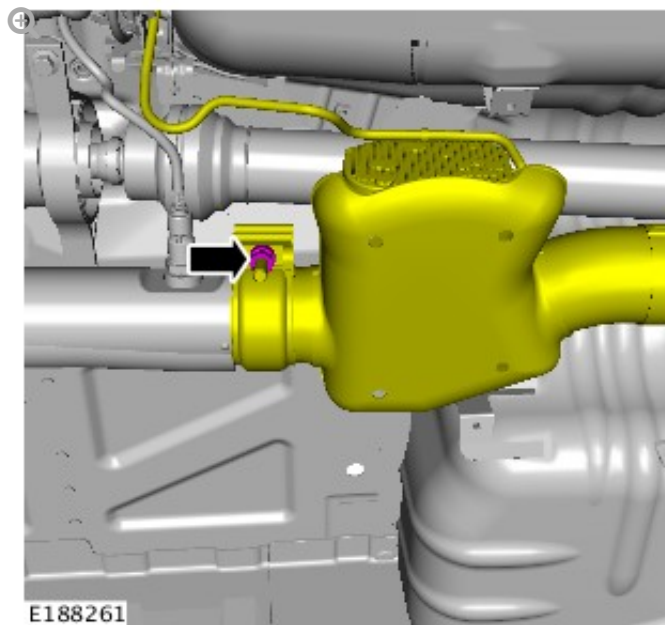

Remove the DPF from the rear muffler.


Torque: 55 Nm

16.

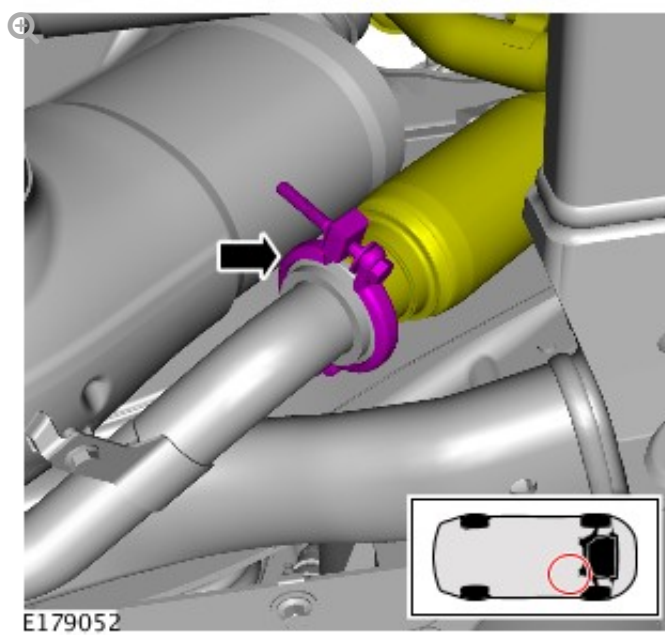


Torque: 9 Nm

17.

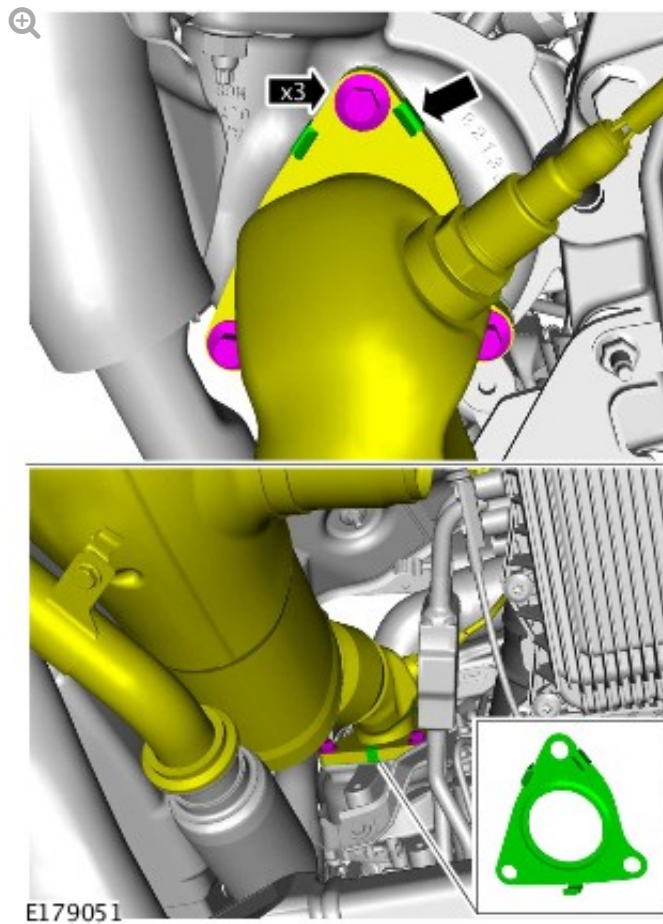

Torque: 28 Nm


18.

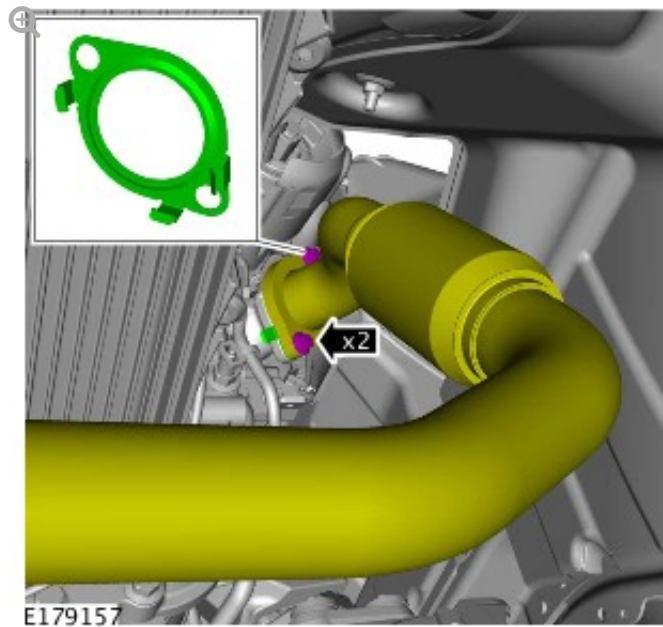

Vehicles with twin turbo system:


Torque: 28 Nm

19.

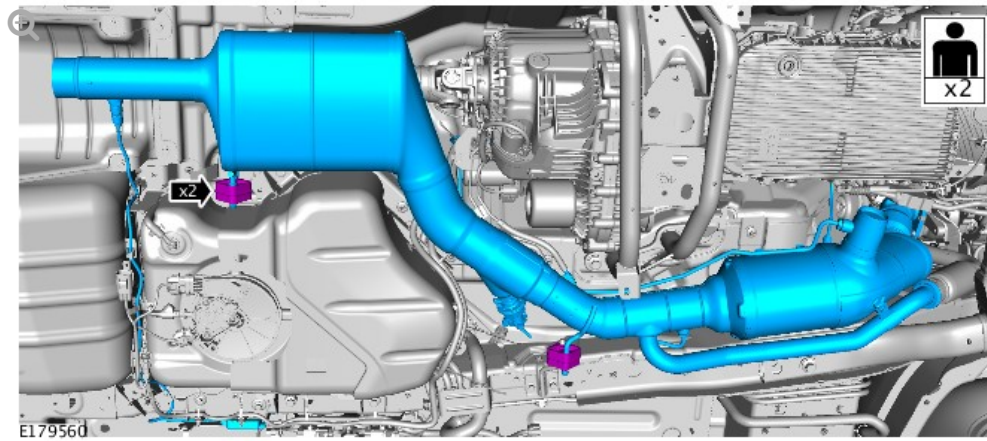

Vehicles with mono turbo system:

20.

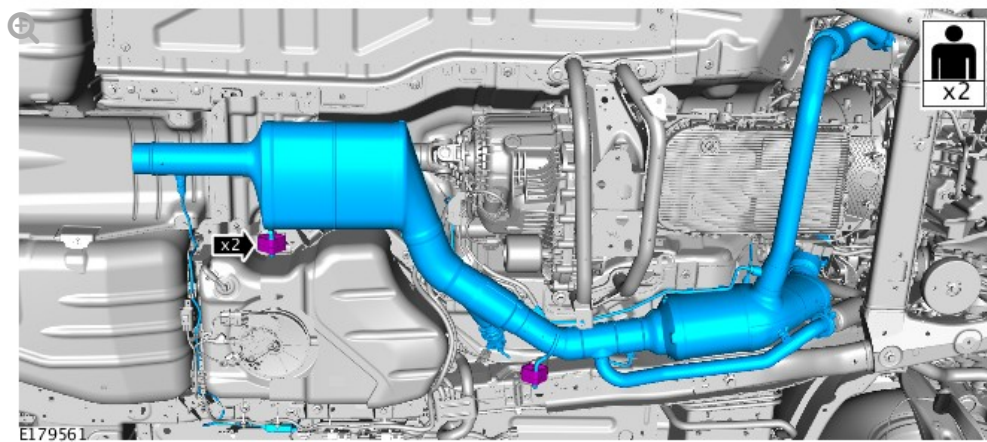

Vehicles with twin turbo system:


21.

CAUTION:

Discard the seal.

NOTES:


- Do not disassemble further if the component is removed for access only.
- Discard the bolt and clamp.

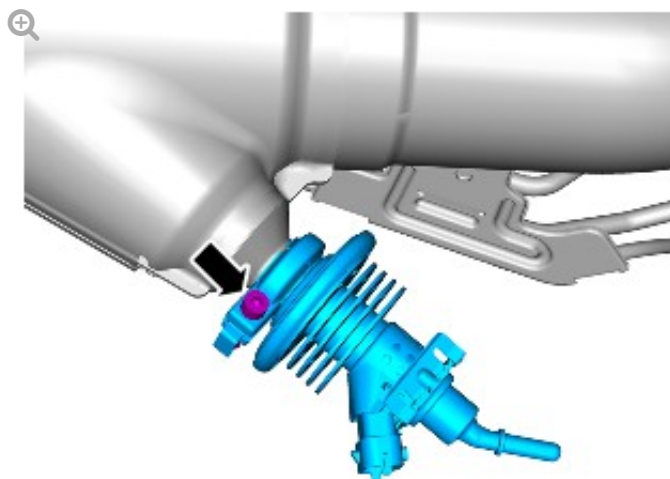

E179061

Torque: 4.7 Nm


22.

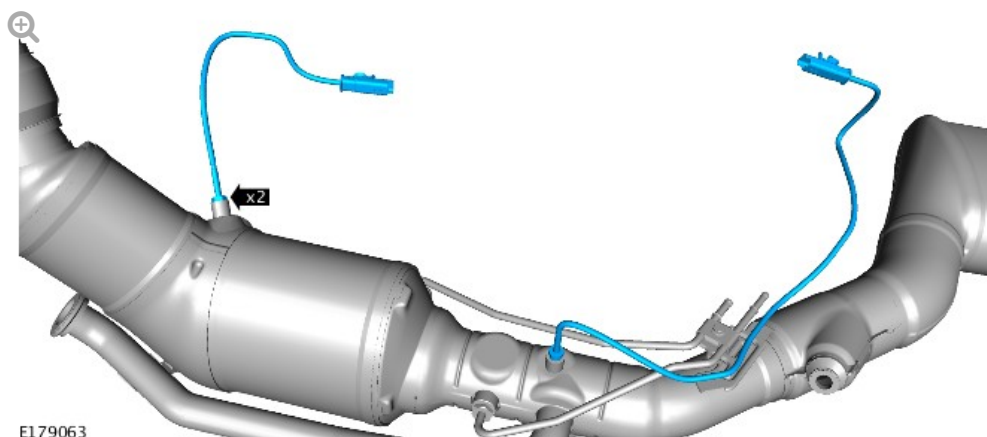

E179063

Torque: 35 Nm


23.

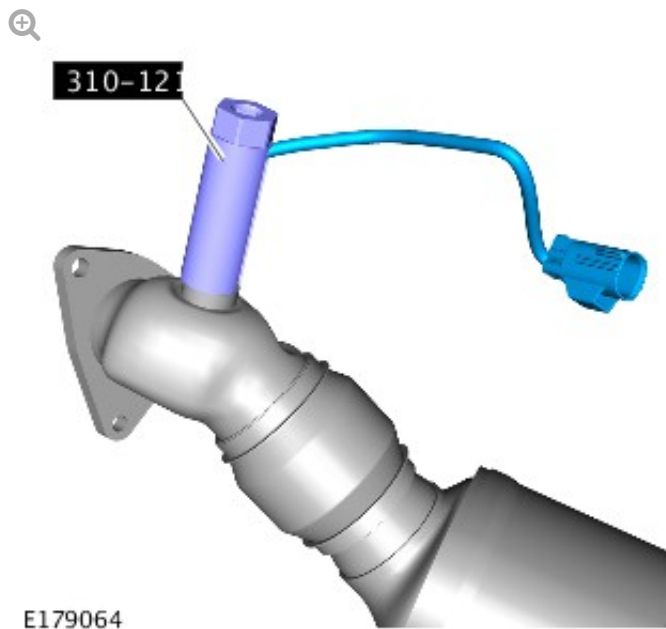

Special Tool(s): [310-121](#)

Torque: 48 Nm

24.

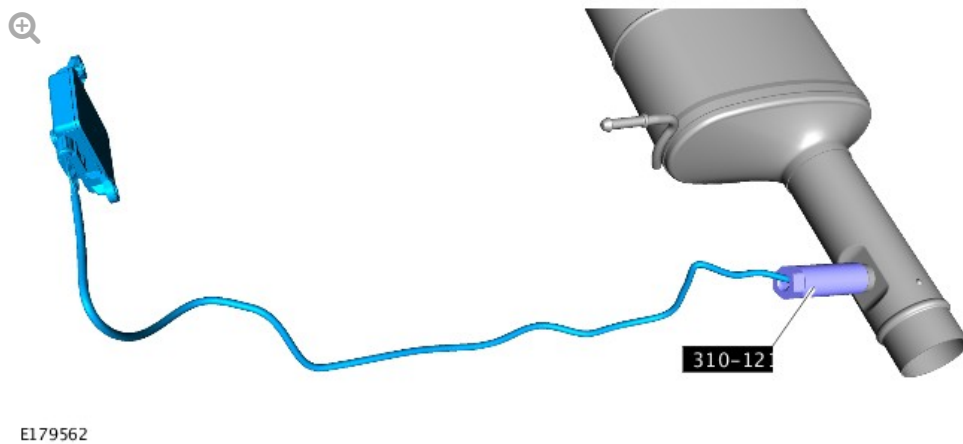

Special Tool(s): [310-121](#)

Torque: 48 Nm

INSTALLATION

1. To install, reverse the removal procedure.
2. Using Land Rover approved diagnostic equipment, prime the diesel exhaust fluid system.

General Equipment: [Land Rover diagnostic equipment](#)

