

PUBLISHED: 28-NOV-2016
2014.0 RANGE ROVER (LG), 309-00

EXHAUST SYSTEM - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

EXHAUST SYSTEM (G1700191)

REMOVAL AND INSTALLATION

SPECIAL TOOL(S)



REMOVAL



WARNING:

Observe due care when working near a hot exhaust system.



NOTE:

Removal steps in this procedure may contain installation details.

All vehicles

1.




WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2. Refer to: Engine Undershield (501-02 Front End Body Panels, Removal and Installation).

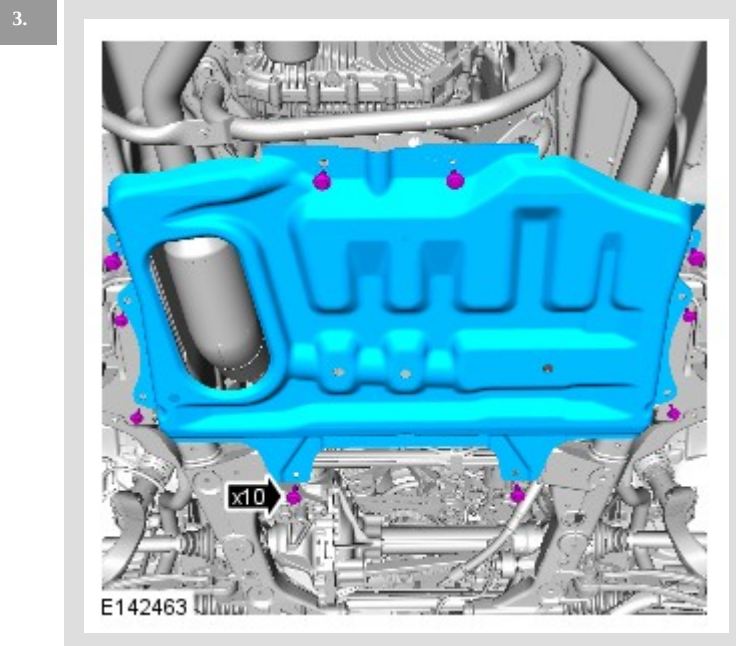


Torque:

M10 60 Nm


M6 10 Nm

- 4.

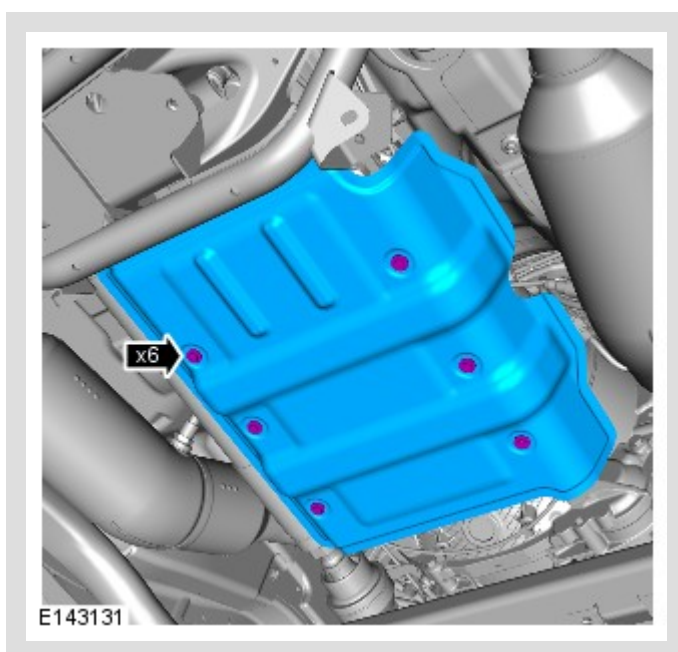


Torque: 10 Nm


5.

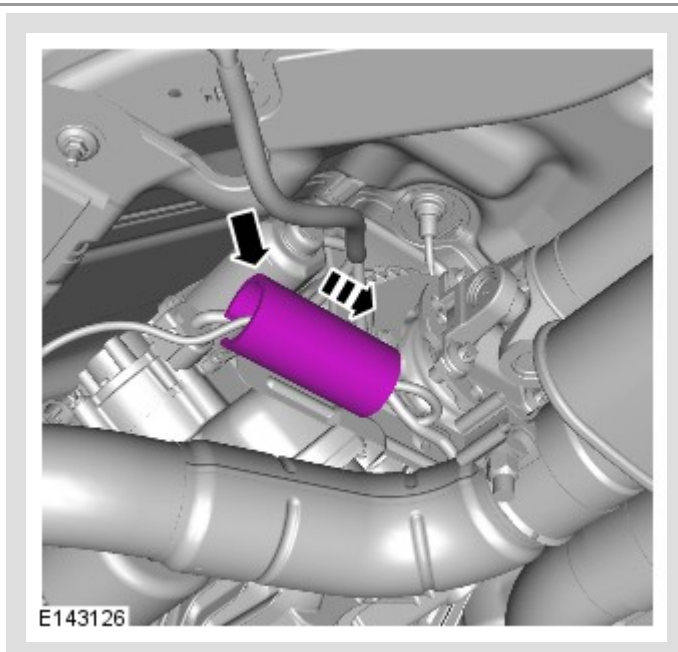


6.

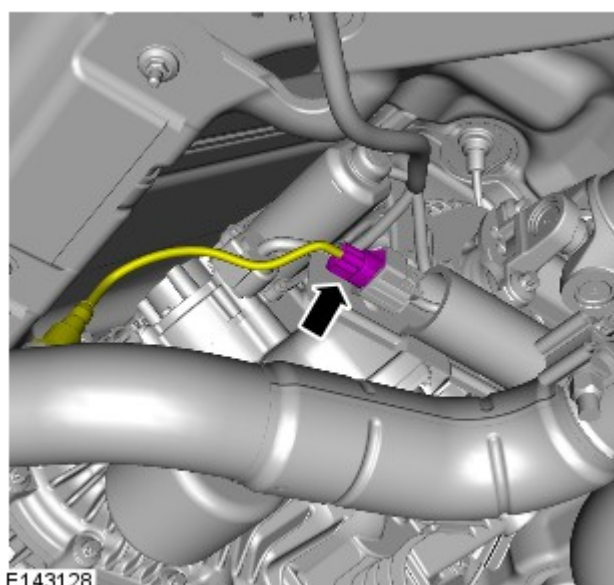


7.

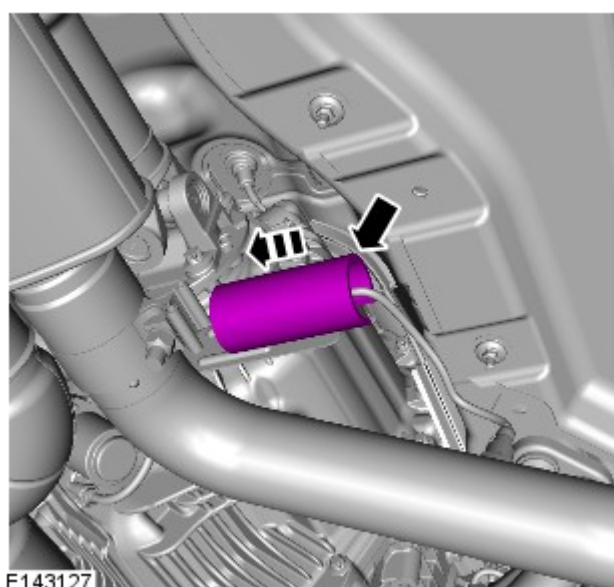


8.

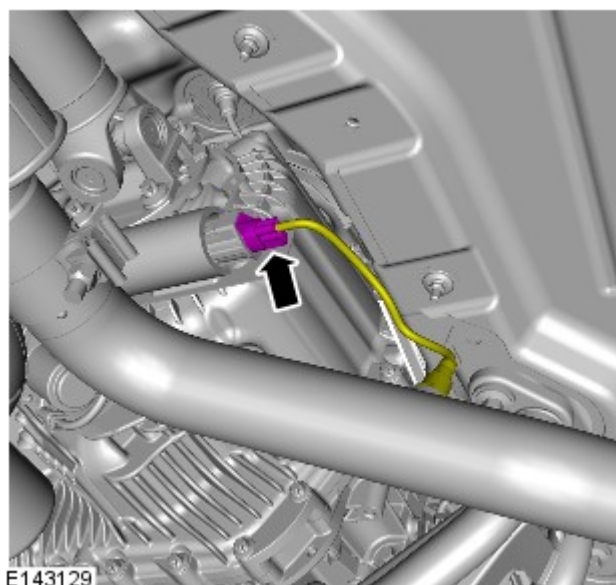


9.

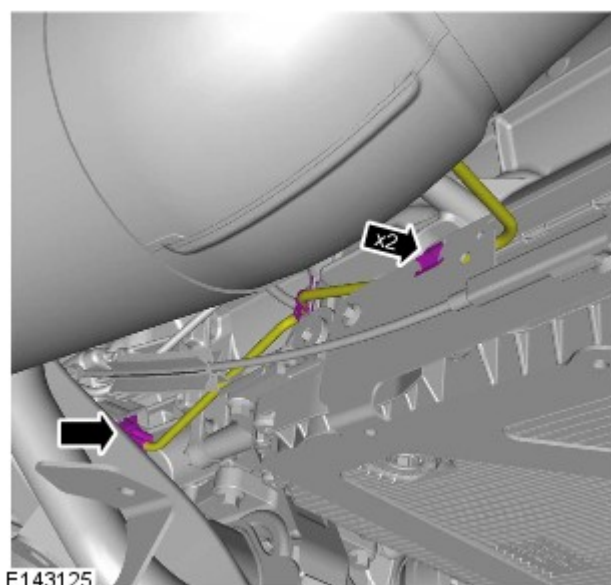

10.

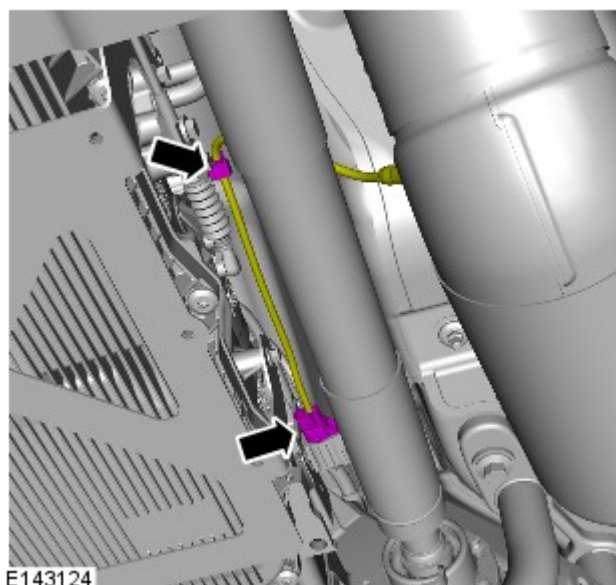


11.

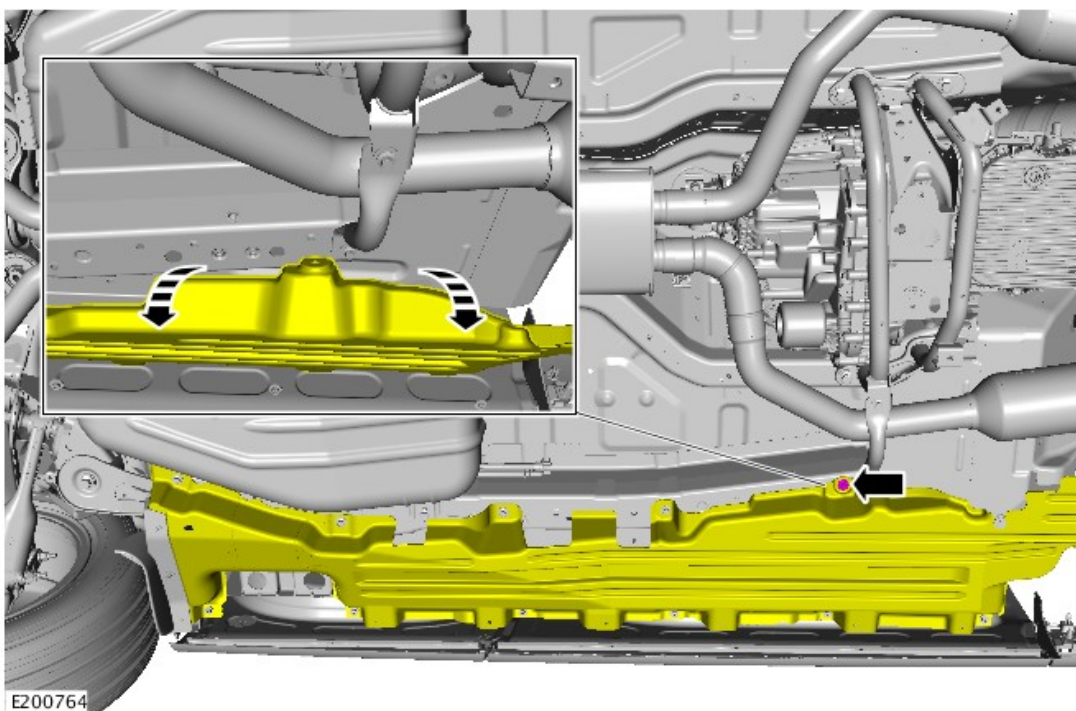

- Remove the nut.

- Using a suitable tool move the aeroshield down to gain access to the transmission support brace.

12.

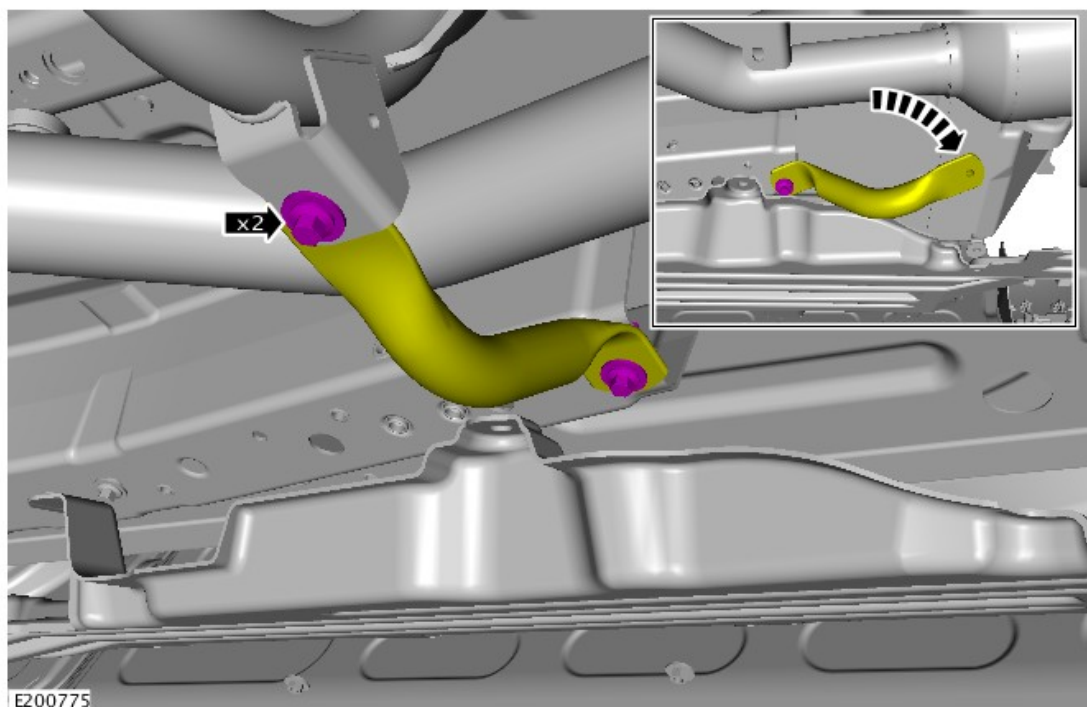


- Remove the bolt illustrated.
- Loosen the other bolt.
- Move the transmission support brace as illustrated.
Torque: 24 Nm

All vehicles

1.

⚠ CAUTION:


Make sure that the exhaust system is supported with suitable retaining straps.

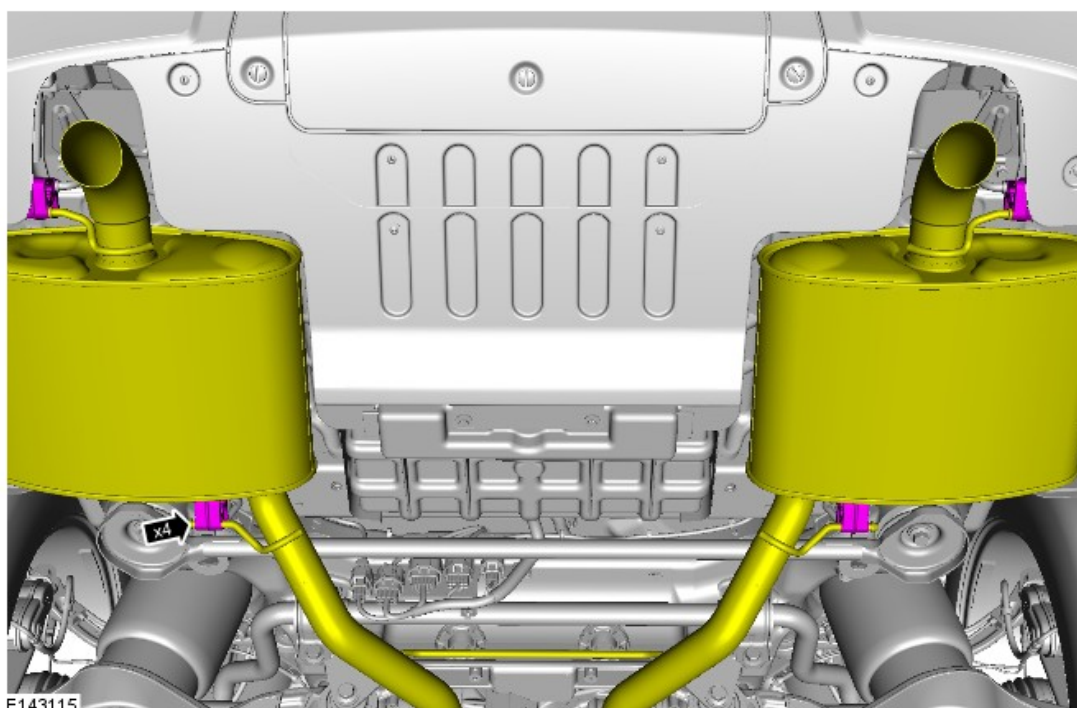


2.

△ NOTES:

- LH illustration shown, RH is similar.
- The step must be carried out on both sides.

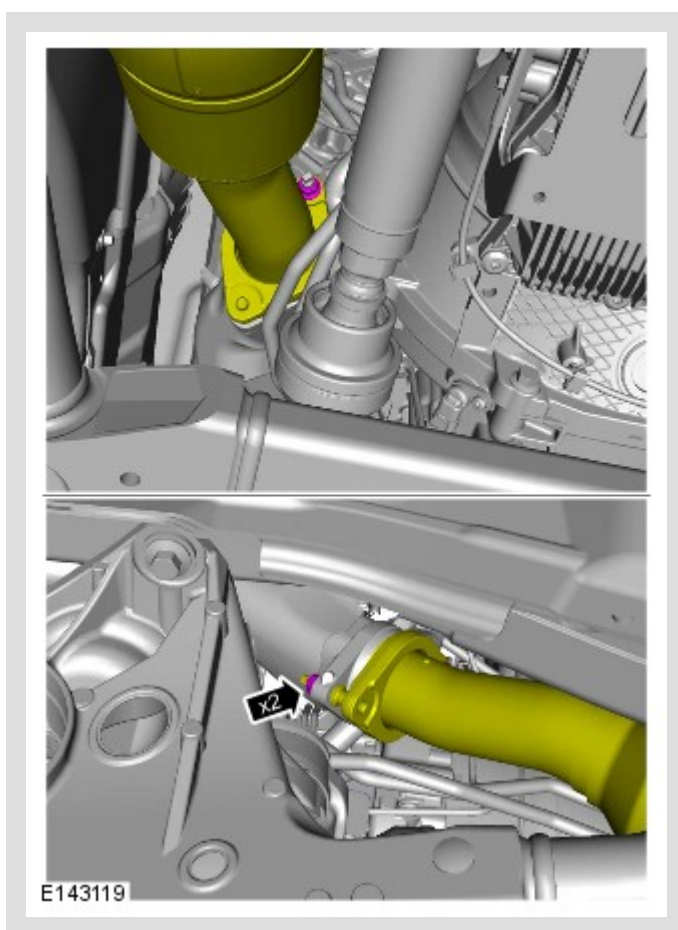


Torque: 40 Nm

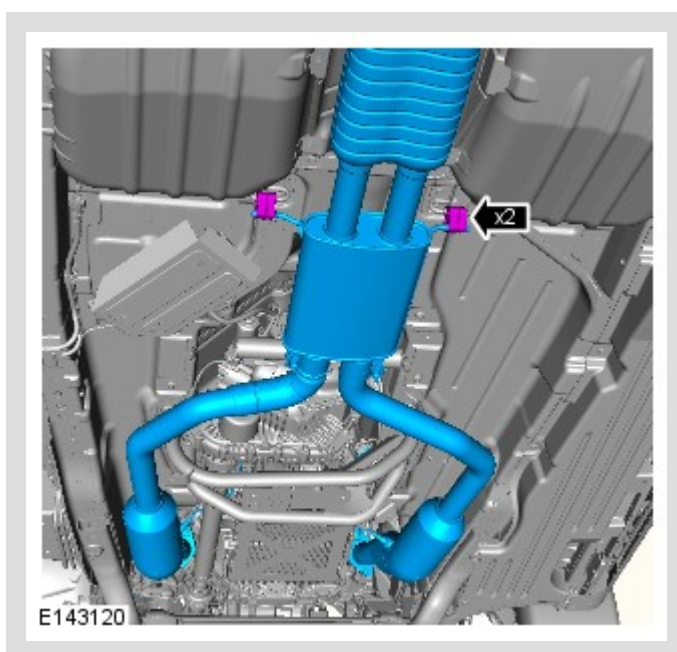

4.

 NOTE:

Do not disassemble further if the component is removed for access only.

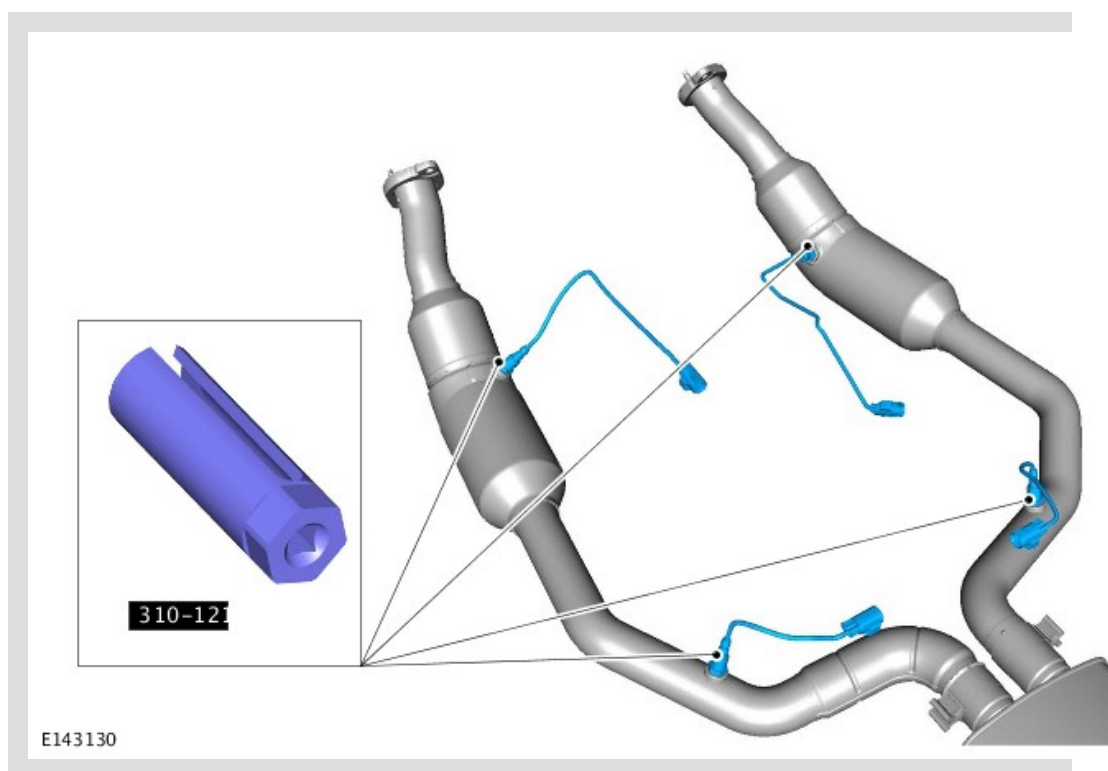

Special Tool(s): [310-121](#)

Torque: 48 Nm

INSTALLATION

1. To install, reverse the removal procedure.