


PUBLISHED: 31-JUL-2012
2014.0 RANGE ROVER (LG), 309-00

EXHAUST SYSTEM - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

FRONT MUFFLER (G1509423)

REMOVAL AND INSTALLATION

SPECIAL TOOL(S)

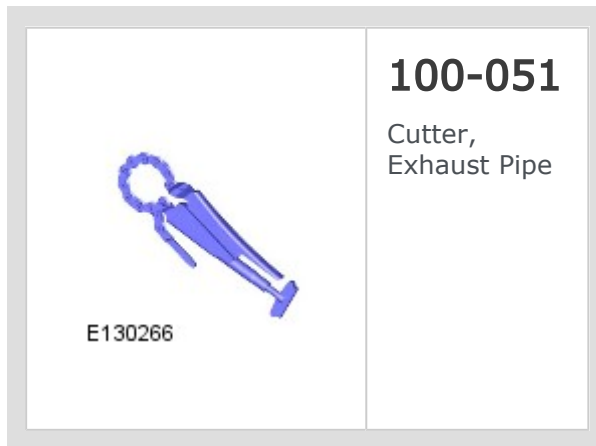

REMOVAL



WARNING:

Observe due care when working near a hot exhaust system.



NOTE:

Removal steps in this procedure may contain installation details.

1.




WARNING:

Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2.

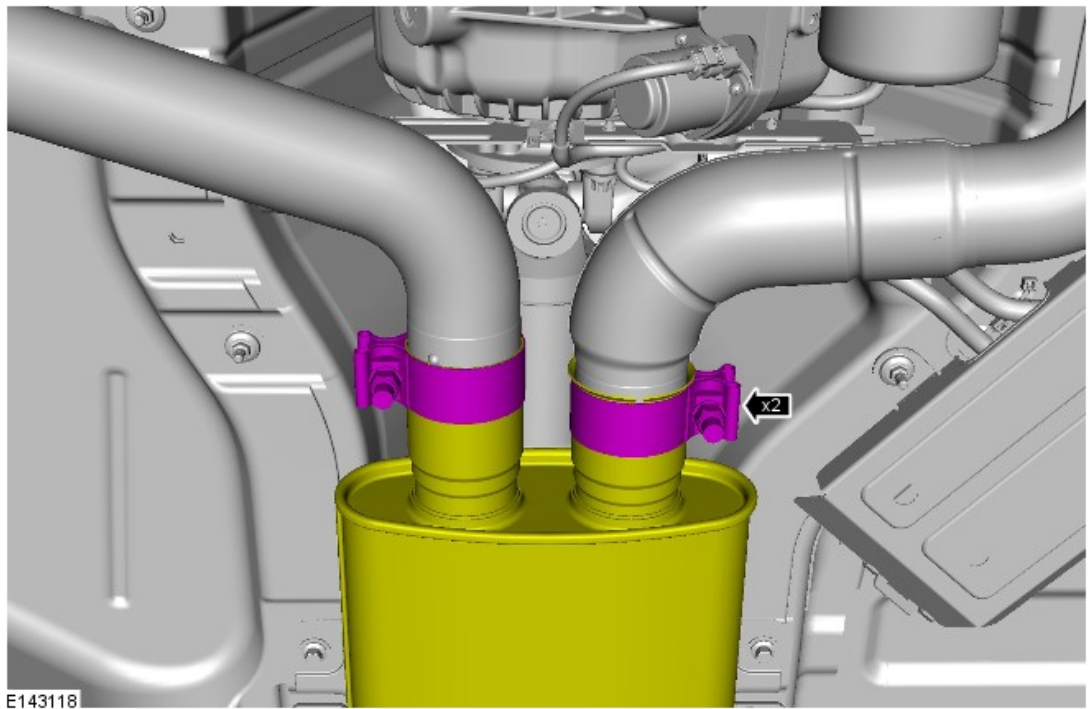


Torque: 55 Nm


3.



CAUTION:

Make sure that the exhaust system is supported with suitable retaining straps.

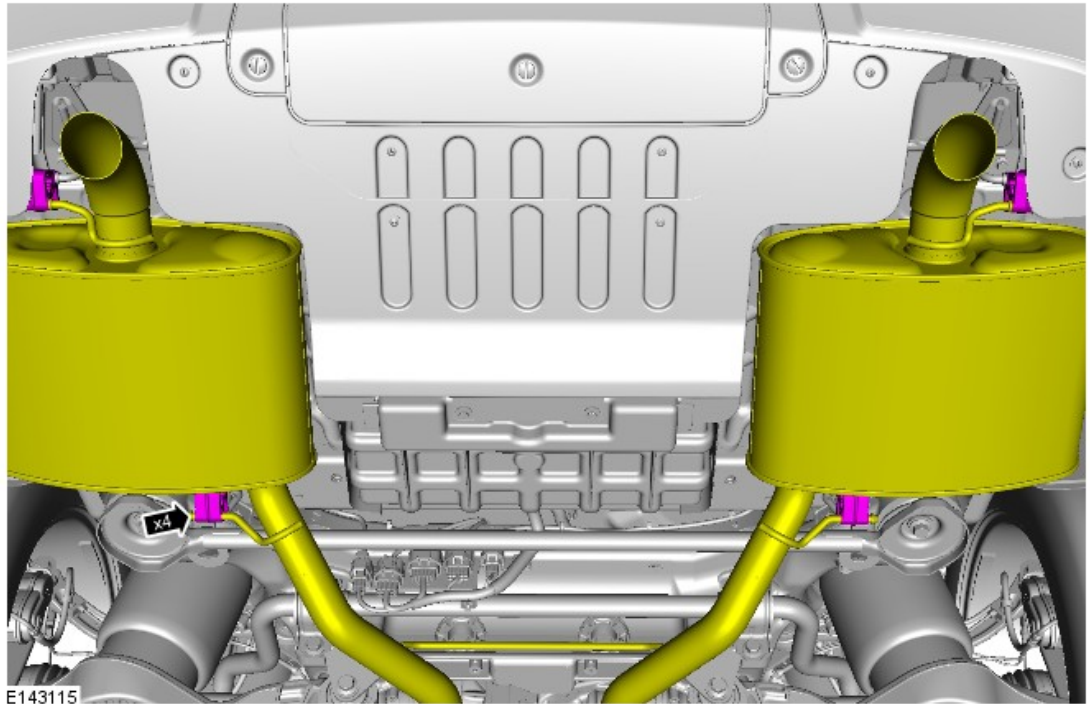


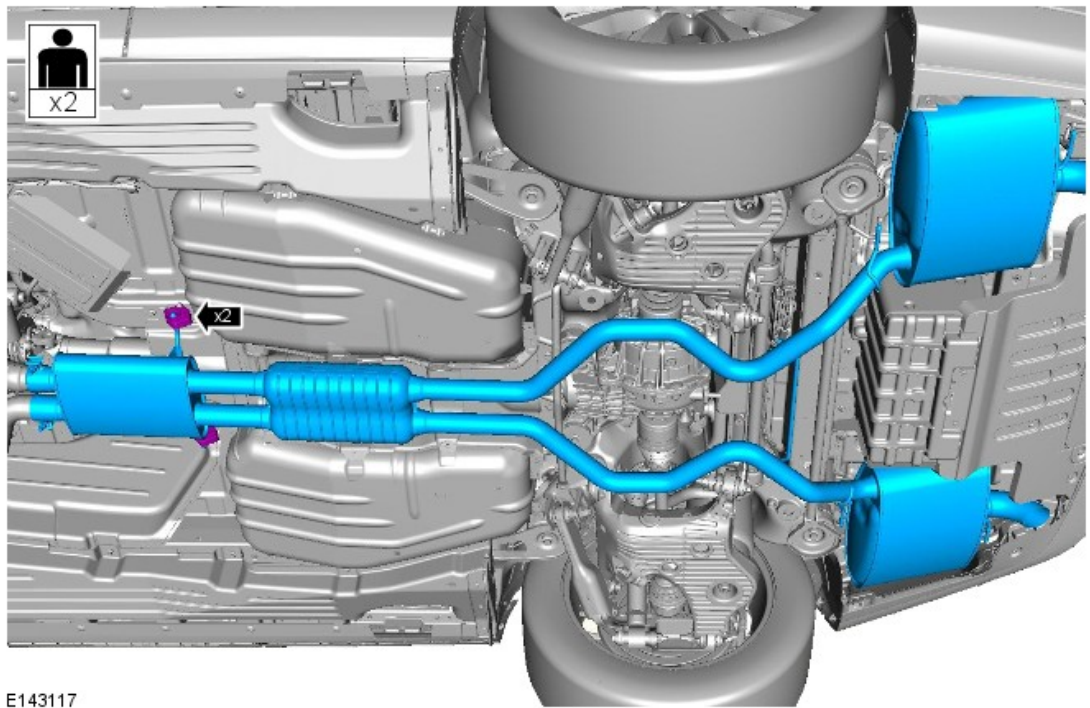

5.

 NOTE:

Do not disassemble further if the component is removed for access only.

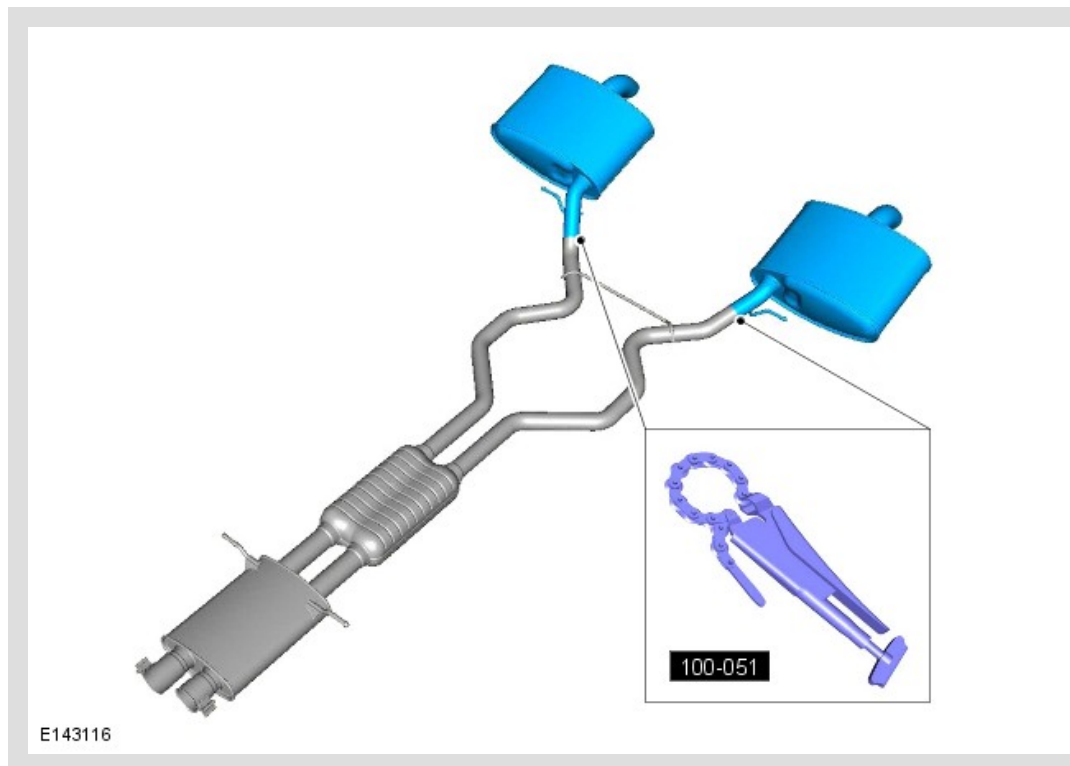

Special Tool(s): [100-051](#)

INSTALLATION

1.




WARNING:

Make sure that any corrosion or dirt is removed from the mating surfaces.



NOTE:

The step must be carried out on both sides.

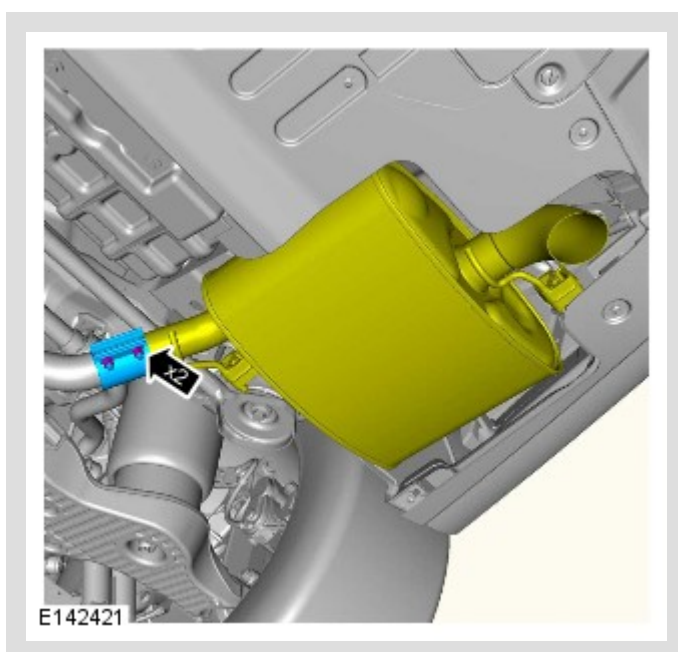

To install, reverse the removal procedure.

Torque: **55 Nm**